

TD-WM-BBU SERIES SINGLE OUTPUT DC UPS BATTERY BACK-UP POWER SUPPLIES RUGGED/WALL MOUNT

APPLICATIONS

The TD-WM-BBU Series satisfies an emerging market where "critical" continuous power is required. Designed as a complete system with power supply, charger and on board batteries, loaded with standard features the TD-WM-BBU Series is ideal for medical, industrial and communication applications.

STANDARD FEATURES

- Compact, Light Weight
- Rugged construction
- OV/OL/OT Protected
- Built-In On Board Premium Batteries
- Input and Battery Circuit Breakers
- Internal Cooling Fans
- Visual and Electronic Signals
- Low Voltage Battery Disconnect.

AVAILABLE OPTIONS

- Redundant Operation (N+1)
- MS Connectors
- 400 Hz Operation
- EMI Reduction (MIL-STD-461)
- Conformal Coating
- 3 Phase Input
- Ruggedized for Shock & Vibration
- Voltage and Current Meters



SPECIFICATIONS

ELECTRICAL

AC Input Voltage : 90-264VAC
AC Input Frequency: 47-63Hz Standard, 47-400Hz optional
Regulation: Line $\pm$.3%
Load + 2%
Ripple: 1% peak to peak, not to exceed 100mVpp
Efficiency: 85% typical
Output voltage adj: +10% on main output
Overvoltage Protection: Set at 120% of main output,
automatic recovery
Overload Protection: Current limiting, automatic recovery

MECHANICAL AND ENVIRONMENTAL

Operating Temperature:
0°C to + 50°C standard
-40°C to 75°C optional
Storage Temperature: -40°C to 85°C
Cooling: Internal ball bearing DC fan
Safety: Designed to meet UL 1950, CSA 1402 A
EMI: meets FCC Class A
Humidity: 90% non condensing
Size: 24" x 16" x 8"
Weight: Approx: 65lbs (deppending on battery type & size)

MODEL SELECTION

400 WATT POWER SUPPLY	
MODEL	OUTPUT
TD-WM-BBU-12-33	12V (13.5V) @ 33A
TD-WM-BBU-24-17	24V (27.6V) @ 17A
TD-WM-BBU-48-8	48V (54V) @ 8A
400 WATTS BACK-UP FOR 60 MIN	

600 WATT POWER SUPPLY	
MODEL	OUTPUT
TD-WM-BBU-12-50	12V (13.5V) @ 50A
TD-WM-BBU-24-25	24V (27.6V) @ 25A
TD-WM-BBU-48-12	48V (54V) @ 12A
600 WATTS BACK-UP FOR 50 MIN	

800 WATT POWER SUPPLY	
MODEL	OUTPUT
TD-WM-BBU-24-66	12V (27.6V) @ 66A
TD-WM-BBU-24-33	24V (27.6V) @ 33A
TD-WM-BBU-48-16	48V (54V) @ 16A
800 WATTS BACK-UP FOR 30 MIN	

1000 WATT POWER SUPPLY	
MODEL	OUTPUT
TD-WM-BBU-12-80	12V (13.5V) @ 80A
TD-WM-BBU-24-41	24V (27.6V) @ 41A
TD-WM-BBU-48-20	48V (54V) @ 20A
1000 WATTS BACK-UP FOR 15 MIN	


1500 WATT POWER SUPPLY	
MODEL	OUTPUT
TD-WM-BBU-12-125	12V (13.5V) @ 125A
TD-WM-BBU-24-63	24V (27.6V) @ 63A
TD-WM-BBU-48-32	48V (54V) @ 32A
1500 WATTS BACK-UP FOR 5 MIN	

NOTES:

ADDITIONAL SIZE BOXES ARE AVAILABLE FOR INCREASED POWER LEVELS AND BACK-UP TIMES.

MINIMUM QUANTITY PURCHASE REQUIRED ON MOST MODELS. OTHER VOLTAGES & CURRENTS ARE AVAILABLE CONTACT THE FACTORY FOR DETAILS.

MECHANICAL OUTLINE

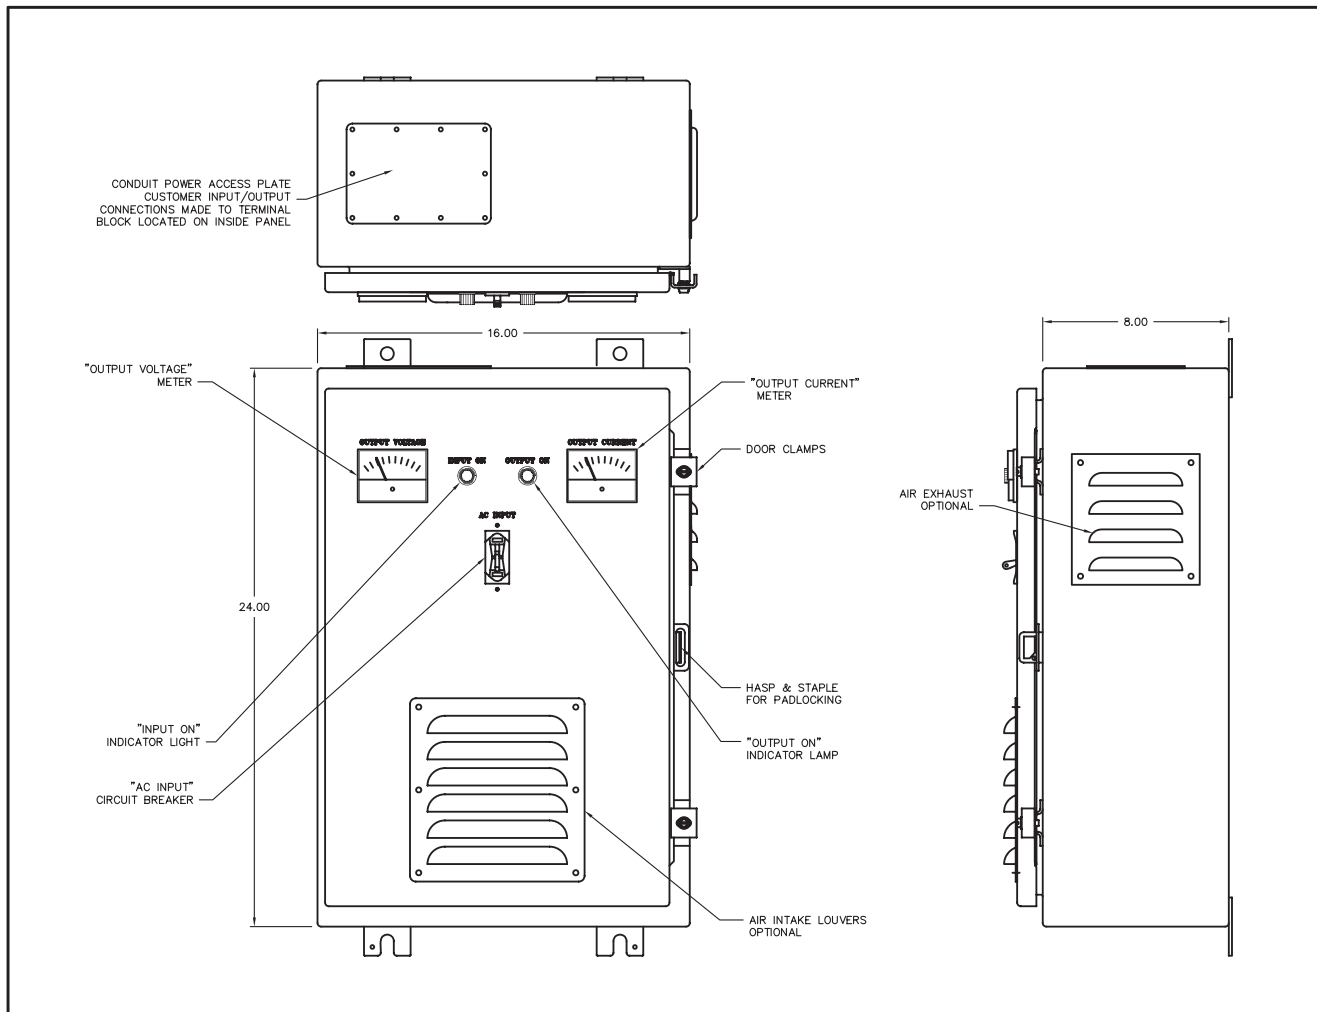

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

APPLIED POWER CONVERSION
division of
TECHNOLOGY DYNAMICS INC.
100 School Street, Bergenfield, NJ 07621
Phone: (201) 385-0500, Fax: (201) 385-0702
Website: www.theallpower.com