

OUTPUT VOLTAGE	OUTPUT CURRENT	OUTPUT POWER	MODEL NUMBER
			4.5 - 5.5 V INPUT
5 VDC	1000 mA	5W	TD1-5S0505
12 VDC	500 mA	6W	TD1-6S0512
15 VDC	400 mA	6W	TD1-6S0515
±5 VDC	±500 mA	5W	TD1-5D0505
±12 VDC	±250 mA	6W	TD1-6D0512
±15 VDC	±200 mA	6W	TD1-6D0515

ELECTRICAL SPECIFICATIONS

All Specifications Typical @+25°C, Nominal Line, and Full Load Unless Otherwise Noted.

INPUT SPECIFICATIONS


Nominal Line, 4.5-5.5V Input.....5VDC
Input Filter.....Pi Type
Reverse Voltage Protection.....Internal Shunt Diode
Use External Fuse

OUTPUT SPECIFICATIONS

Voltage Accuracy.....±2%, Max.
Minimum Load, Single.....Not Required
Dual.....20%
Line Regulation.....±1%, Max.
Load Regulation, Single NL-FL.....±2%, Max.
Dual, 20%FL-FL.....±5%, Max.
Ripple and Noise, 20MHz BW.....100mVp-p, Max.
Short Circuit Protection.....Continuous

GENERAL SPECIFICATIONS

Efficiency.....75% - 81%
Isolation Voltage, Input to Output.....1,500 VDC, Min.
Switching Frequency, 10W/15W.....200 KHz, Typ.
Operating Temperature Range.....-25°C to +71°C
Derating.....Derate Linearly from 100% at +71°C
to 0% at +100°C
Case Temperature.....+100°C
Storage Temperature Range.....-40°C to +100°C
Cooling.....Free Air Convection
Weight.....2.3 oz. (65 grams)
Case Material.....Metal with Non-Conductive Base

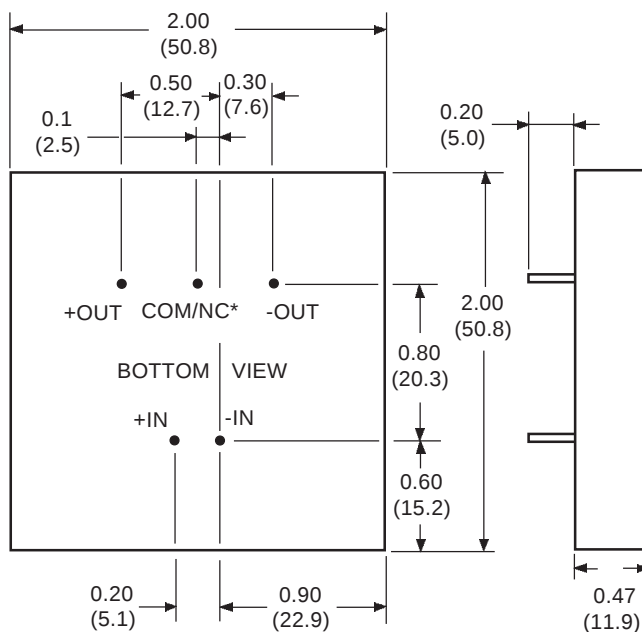

* NC (NO CONNECTION) ON SINGLE OUTPUT MODELS

PIN SIZE: 0.04 INCH (1.0 mm) DIA.

ALL DIMENSIONS IN INCHES (mm)