
TDA7499

LINEAR INTEGRATED CIRCUIT

6 + 6W STEREO AMPLIFIER WITH MUTE AND STAND-BY

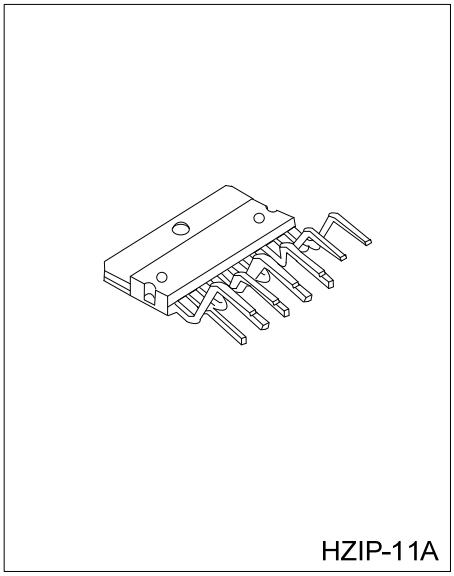

■ DESCRIPTION

The UTC **TDA7499** is class AB dual Audio Power Amplifier and designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

■ FEATURES

* Wide supply voltage range up to ±18V
* 6 + 6W @ THD =10%, R_L = 8Ω, V_S = +14V
* No POP at Turn-On/Off
* MUTE (POP free)
* STAND-BY feature (Low Iq)
* Short circuit protection to GND
* Thermal overload protection

■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
TDA7499L-J11-A-T	TDA7499G-J11-A-T	HZIP-11A	Tube

TDA7499L-J11-A-T
(1)Packing Type
(2)Package Type
(3)Lead Plating

(1) T: Tube
(2) J11-A:HZIP-11A
(3) H: Halogen Free, L: Lead Free

Copyright © 2009 Unisonic Technologies Co.,

■ PIN CONFIGURATION

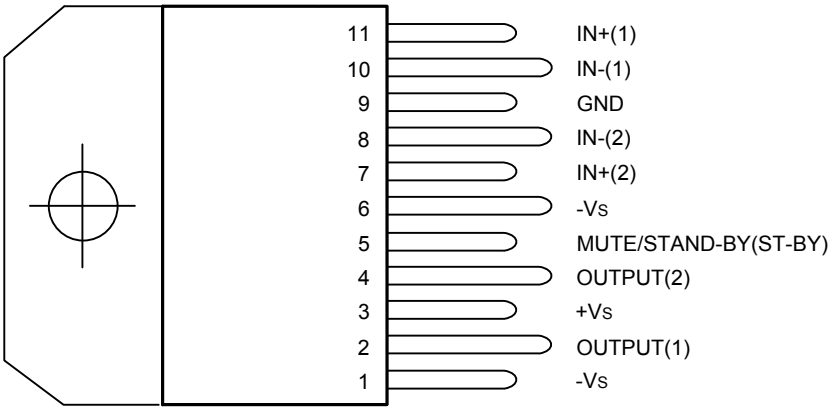

* TAB CONNECTED TO PIN 6

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
DC Supply Voltage	V_S	±20	V
Output Peak current (internally limited)	$I_{O(PEAK)}$	2.5	A
Power Dissipation (T_C=70°C)	P_D	23	W
Junction Temperature	T_J	150	°C
Operating Temperature	T_{OPR}	0 ~ +70	°C
Storage Temperature	T_{STG}	-40 ~ +150	°C

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Case	θ_{JC}	2.8	°C/W
Junction to Ambient	θ_{JA}	35	°C/W

■ ELECTRICAL CHARACTERISTICS

Refer to the test circuit, V_S = ± 14V, R_S =50Ω, G_V =30dB, f=1 KHz, Ta=25°C, unless otherwise specified.


PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Supply Range	V_S	R_L=8Ω		±5		±18	V
		R_L=4Ω		±5		±13.5	V
Input Offset Voltage	V_{OS}			-25		+25	mV
Total Input Noise	eN	A Curve			3		μV
		f=20Hz ~ 22KHz			4	8	μV
Total Quiescent Current	I_Q				50	90	mA
Output Bias Current	I_B				500		nA
Input Resistance	R_I			15	20		KΩ
Output Power	P_{OUT}	THD=10%	R_L=8Ω	8	10		W
			R_L=4Ω, V_S ± 11V		7.5		W
		THD=1%	R_L=8Ω	6	7.5		W
			R_L=4Ω, V_S ± 11V		6		W
Total Harmonic Distortion	THD	R_L=8Ω, P_{OUT}=1W, f=1KHz			0.03		%
		R_L=8Ω, P_{OUT}=0.1~ 5W, V_S ± 13V f=100Hz ~ 15KHz			0.2	0.5	%
		R_L=4Ω, P_{OUT}=1W, f=1KHz			0.02		%
		R_L=4Ω, P_{OUT}=0.1~ 4W, V_S ± 10V f=100Hz ~ 15KHz			0.2	1	%
Cross Talk	C_T	f=1KHz			70		dB
		f=10KHz		50	60		dB
Open Loop Voltage Gain	G_{OL}				80		dB
Supply Voltage Rejection (each channel)	SVR	fr=100Hz, Vr=0.5V			60		dB
Slew Rate	SR			6.5	10		V/μs
Thermal Shut-down Junction Temperature	T_J				145		°C
MUTE FUNCTION (ref: +Vs)							
Mute/Play Threshold	VT_{MUTE}			-7	-6	-5	V
Mute Attenuation	A_M			60	70		dB
STAND BY FUNCTION (ref: +Vs) (only For Split Supply)							
Stand-by/Mute Threshold	VT_{ST-BY}			-3.5	-2.5	-0.5	V
Quiescent Current @Stand-by	$I_{Q\ ST-BT}$				3	6	mA
Stand-by Attenuation	A_{ST-BY}				110		dB

■ MUTE/STAND-BY FUNCTION


MUTE/STAND-BY function is assembled at pin 5 and to control the amplifier status by two different thresholds, referred to $+V_S$.

- When Vpin5 higher than = $+V_S$ - 2.5V the amplifier is in Stand-by mode and the final stage generators are off
- When Vpin5 is between $+V_S$ - 2.5V and $+V_S$ - 6V the final stage current generators are switched on and the amplifier is in mute mode
- When Vpin5 is lower than $+V_S$ - 6V the amplifier is play mode.


■ TYPICAL APPLICATION CIRCUIT

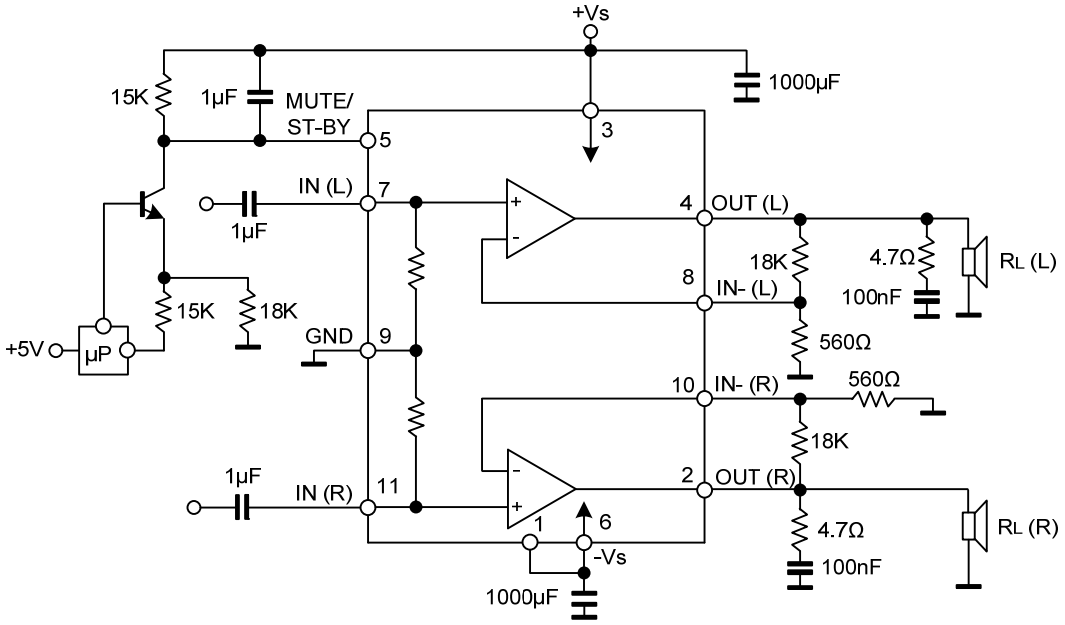

■ SINGLE SUPPLY APPLICATION

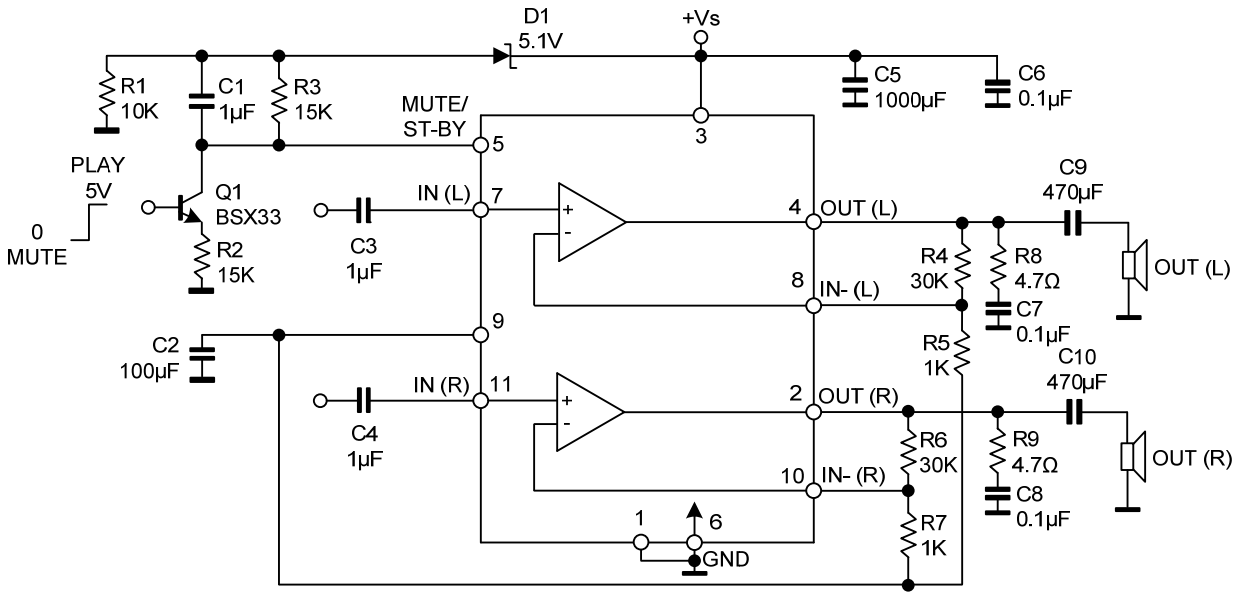

■ TEST AND APPLICATION CIRCUIT (STEREO CONFIGURATION)

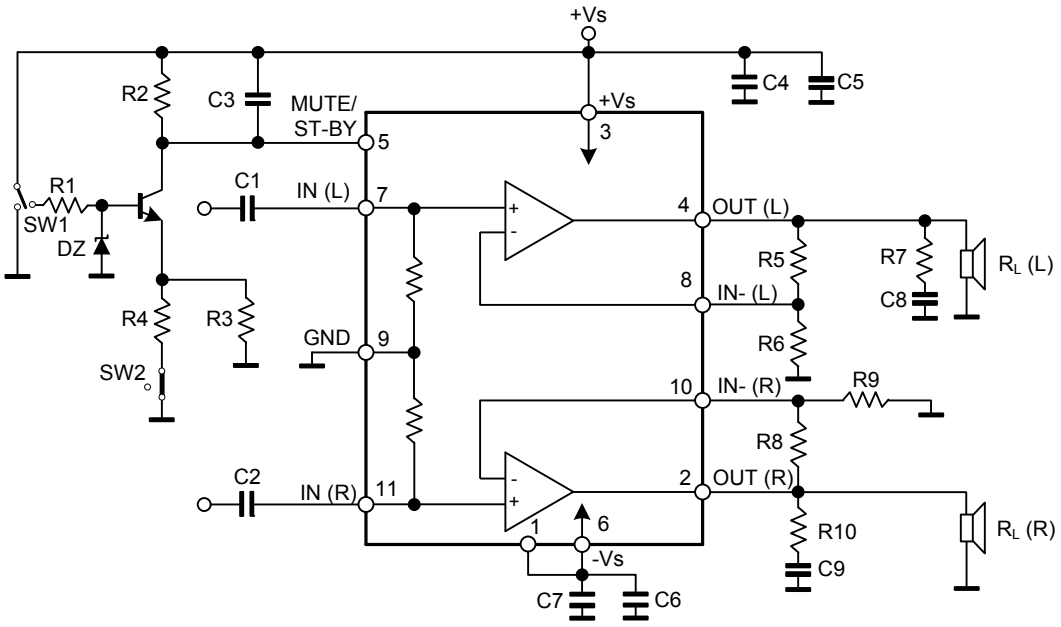

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.