
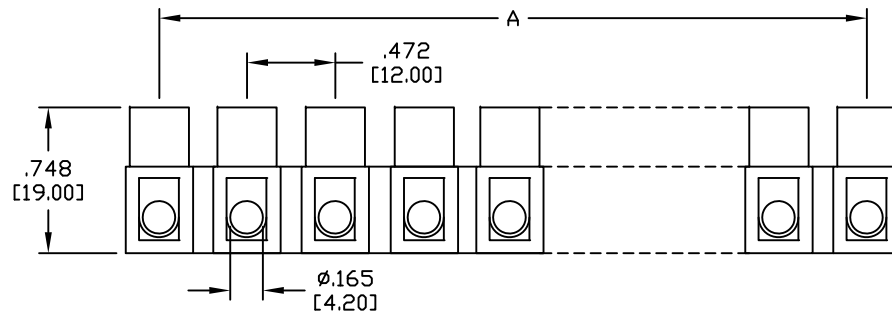
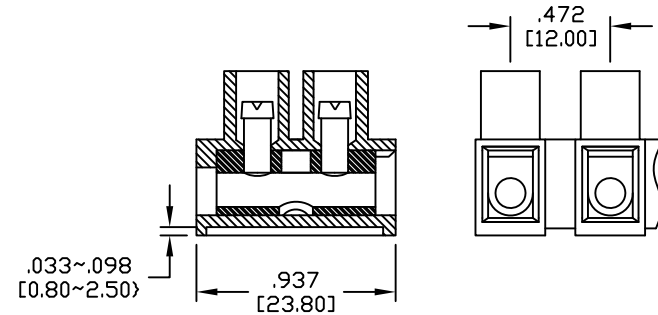


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/11	
A		REDRAWN	5/22/12	
B		ADDED SPEC	6/12/14	HR/AY
C		ADDED PIN NUMBER	6/3/16	AY/CH

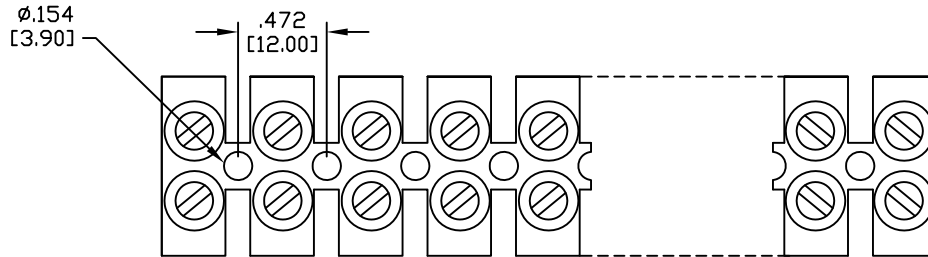

1 Pole = 2 Screws

Poles	ADAM P/N
1	TDD-02
2	TDD-04
3	TDD-06
4	TDD-08
5	TDD-10
6	TDD-12
7	TDD-14
8	TDD-16
9	TDD-18
10	TDD-20
11	TDD-22
12	TDD-24

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Terminal: Brass, Nickel plated

Screw: Steel, M3.5, Zinc plated

Electrical:

Operating voltage: 300 VAC max

Current rating: 35 Amps max

Insulation Resistance: 500 Mohms min @ 500V DC

Dielectric Withstanding Voltage: 2000V AC for 1 min.

Mechanical:

Recommended Screw Torque: 8.1kg-cm

Wire Range: 6.0mm²

Temperature Rating:

Operating temperature: -30°C to +105°C

Environmental:

Lead free, RoHS compliant.



A = .472 [12.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710		
APPROVALS			TITLE		
DRAWN SS			TERMIAL BLOCK, DUAL ROW		
CHECKED			12.0mm PITCH		
APPROVED			SIZE X	PART NO. TDD-XX	REV. C
REF: S00031T			SCALE: NTS		SHEET 1 OF 1