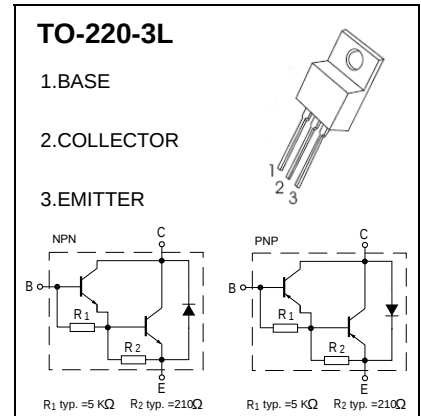
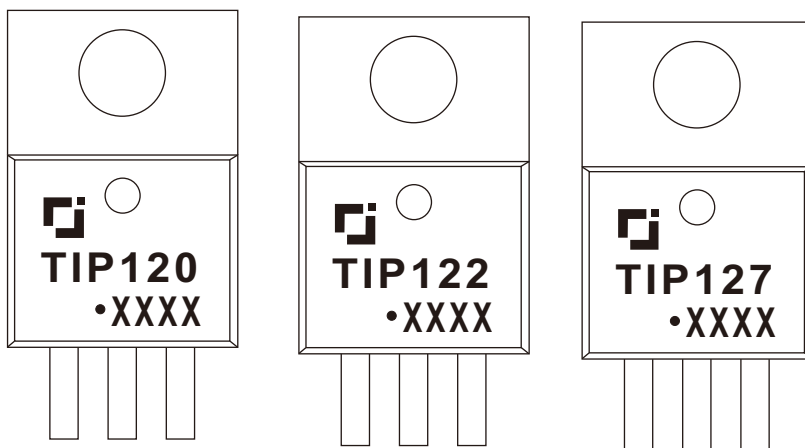


**TO-220-3L Plastic-Encapsulate Transistors****TIP120,121,122** Darlington TRANSISTOR (NPN)**TIP125,126,127** Darlington TRANSISTOR (PNP)**FEATURES**

- Medium Power Complementary Silicon Transistors

**MARKING**

TIP120/2/7=Device code

Solid dot=Green moldinn compound device,
if none,the normal device








XXXX=Code

MAXIMUM RATINGS (Ta=25℃ unless otherwise noted)


Symbol	Parameter	TIP120 TIP125	TIP121 TIP126	TIP122 TIP127	Unit
V _{CBO}	Collector-Base Voltage	60	80	100	V
V _{CEO}	Collector-Emitter Voltage	60	80	100	V
V _{EBO}	Emitter-Base Voltage	5			V
I _C	Collector Current -Continuous	5			A
P _C	Collector Power Dissipation	2			W
R _{θJA}	Thermal Resistance Junction to Ambient	62.5			℃/W
R _{θJC}	Thermal Resistance Junction to Case	1.92			℃/W
T _J ,T _{stg}	Operation Junction and Storage Temperature Range	-55to+150			℃

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage TIP120,TIP125 TIP121,TIP126 TIP122,TIP127	$V_{(BR)CBO}$	$I_C = 1\text{mA}, I_E = 0$	60 80 100		V
Collector-emitter breakdown voltage TIP120,TIP125 TIP121,TIP126 TIP122,TIP127	$V_{CEO(SUS)}$	$I_C = 30\text{mA}, I_B = 0$	60 80 100		V
Collector cut-off current TIP120,TIP125 TIP121,TIP126 TIP122,TIP127	I_{CBO}	$V_{CB} = 60\text{V}, I_E = 0$ $V_{CB} = 80\text{V}, I_E = 0$ $V_{CB} = 100\text{V}, I_E = 0$		0.2	mA
Collector cut-off current TIP120,TIP125 TIP121,TIP126 TIP122,TIP127	I_{CEO}	$V_{CE} = 30\text{V}, I_B = 0$ $V_{CE} = 40\text{V}, I_B = 0$ $V_{CE} = 50\text{V}, I_B = 0$		0.5	mA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$		2	mA
DC current gain	$h_{FE(1)}$	$V_{CE} = 3\text{V}, I_C = 0.5\text{A}$	1000		
	$h_{FE(2)}$	$V_{CE} = 3\text{V}, I_C = 3\text{A}$	1000	12000	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 3\text{A}, I_B = 12\text{mA}$ $I_C = 5\text{A}, I_B = 20\text{mA}$		2 4	V
Base-emitter voltage	V_{BE}	$V_{CE} = 3\text{V}, I_C = 3\text{A}$		2.5	V
Output Capacitance TIP125,TIP126,TIP127 TIP120,TIP121,TIP122	C_{ob}	$V_{CB} = 10\text{V}, I_E = 0, f = 0.1\text{MHz}$		300 200	pF

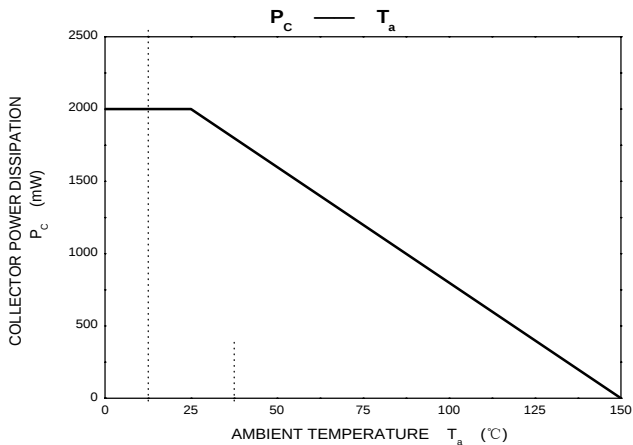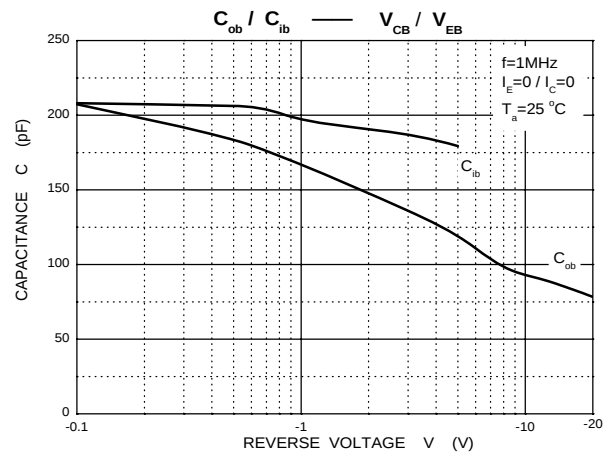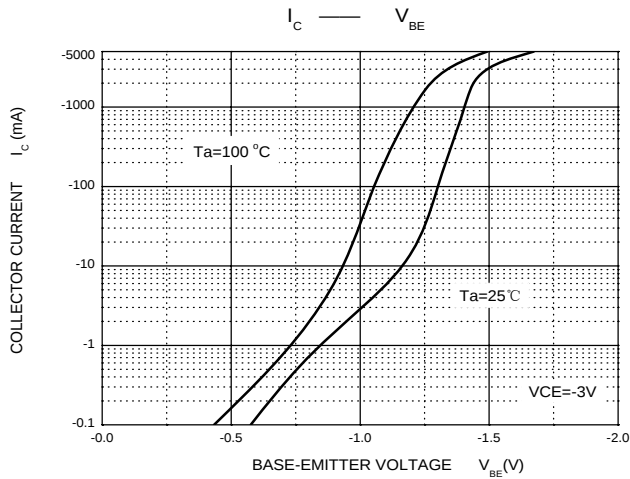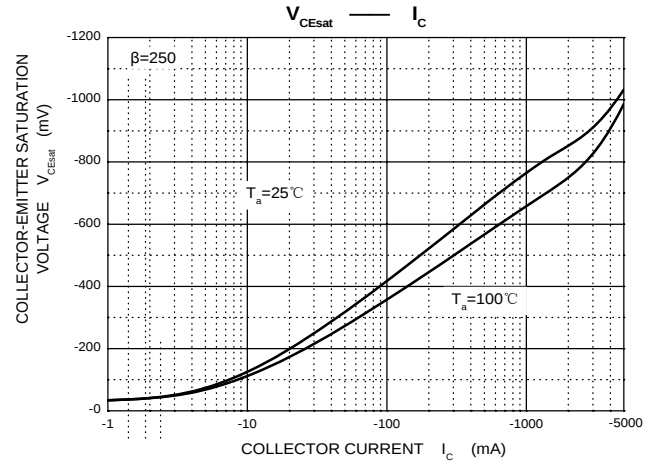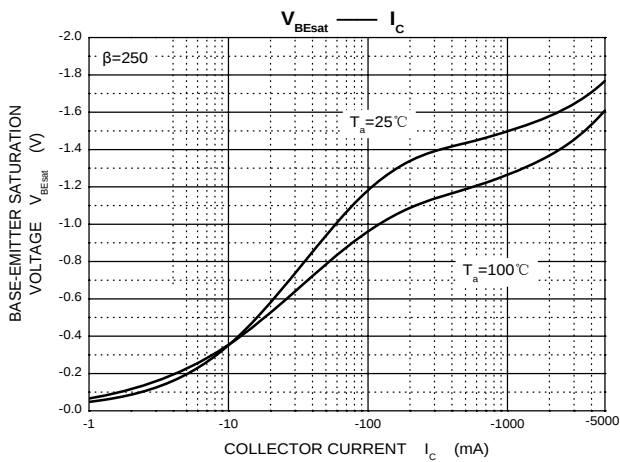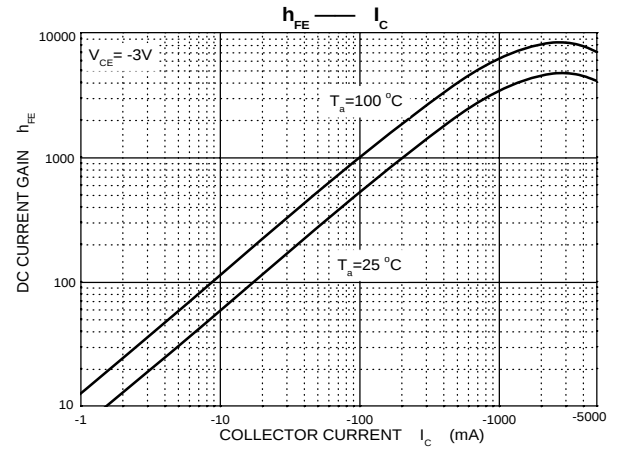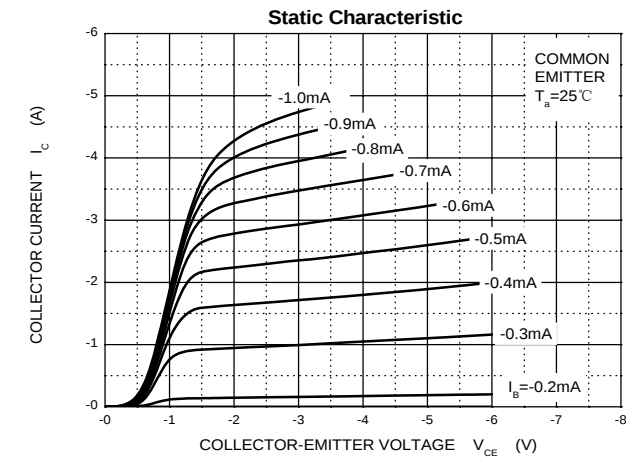

TO-220-3L Package Outline Dimensions

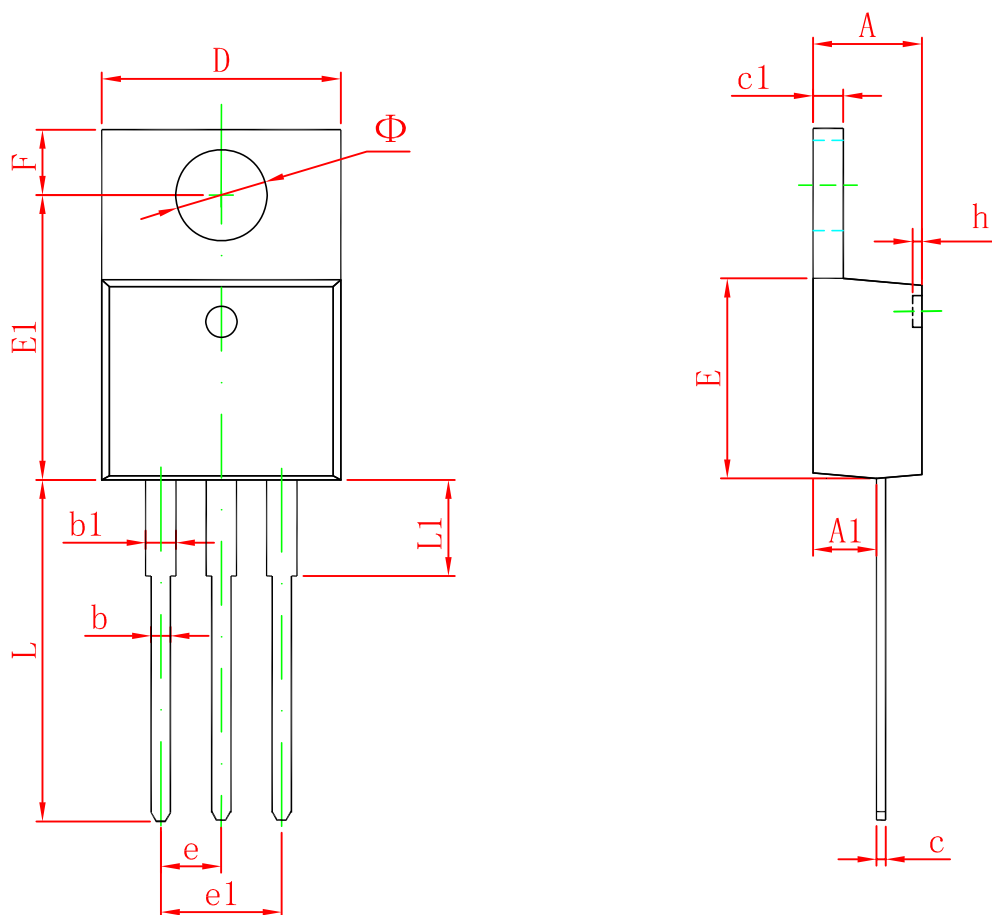

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
Φ	3.735	3.935	0.147	0.155