

TEMPERATURE SENSOR IC

FEATURES

- Linear Output Voltage 10 mV/°C Output
- 4.5 to 10.0 V Supply Range
- Miniature Package (SOT-25)
- Minimum External Parts Count
- Low Power Consumption

APPLICATIONS

- Home and Industrial Thermostats
- Automotive Climate Control
- Battery Charger Temperature Monitor
- Notebook Computer Temperature Monitor
- Electronic Thermometers
- Fish Finder Water Temperature
- Industrial Process Controllers
- Home Appliance Temperature Control

DESCRIPTION


The TK11041 is a temperature sensor IC with a linear output of 10 mV/°C over the range of -30 to +105 °C. Its wide operating voltage range of 4.5 to 10.0 V makes it suitable for a number of applications requiring accurate temperature control, such as electronic thermostats for climate control, refrigerators, and industrial process controls.

A typical application is to make a digital representation of temperature with an A/D converter, or to make a thermal detector with a comparator.

The TK11041 has a compensation pin for a 0.1 μF capacitor that ensures stability over the IC's operating temperature range.

The TK11041 is available in a miniature SOT-25 surface mount package.

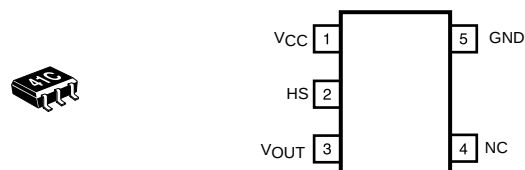TK11041



Note: Connect pin 2 to GND

ORDERING INFORMATION


TK11041M-1



Tape/Reel Code

TAPE/REEL CODE
TL: Tape Left

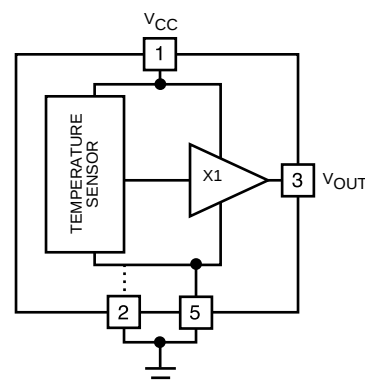BLOCK DIAGRAM



TK11041

ABSOLUTE MAXIMUM RATINGS

Supply Voltage	12 V	Storage Temperature Range	-55 to +150 °C
Operating Voltage	4.5 to 10 V	Operating Temperature Range	-30 to +105 °C
Power Dissipation (Note 1)	150 mW	Lead Soldering Temperature (10 s)	235 °C
Junction Temperature	150 °C		

TK11041 ELECTRICAL CHARACTERISTICS

Test Conditions: $V_{CC} = 5.0\text{ V}$, $I_{OUT} = 0\text{ }\mu\text{A}$, $T_A = 25\text{ }^\circ\text{C}$, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V_{OUT}	Output Voltage	$T_A = 25\text{ }^\circ\text{C}$	2.952	2.982	3.012	V
		$T_A = 85\text{ }^\circ\text{C}$	3.543	3.583	3.623	V
		$T_A = -30\text{ }^\circ\text{C}$		2.431		V
T_C	Temperature Coefficient	$T_A = 25\text{ }^\circ\text{C}$ to $85\text{ }^\circ\text{C}$	9.2	10.02	10.8	mV/°C
Line Reg	Line Regulation	$V_{CC} = 5$ to 10 V	-15	2	15	mV
Load Reg	Load Regulation	$I_{OUT} = 0$ to $100\text{ }\mu\text{A}$	0	2	15	mV
I_{CC}	Supply Current	$T_A = 25\text{ }^\circ\text{C}$		110	180	μA
I_{OUT}	Output Current	$\Delta V_{OUT} \leq 20\text{ mV}$			400	μA

Note 1: Power dissipation is 150 mW when mounted as recommended. Derate at 1.2 mW/°C for operation above 25 °C.


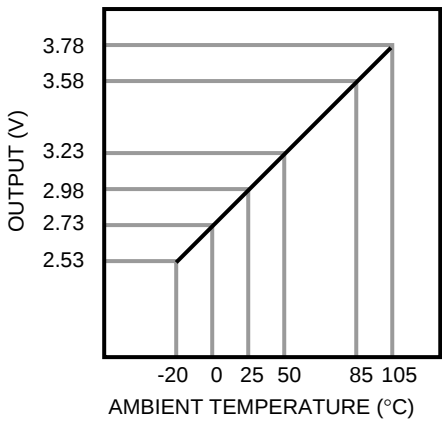


FIGURE 1. OUTPUT CHARACTERISTICS






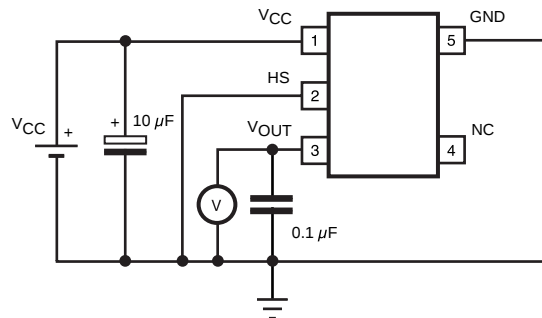
TEST CIRCUIT



Note: Connect pin 2 to ground


TYPICAL PERFORMANCE CHARACTERISTICS

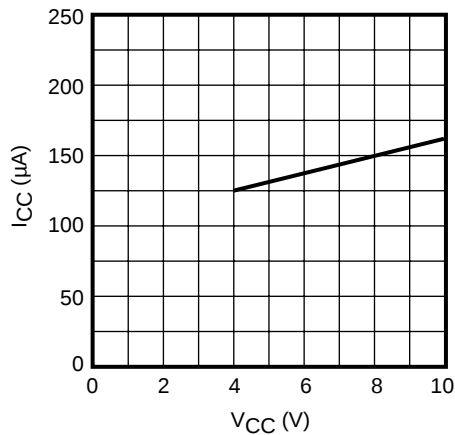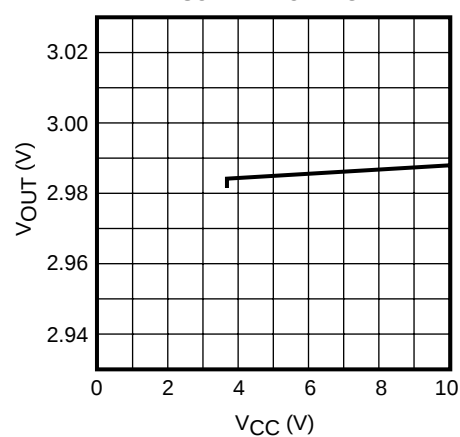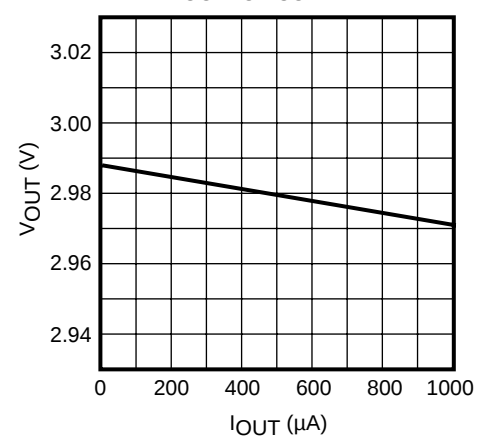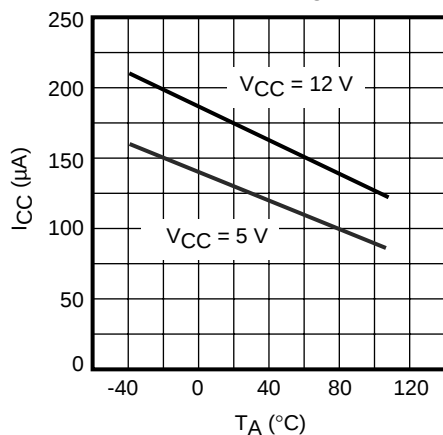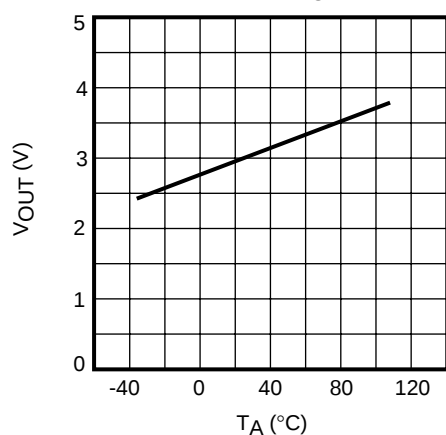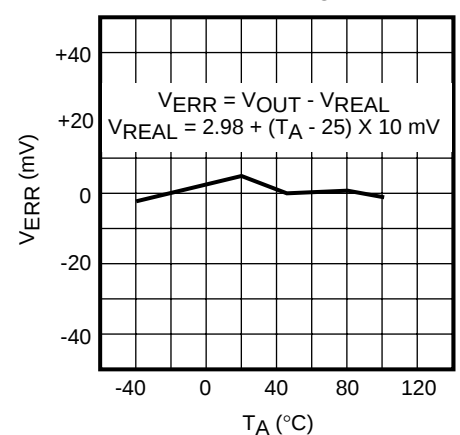$V_{CC} = 5\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified.

SUPPLY CURRENT vs.
SUPPLY VOLTAGEOUTPUT VOLTAGE vs.
SUPPLY VOLTAGEOUTPUT VOLTAGE vs.
OUTPUT CURRENTSUPPLY CURRENT vs.
TEMPERATUREOUTPUT VOLTAGE vs.
TEMPERATURELINEARITY ERROR vs.
TEMPERATURE

PACKAGE OUTLINE

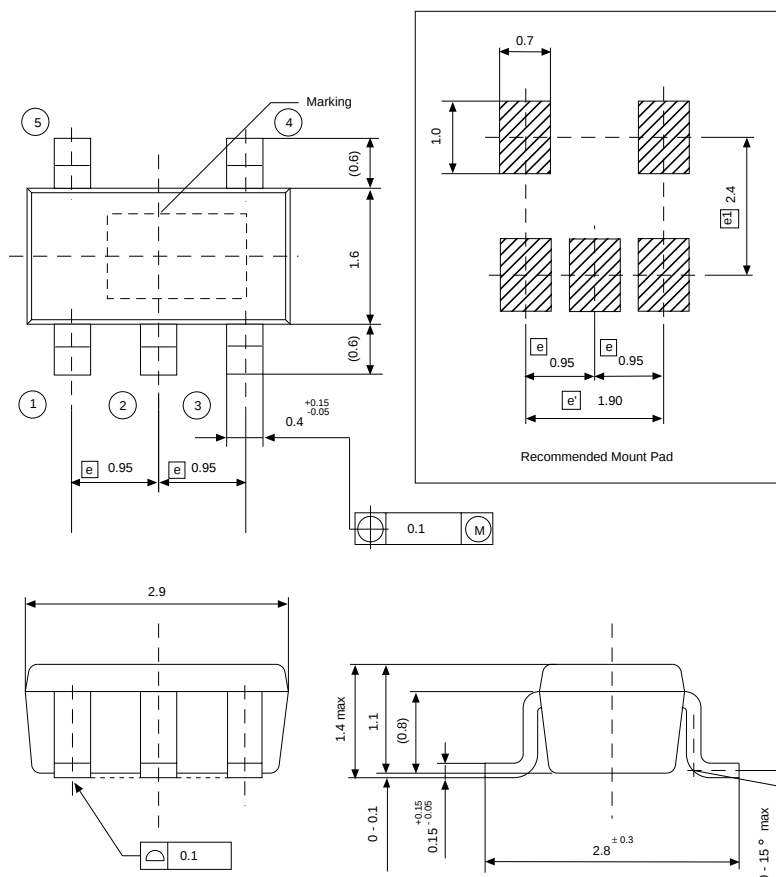SOT-25 (SOT-23-5)



Dimensions are shown in millimeters
Tolerance: x.x = ± 0.2 mm (unless otherwise specified)

Marking Information

TK11041

Marking
41C

Toko America, Inc. Headquarters
1250 Feehanville Drive, Mount Prospect, Illinois 60056
Tel: (847) 297-0070 Fax: (847) 699-7864

TOKO AMERICA REGIONAL OFFICES

Midwest Regional Office
Toko America, Inc.
1250 Feehanville Drive
Mount Prospect, IL 60056
Tel: (847) 297-0070
Fax: (847) 699-7864

Western Regional Office
Toko America, Inc.
2480 North First Street, Suite 260
San Jose, CA 95131
Tel: (408) 432-8281
Fax: (408) 943-9790

Eastern Regional Office
Toko America, Inc.
107 Mill Plain Road
Danbury, CT 06811
Tel: (203) 748-6871
Fax: (203) 797-1223

Semiconductor Technical Support
Toko Design Center
4755 Forge Road
Colorado Springs, CO 80907
Tel: (719) 528-2200
Fax: (719) 528-2375

Visit our Internet site at <http://www.tokoam.com>

The information furnished by TOKO, Inc. is believed to be accurate and reliable. However, TOKO reserves the right to make changes or improvements in the design, specification or manufacture of its products without further notice. TOKO does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. No license is granted by implication or otherwise under any patent or patent rights of TOKO, Inc.