
PART NO.	"A" REF. APPROXIMATE OVERALL HEIGHT	"B" REF. WIRE BUNDLE
TL–250	.90 (22.9)	.20–.30 (5.1–7.6)
TL–350	1.03 (26.2)	.30–.40 (7.6–10.2)
TL–450	1.20 (30.5)	.40–.50 (10.2–12.7)
TL–600	1.33 (33.7)	.55–.65 (14.0–16.5)
TL–750	1.55 (39.4)	.70–.80 (17.8–20.3)
TL–950	1.70 (43.4)	MAX 1.00 (25.4)
TL–1125	2.19 (55.6)	MAX 1–3/16 (30.2)
TL–1375	2.68 (68.1)	MAX 1–7/16 (36.5)
TL–1500	2.93 (74.4)	MAX 1–9/16 (39.7)
TL–1750	3.45 (87.6)	MAX 1–13/16 (46.0)

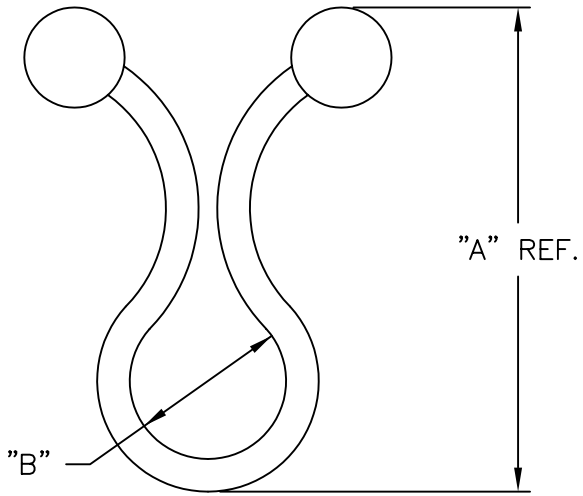

NOTES:
1. MATERIAL: NYLON 6/6 (RMS–01).
   FLAME RETARDANT NYLON (RMS–19)
   AVAILABLE BY SPECIAL ORDER
   SPECIFIED MATERIALS COMPLY WITH STANDARD SS–00259–1.
2. COLOR: NATURAL.
3. BLACK, RED, GREEN, & YELLOW
   AVAILABLE BY SPECIAL ORDER.

REV	DESCRIPTION	ENGR DATE
G	SEE ECN #596 FOR CHANGES	SM 03.12.03
F	ADDED FLAME RET. NOTE– ECN #516	SM 11.11.02
E	ADDED NOTE 3	SJ 03.13.02
D	CHANGED FILE NO. AND TITLE BLOCK	SM 05.31.01
C	RANGE OF 1125 THRU 1750 CHANGED "B" DIM TOLERANCE REMOVED	JP 8/15/94
B	P/N TL–600 AND 950 ADDED	PB 8/8/94
A	P/N TL–1125/1375/1500 AND 1750 ADDED	JP 7/22/94

TITLE: TWIST–LOK

DWG IN IN (MM)

TOLERANCES UNLESS NOTED
.XX=±.010
.XXX=±.005
FRAC=±1/64
ANG=±1°

FILE # TL
MAT'L: SEE NOTES
RE: RICHCO, INC.

DWN: P.B. APP:
DT: 03–22–94 DT:

RICHCO INC.
PO BOX 804238,CHICAGO,60680
(773) 539–4060

FINAL

PART # SEE TABLE

PRINT TYPE CA