

TL071
TL071A - TL071B

LOW NOISE J-FET SINGLE OPERATIONAL AMPLIFIERS

- WIDE COMMON-MODE (UP TO V_{CC}^+) AND DIFFERENTIAL VOLTAGE RANGE
- LOW INPUT BIAS AND OFFSET CURRENT
- LOW NOISE e_n = 15nV/√Hz (typ)
- OUTPUT SHORT-CIRCUIT PROTECTION
- HIGH INPUT IMPEDANCE J–FET INPUT STAGE
- LOW HARMONIC DISTORTION : 0.01% (typ)
- INTERNAL FREQUENCY COMPENSATION
- LATCH UP FREE OPERATION
- HIGH SLEW RATE : 16V/µs (typ)



N
DIP8
(Plastic Package)



D
SO8
(Plastic Micropackage)

DESCRIPTION


The TL071, TL071A and TL071B are high speed J–FET input single operational amplifiers incorporating well matched, high voltage J–FET and bipolar transistors in a monolithic integrated circuit.

The devices feature high slew rates, low input bias and offset currents, and low offset voltage temperature coefficient.

ORDER CODES


Part Number	Temperature Range	Package	
		N	D
TL071M/AM/BM	–55°C, +125°C	•	•
TL071I/AI/BI	–40°C, +105°C	•	•
TL071C/AC/BC	0°C, +70°C	•	•
Example : TL071CN			

PIN CONNECTIONS (top view)

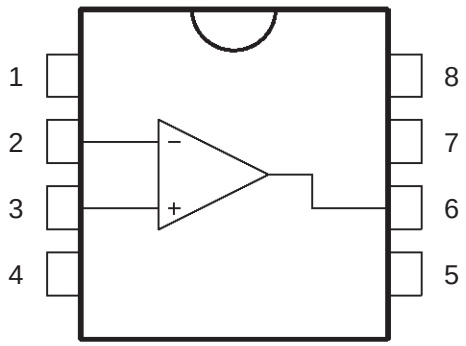


1 - Offset Null 1
2 - Inverting input
3 - Non-inverting input
4 - V_{CC}^-
5 - Offset Null 2
6 - Output
7 - V_{CC}^+
8 - N.C.

SCHEMATIC DIAGRAM

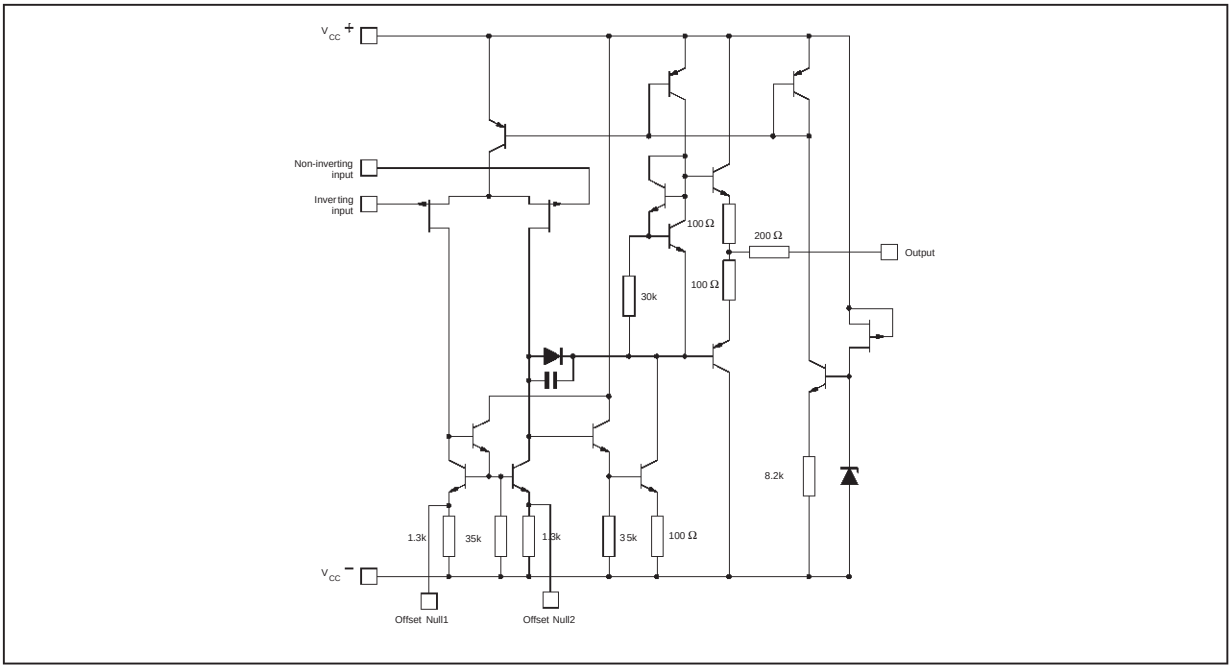

INPUT OFFSET VOLTAGE NULL CIRCUITS

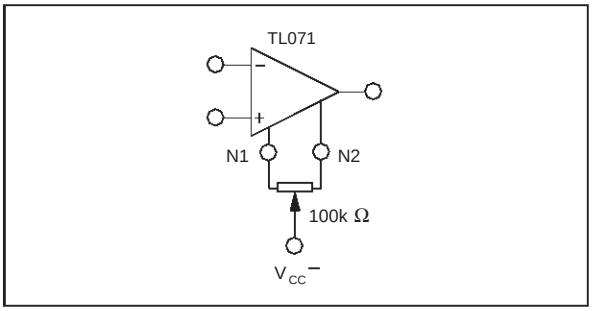

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
V_{CC}	Supply Voltage - (note 1)		±18	V
V_i	Input Voltage - (note 3)		±15	V
V_{id}	Differential Input Voltage - (note 2)		±30	V
P_{tot}	Power Dissipation		680	mW
	Output Short-circuit Duration - (note 4)		Infinite	
T_{oper}	Operating Free Air Temperature Range	TL071C,AC,BC TL071I,AI,BI TL071M,AM,BM	0 to 70 –40 to 105 –55 to 125	°C
T_{stg}	Storage Temperature Range		–65 to 150	°C

Notes :
1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between V_{CC}^+ and V_{CC}^-.
2. Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
4. The output may be shorted to ground or to either supply. Temperature and /or supply voltages must be limited to ensure that the dissipation rating is not exceeded.


ELECTRICAL CHARACTERISTICS

V_{CC} = ±15V, T_{amb} = 25°C (unless otherwise specified)


Symbol	Parameter		TL071I,M,AC,AI, AM,BC,BI,BM			TL071C			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
V_{io}	Input Offset Voltage (R_S = 50Ω) T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$ 	TL071 TL071A TL071B TL071 TL071A TL071B		3 3 1	10 6 3 13 7 5		3	10 13	mV
DV_{io}	Input Offset Voltage Drift			10			10		µV/°C
I_{io}	Input Offset Current * T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$			5	100 4		5	100 10	pA nA
I_{ib}	Input Bias Current * T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$			20	200 20		20	200 20	pA nA
A_{vd}	Large Signal Voltage Gain (R_L = 2kΩ, V_O = ±10V) T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$		50 25	200		25 15	200		V/mV
SVR	Supply Voltage Rejection Ratio (R_S = 50Ω) T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$		80 80	86		70 70	86		dB
I_{CC}	Supply Current, no Load T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$			1.4	2.5 2.5		1.4	2.5 2.5	mA
V_{icm}	Input Common Mode Voltage Range		±11	+15 -12		±11	+15 -12		V
CMR	Common Mode Rejection Ratio (R_S = 50Ω) T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$		80 80	86		70 70	86		dB
Ios	Output Short-circuit Current T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$		10 10	40	60 60	10 10	40	60 60	mA
$\pm V_{OPP}$	Output Voltage Swing T_{amb} = 25°C $T_{min.} \le T_{amb} \le T_{max.}$ 	R_L = 2kΩ R_L = 10kΩ R_L = 2kΩ R_L = 10kΩ	10 12 10 12	12 13.5		10 12 10 12	12 13.5		V
SR	Slew Rate (V_{in} = 10V, R_L = 2kΩ, C_L = 100pF, T_{amb} = 25°C, unity gain)		8	16		8	16		V/µs
t_r	Rise Time (V_{in} = 20mV, R_L = 2kΩ, C_L = 100pF, T_{amb} = 25°C, unity gain)			0.1			0.1		µs
K_{OV}	Overshoot (V_{in} = 20mV, R_L = 2kΩ, C_L = 100pF, T_{amb} = 25°C, unity gain)			10			10		%
GBP	Gain Bandwidth Product (f = 100kHz, T_{amb} = 25°C, V_{in} = 10mV, R_L = 2kΩ, C_L = 100pF)		2.5	4		2.5	4		MHz
R_i	Input Resistance			10^{12}			10^{12}		Ω
THD	Total Harmonic Distortion (f = 1kHz, A_V = 20dB, R_L = 2kΩ, C_L = 100pF, T_{amb} = 25°C, V_O = $2V_{PP}$)			0.01			0.01		%
e_n	Equivalent Input Noise Voltage (f = 1kHz, R_s = 100Ω)			15			15		$\frac{nV}{\sqrt{Hz}}$
∅m	Phase Margin			45			45		Degrees

* The input bias currents are junction leakage currents which approximately double for every 10°C increase in the junction temperature.


MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREQUENCY

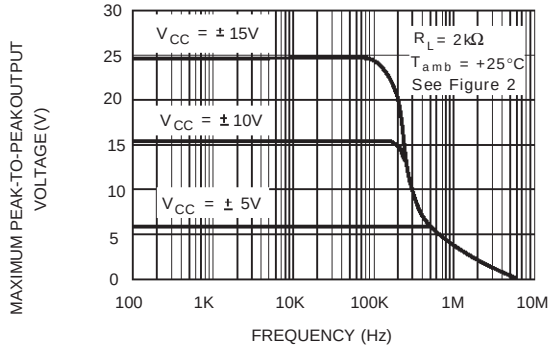


MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREQUENCY

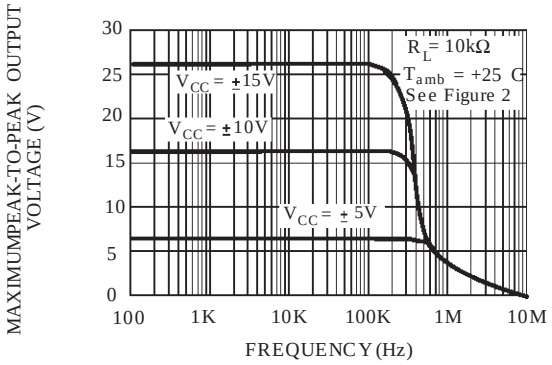


MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREQUENCY

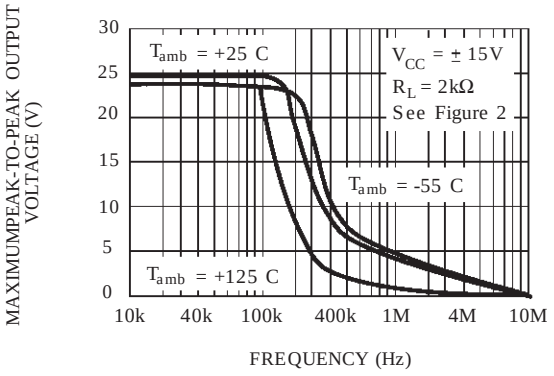


MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS FREE AIR TEMP.

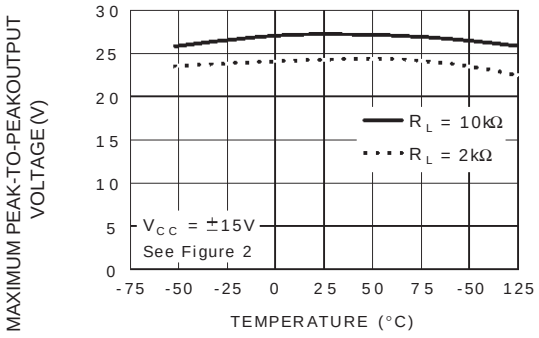


MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS LOAD RESISTANCE

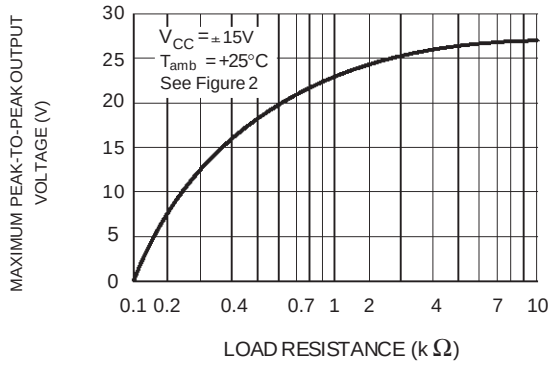


MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE VERSUS SUPPLY VOLTAGE

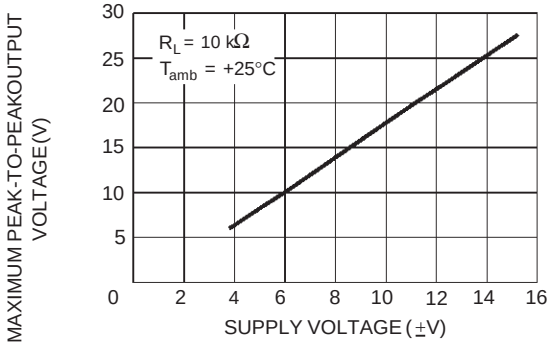


INPUT BIAS CURRENT VERSUS FREE AIR TEMPERATURE

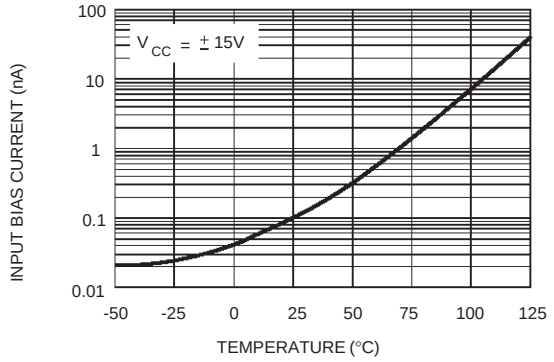


LARGE SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION VERSUS FREE AIR TEMPERATURE

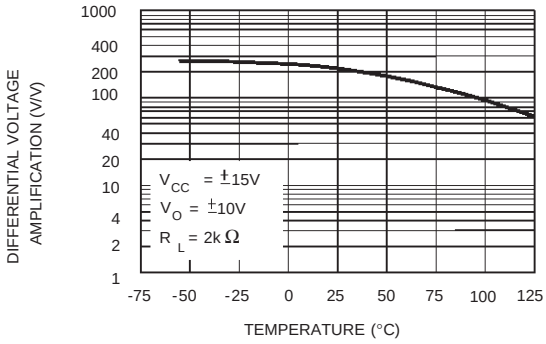


LARGE SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT VERSUS FREQUENCY

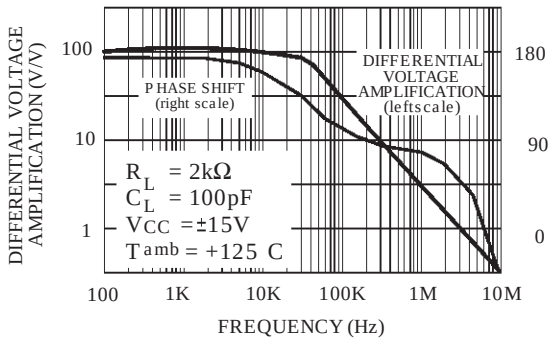


TOTAL POWER DISSIPATION VERSUS FREE AIR TEMPERATURE

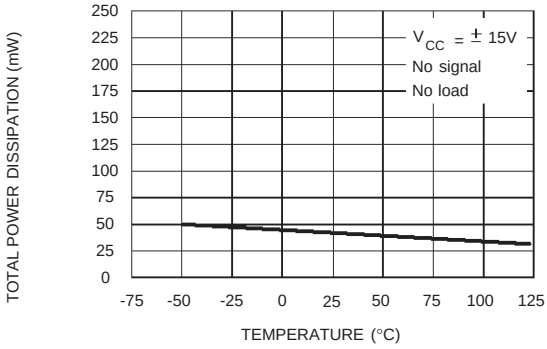


SUPPLY CURRENT PER AMPLIFIER VERSUS FREE AIR TEMPERATURE

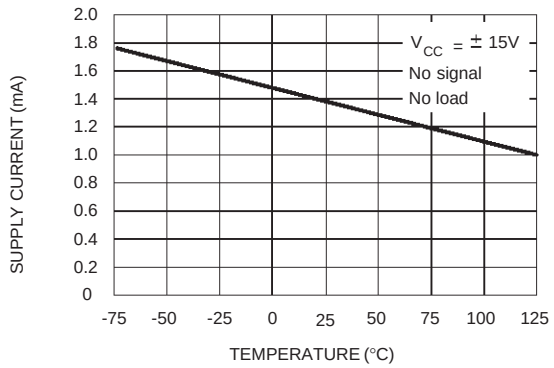


COMMON MODE REJECTION RATIO VERSUS FREE AIR TEMPERATURE

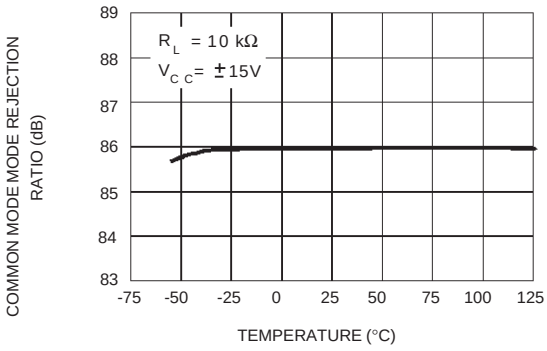


VOLTAGE FOLLOWER LARGE SIGNAL PULSE RESPONSE

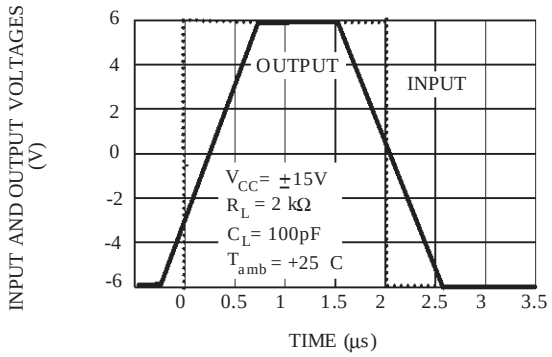


OUTPUT VOLTAGE VERSUS ELAPSED TIME

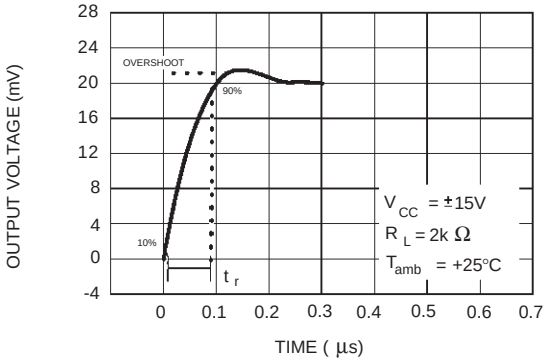

EQUIVALENT INPUT NOISE VOLTAGE VERSUS FREQUENCY

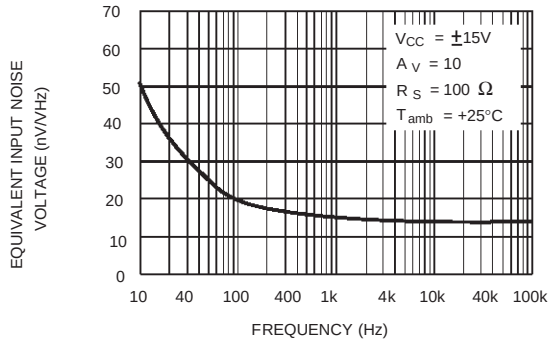

TOTAL HARMONIC DISTORTION VERSUS FREQUENCY

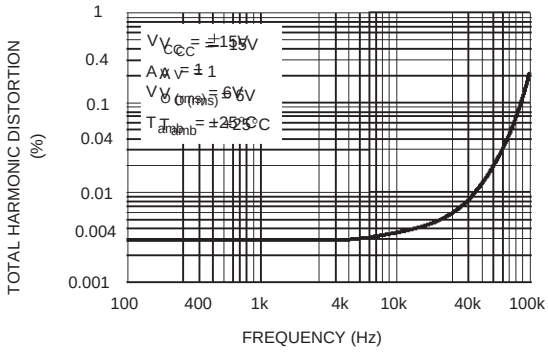

PARAMETER MEASUREMENT INFORMATION

Figure 1 : Voltage Follower



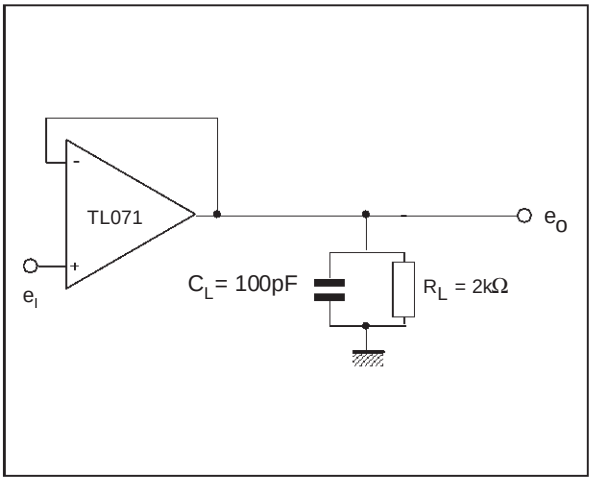


Figure 2 : Gain-of-10 Inverting Amplifier

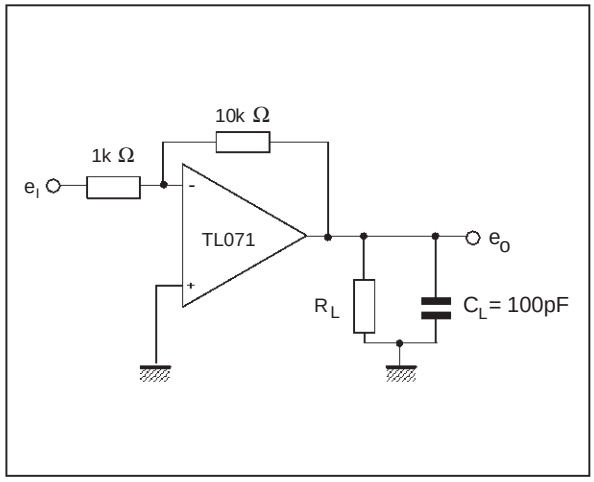


TYPICAL APPLICATIONS

(0.5Hz) SQUARE WAVE OSCILLATOR

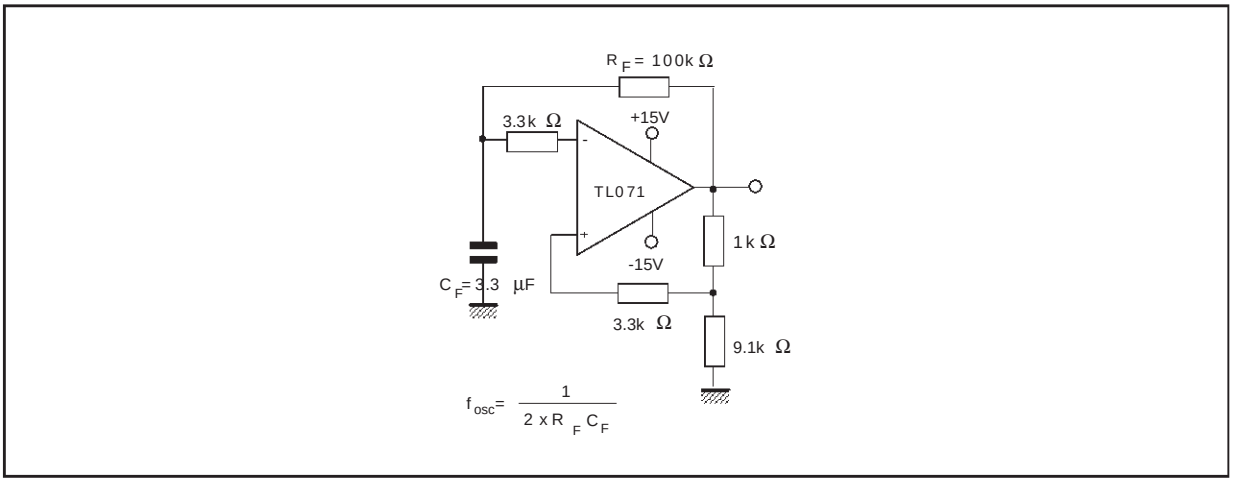


HIGH Q NOTCH FILTER

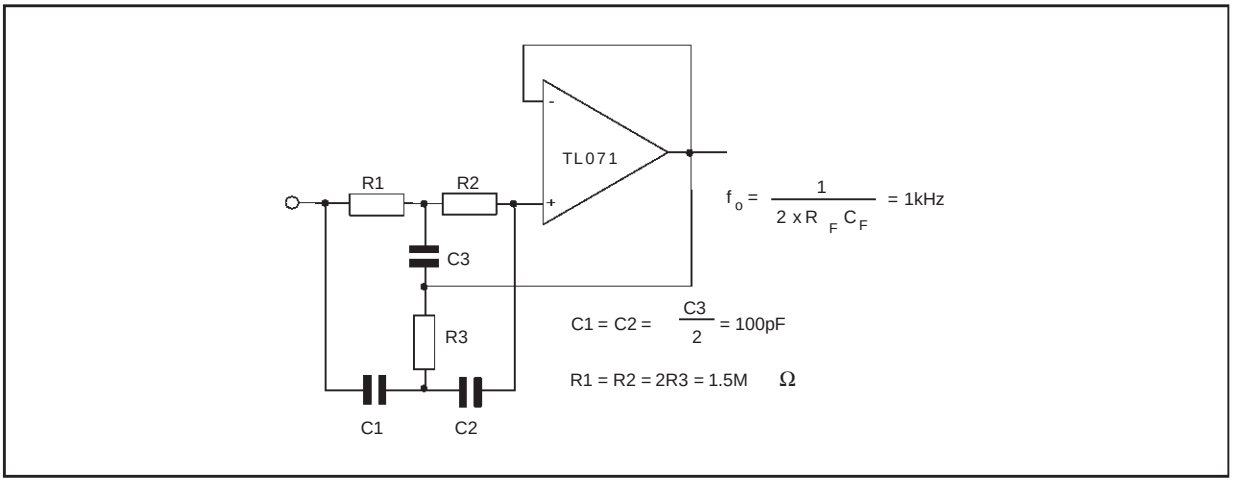

PACKAGE MECHANICAL DATA


8 PINS - PLASTIC DIP

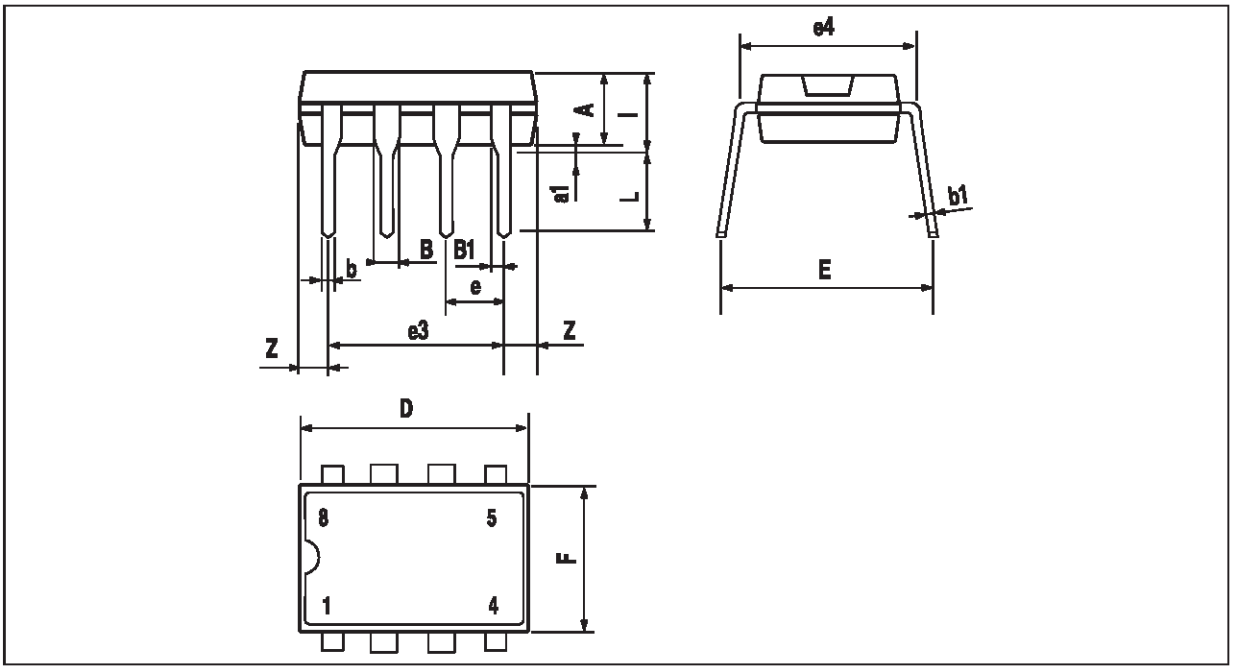

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		3.32			0.131	
a1	0.51			0.020		
B	1.15		1.65	0.045		0.065
b	0.356		0.55	0.014		0.022
b1	0.204		0.304	0.008		0.012
D			10.92			0.430
E	7.95		9.75	0.313		0.384
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			6.6			0260
i			5.08			0.200
L	3.18		3.81	0.125		0.150
Z			1.52			0.060

PACKAGE MECHANICAL DATA

8 PINS - PLASTIC MICROPACKAGE (SO)

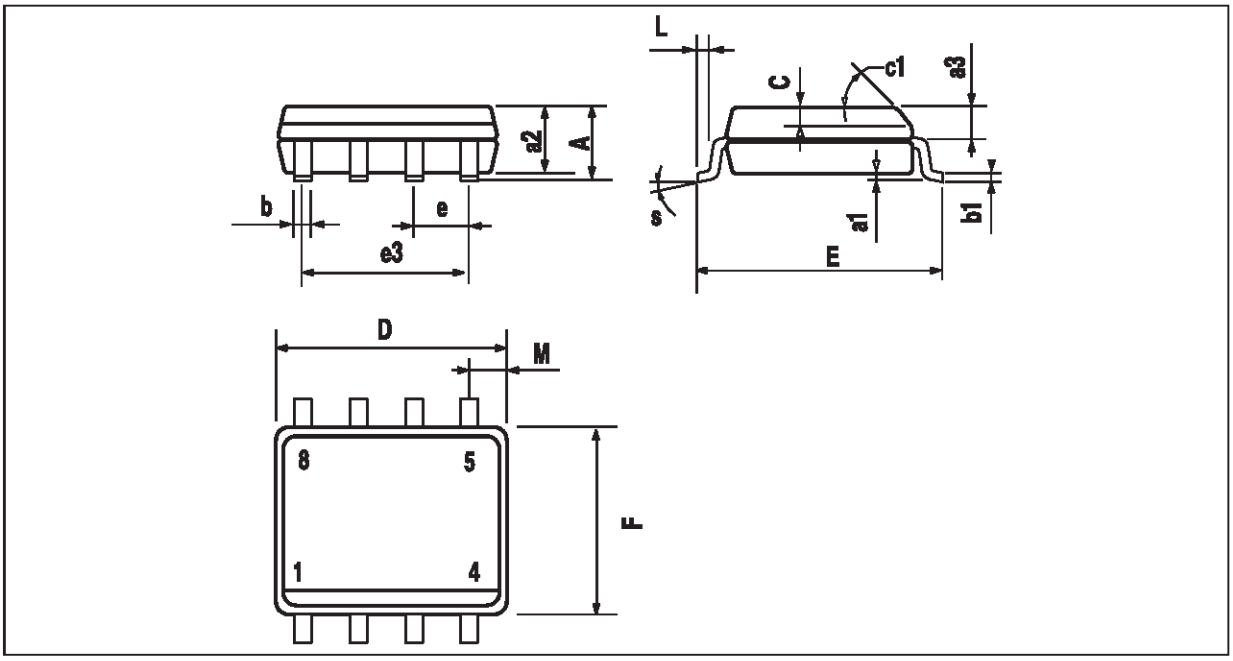

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
a3	0.65		0.85	0.026		0.033
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.020
c1	45^o (typ.)					
D	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.150		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8^o (max.)					

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a trademark of STMicroelectronics

© 1998 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

© http://www.st.com