
SIEMENS

1-A DC Motor Driver for Servo Driver Applications — TLE 4206

Overview

Features

- Optimized for headlight beam control applications
- Current-peak-blanking (no electrolytic capacitor at V_S)
- Delivers up to 0.8 A continuous
- Low saturation voltage; typ.1.2 V total @ 25 °C; 0.4 A
- Output protected against short circuit
- Overtemperature protection with hysteresis
- Over- and undervoltage lockout
- No crossover current
- Internal clamp diodes
- Enhanced power packages



P-DIP-16-5



P-DSO-14-4

Type	Ordering Code	Package
TLE 4206	Q67000-A9303	P-DIP-16-5
TLE 4206 G	Q67006-A9299	P-DSO-14-4

Description

The TLE 4206 is a fully protected H-Bridge Driver designed specifically for automotive headlight beam control and industrial servo control applications.
The part is built using the Siemens bipolar high voltage power technology DOPL.

The standard enhanced power P-DSO-14 package meets the application requirements and saves PCB-board space and costs. A P-DIP-16 package is also available.
The servo-loop-parameter pos.- and neg. Hysteresis, pos.- and neg. deadband and angle-amplification are programmable with external resitors.

An internal window-comparator controls the input line. In the case of a fault condition, like short circuit to GND, short circuit to supply-voltage, and broken wire, the TLE 4206 stops the motor immediately (brake condition).

The “programable current-peak-blanking” disables the servo-loop during the V_S voltage drop caused by the stall current spike. So there is no need of an electrolytic blocking capacitor at the V_S-terminal.

Furthermore the built in features like over- and undervoltage-lockout, short-circuit-protection and over-temperature-protection will open a wide range of automotive- and industrial applications.

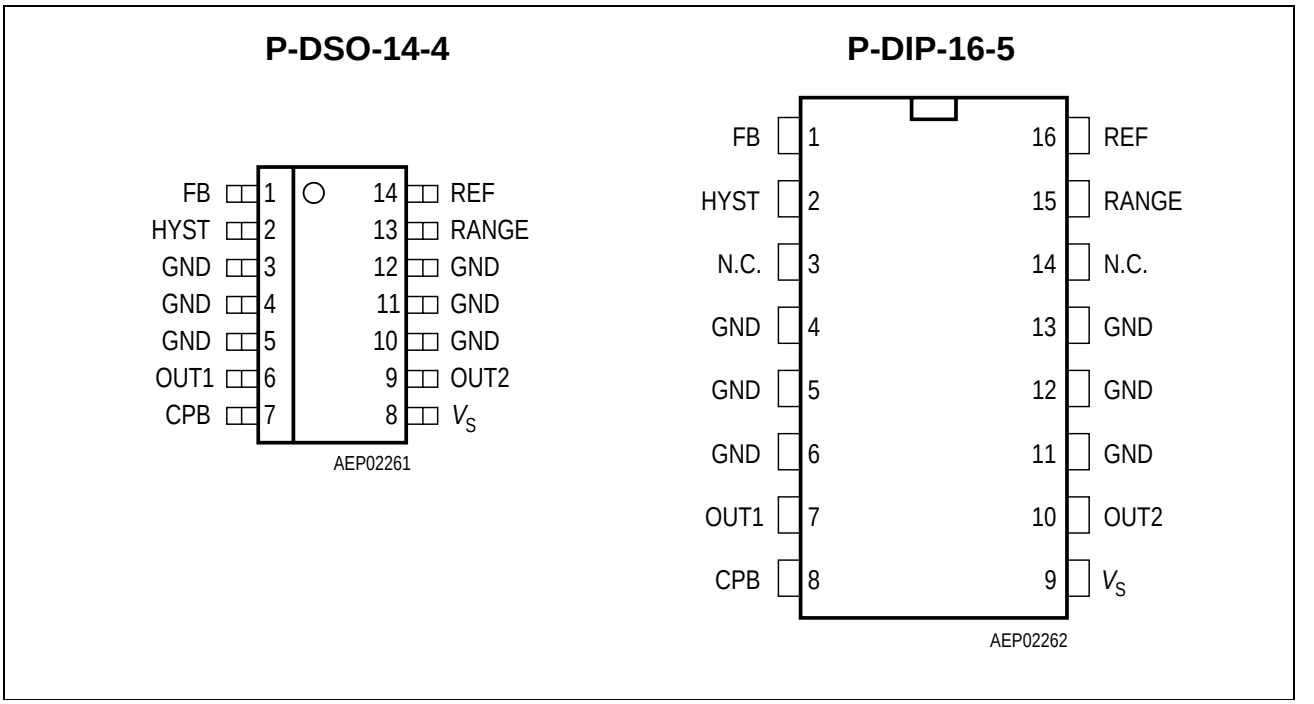


Figure 1 Pin Configuration (top view)

Pin Definitions and Functions

Pin No. P-DSO-14-4	Pin No. P-DIP-16-5	Symbol	Function
1	1	FB	Feedback Input
2	2	HYST	Hysteresis I/O
3, 4, 5, 10, 11, 12	**4, 5, 6, 11, 12, 13**	**GND**	**Ground**
6	**7**	**OUT1**	**Power Output 1**
7	**8**	CPB	Current Peak Blanking Input
8	**9**	V_S	**Power Supply Voltage**
9	**10**	**OUT2**	**Power Output 2**
13	15	RANGE	Range Input
14	16	REF	Reference Input
	3, 14	N.C.	Not connected

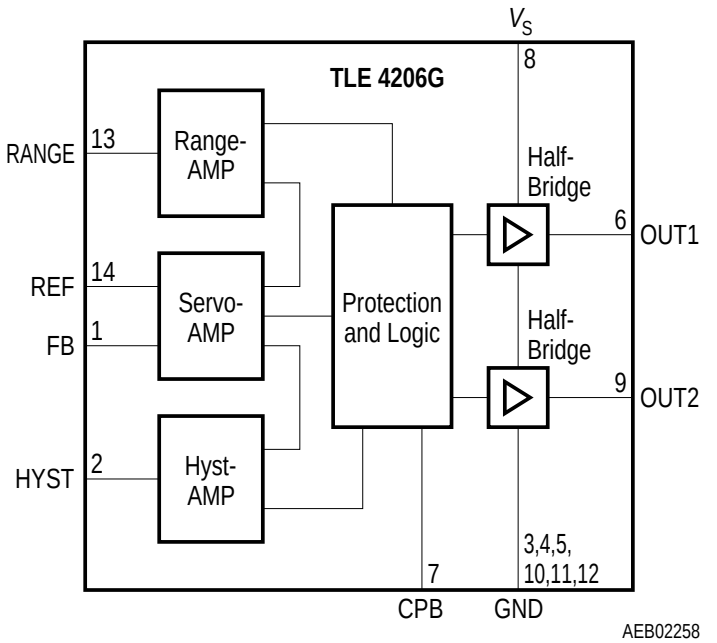


Figure 2 Block Diagram (Pin numbers are valid for TLE 4206 G in P-DSO-14-4)

Absolute Maximum Ratings

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		
Voltages					
Supply voltage	V_S	– 0.3	45	V	–
Supply voltage	V_S	– 1	–	V	t < 0.5 s; I_S > – 2 A
Logic input voltages (FB, REF, RANGE, HYST, CPB)	V_I	– 0.3	20	V	–
Currents					
Output current (OUT1, OUT2)	I_{OUT}	–	–	A	internally limited
Output current (Diode)	I_{OUT}	– 1	1	A	–
Input current (FB, REF, RANGE, HYST)	I_{IN}	– 2 – 6	2 6	mA mA	 t < 2 ms; t/T < 0.1
Temperatures					
Junction temperature	T_j	– 40	150	°C	–
Storage temperature	T_{stg}	– 50	150	°C	–
Thermal Resistances					
Junction pin (P-DSO-14-4)	$R_{thj\text{-}pin}$	–	25	K/W	measured to pin 5
Junction ambient (P-DSO-14-4)	R_{thjA}	–	65	K/W	–
Junction pin (P-DSO-16-5)	$R_{thj\text{-}pin}$	–	15	K/W	measured to pin 5
Junction ambient (P-DSO-16-5)	R_{thjA}	–	60	K/W	–

Note: Maximum ratings are absolute ratings; exceeding any one of these values may cause irreversible damage to the integrated circuit.

Operating Range

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		
Supply voltage	V_S	8	18	V	After V_S rising above $V_{UV\ ON}$
Supply voltage increasing	V_S	– 0.3	$V_{UV\ ON}$	V	Outputs in tristate
Supply voltage decreasing	V_S	– 0.3	$V_{UV\ OFF}$	V	Outputs in tristate
Output current	$I_{OUT1\text{-}2}$	– 0.8	0.8	A	–
Input current (FB, REF)	I_{IN}	– 50	500	µA	–
Junction temperature	T_j	– 40	150	°C	–

Electrical Characteristics

8 V < V_S < 18 V; I_{OUT1-2} = 0 A; – 40 °C < T_j < 150 °C
(unless otherwise specified)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Current Consumption						
Supply current	I_S	–	12	20	mA	–
Supply current	I_S	–	20	30	mA	I_{OUT1} = 0.4 A I_{OUT2} = – 0.4 A
Supply current	I_S	–	30	50	mA	I_{OUT1} = 0.8 A I_{OUT2} = – 0.8 A
Over- and Under Voltage Lockout						
UV Switch ON voltage	$V_{UV\ ON}$	–	7.4	8	V	V_S increasing
UV Switch OFF voltage	$V_{UV\ OFF}$	6	6.9	–	V	V_S decreasing
UV ON/OFF Hysteresis	V_{UVHY}	–	0.5	–	V	$V_{UV\ ON} - V_{UV\ OFF}$
OV Switch OFF voltage	$V_{OV\ OFF}$	–	20.5	23	V	V_S increasing
OV Switch ON voltage	$V_{OV\ ON}$	17.5	20	–	V	V_S decreasing
OV ON/OFF Hysteresis	V_{OVHY}	–	0.5	–	V	$V_{OV\ OFF} - V_{OV\ ON}$

Electrical Characteristics (cont'd)
8 V < V_S < 18 V; I_{OUT1-2} = 0 A; – 40 °C < T_j < 150 °C
(unless otherwise specified)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Outputs OUT1-2						
Saturation Voltages						
Source (upper) I_{OUT} = – 0.2 A	$V_{SAT\,U}$	–	0.85	1.15	V	T_j = 25 °C
Source (upper) I_{OUT} = – 0.4 A	$V_{SAT\,U}$	–	0.90	1.20	V	T_j = 25 °C
Sink (upper) I_{OUT} = – 0.8 A	$V_{SAT\,U}$	–	1.10	1.50	V	T_j = 25 °C
Sink (lower) I_{OUT} = 0.2 A	$V_{SAT\,L}$	–	0.15	0.23	V	T_j = 25 °C
Sink (lower) I_{OUT} = 0.4 A	$V_{SAT\,L}$	–	0.25	0.40	V	T_j = 25 °C
Sink (lower) I_{OUT} = 0.8 A	$V_{SAT\,L}$	–	0.45	0.75	V	T_j = 25 °C
Total drop I_{OUT} = 0.2 A	V_{SAT}	–	1.0	1.4	V	$V_{SAT} = V_{SAT\,U} + V_{SAT\,L}$
Total drop I_{OUT} = 0.4 A	V_{SAT}	–	1.2	1.7	V	$V_{SAT} = V_{SAT\,U} + V_{SAT\,L}$
Total drop I_{OUT} = 0.8 A	V_{SAT}	–	1.6	2.5	V	$V_{SAT} = V_{SAT\,U} + V_{SAT\,L}$
Clamp Diodes						
Forward voltage; upper	V_{FU}	–	1	1.5	V	I_F = 0.4 A
Upper leakage current	I_{LKU}	–	–	5	mA	I_F = 0.4 A
Forward voltage; lower	V_{FL}	–	0.9	1.4	V	I_F = 0.4 A

Electrical Characteristics (cont'd)
8 V < V_S < 18 V; I_{OUT1-2} = 0 A; – 40 °C < T_j < 150 °C
(unless otherwise specified)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Input-Interface						
Input REF						
Quiescent voltage	V_{REFq}	–	200	–	mV	I_{REF} = 0 µA
Input resistance	R_{REF}	–	6	–	kΩ	0 V < V_{REF} < 0.5 V
Input FB						
Quiescent voltage	V_{FBq}	–	200	–	mV	I_{FB} = 0 µA
Input resistance	R_{FB}	–	6	–	kΩ	0 V < V_{FB} < 0.5 V
Input/Output HYST						
Current Amplification $A_{HYST} = I_{HYST} / (I_{REF} - I_{FB})$	A_{HYST}	0.8	0.95	1.1	–	– 20 µA < I_{HYST} < – 10 µA; 10 µA < I_{HYST} < 20 µA; I_{REF} = 250 µA $V_{HYST} = V_S / 2$
Current Offset	I_{HYSTIO}	– 2	0.5	3	µA	$I_{REF} = I_{FB}$ = 250 µA $V_{HYST} = V_S / 2$
Threshold voltage High	V_{HYH} / V_S	–	52	–	%	–
Deadband voltage High	V_{DBH} / V_S	–	50.4	–	%	–
Deadband voltage Low	V_{DBL} / V_S	–	49.6	–	%	–
Threshold voltage Low	V_{HYL} / V_S	–	48	–	%	–
Hysteresis Window	V_{HYW} / V_S	3	4	5	%	$(V_{HYH} - V_{HYL}) / V_S$
Deadband Window	V_{DBW} / V_S	0.4	0.8	1.2	%	$(V_{DBH} - V_{DBL}) / V_S$

Electrical Characteristics (cont'd)
8 V < V_S < 18 V; I_{OUT1-2} = 0 A; – 40 °C < T_j < 150 °C
(unless otherwise specified)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Input RANGE						
Input current	I_{RANGE}	– 1	–	1	µA	0 V < V_{RANGE} < V_S
Switch-OFF voltage High	V_{OFFH}	– 100	0	100	mV	refer to V_S
Switch-OFF voltage Low	V_{OFFL}	300	400	500	mV	refer to GND
Input CPB (Current Peak Blanking)						
Charge current	I_{CPBCH}	–	6.5	–	µA	V_{HYL} > V_{HYST}; V_{CPB} = 0 V
Low voltage	V_{CPBL}	–	20	100	mV	V_{HYL} < V_{HYST} < V_{HYH}
High voltage threshold	V_{CPBH}	5	5.7	6.5	V	V_{HYL} > V_{HYST}
Clamp voltage	V_{CPBC}	–	6.2	–	V	V_{HYL} > V_{HYST}
Blanking time	t_{CPB}	–	40	–	ms	C_{CPB} = 47 nF
Thermal Shutdown						
Thermal shutdown junction temperature	T_{jSD}	150	175	200	°C	–
Thermal switch-on junction temperature	T_{jSO}	120	–	170	°C	–
Temperature hysteresis	ΔT	–	30	–	K	–

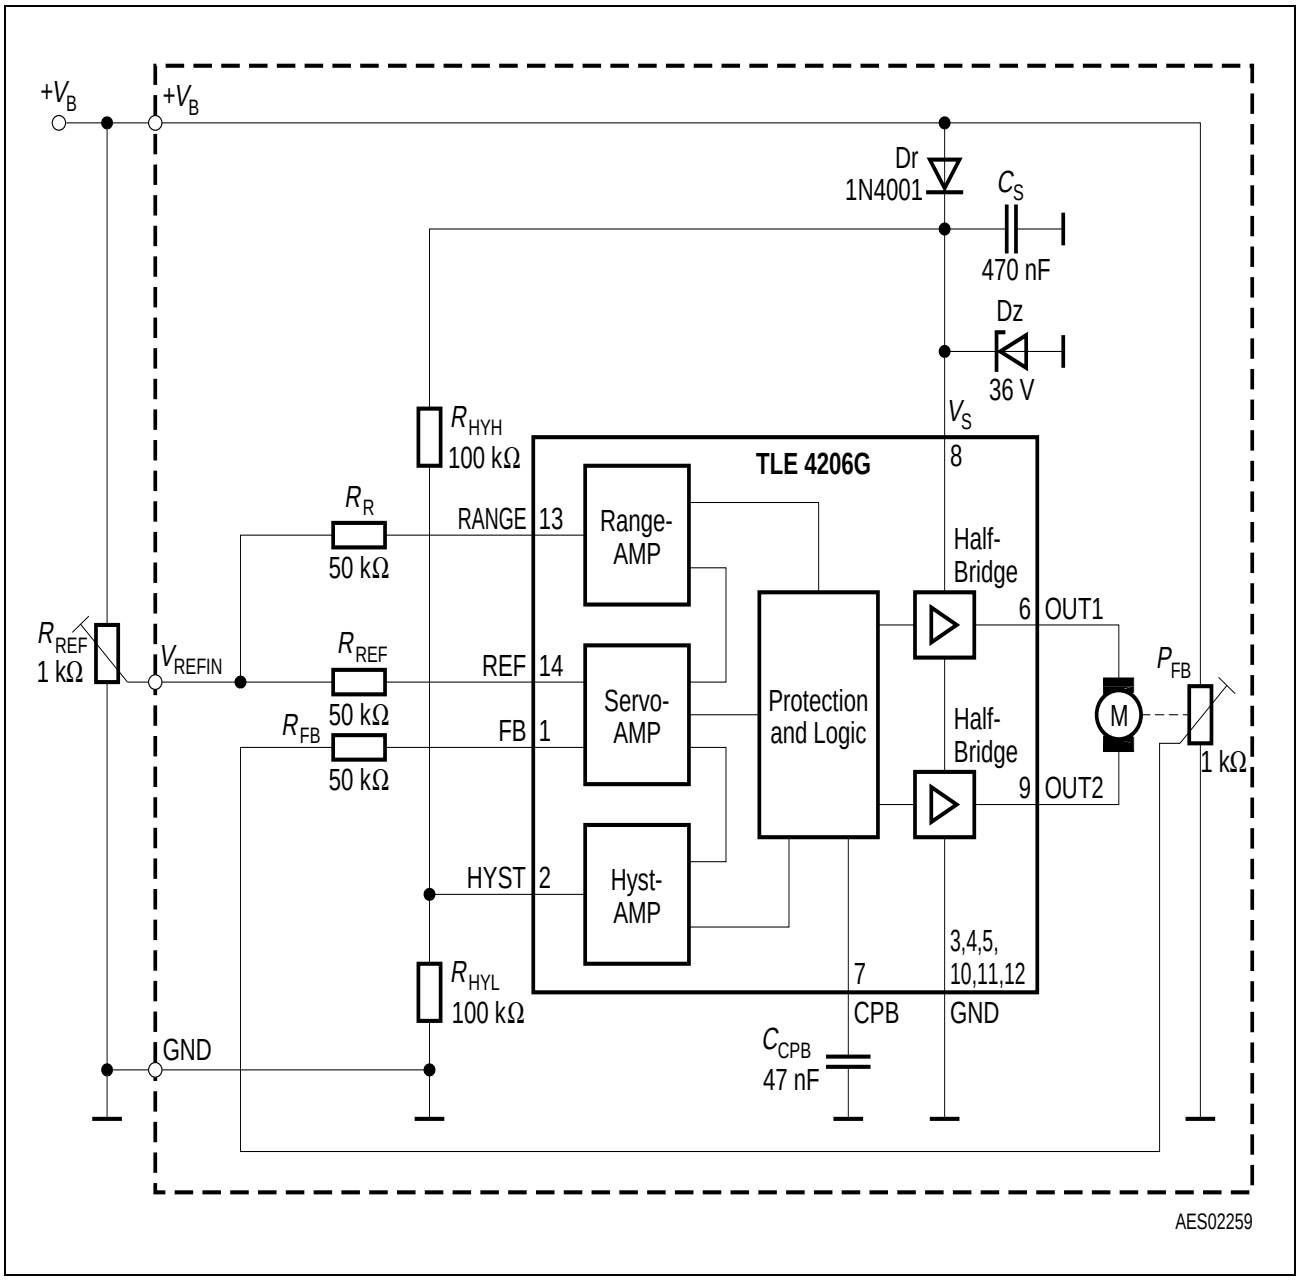


Figure 3 Application Circuit (Pin numbers are valid for TLE 4206G in P-DSO-14-4)

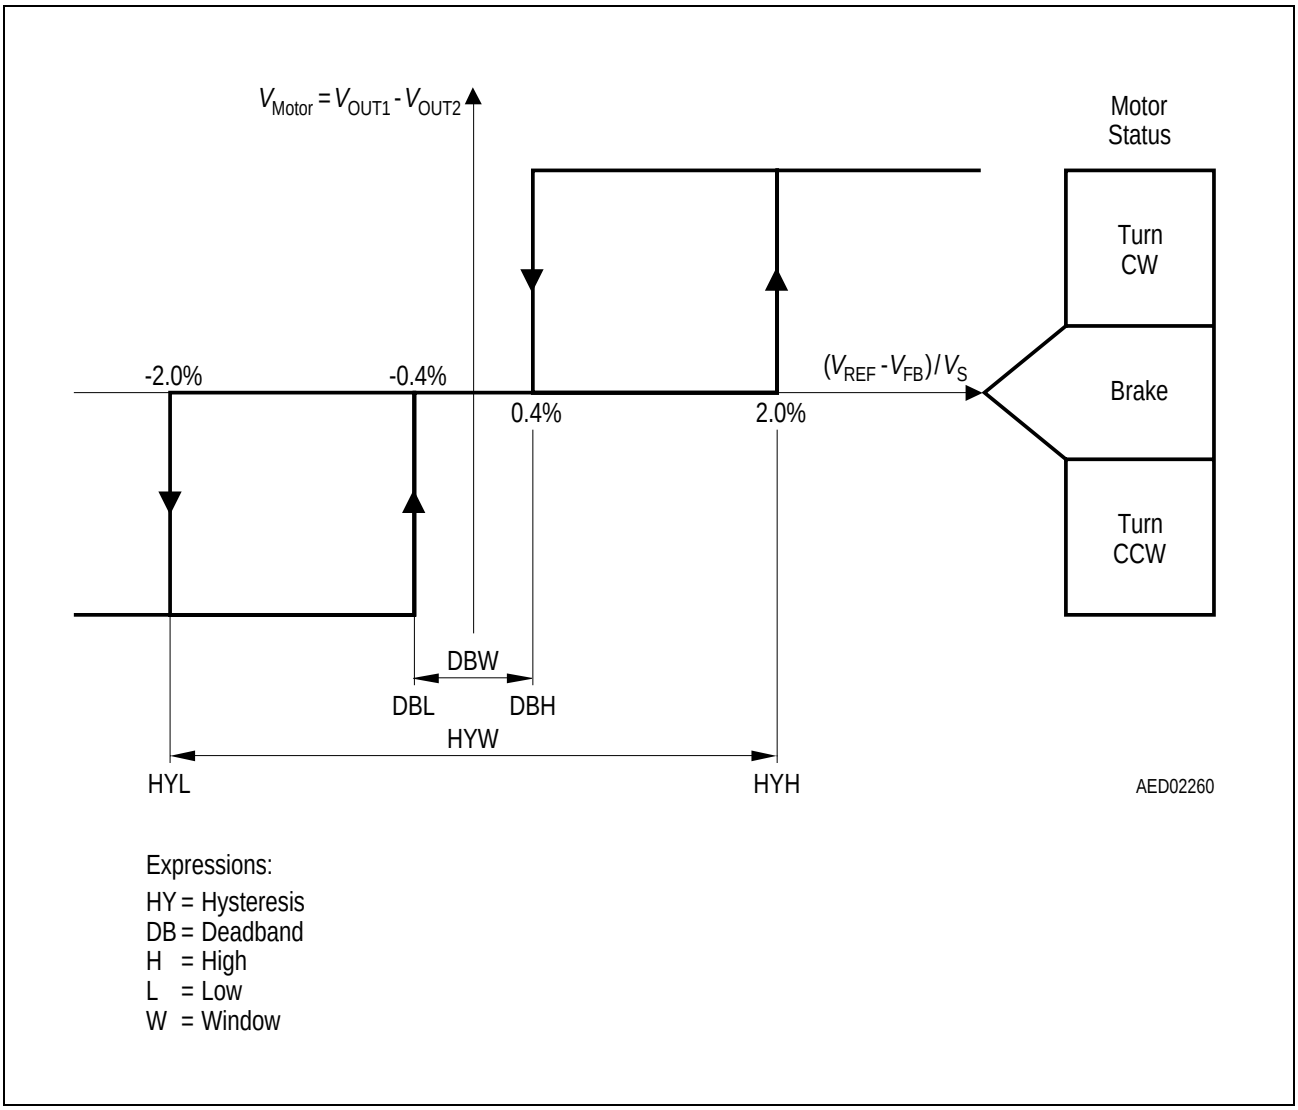


Figure 4 Hysteresis, Phaselag and Deadband-Definitions


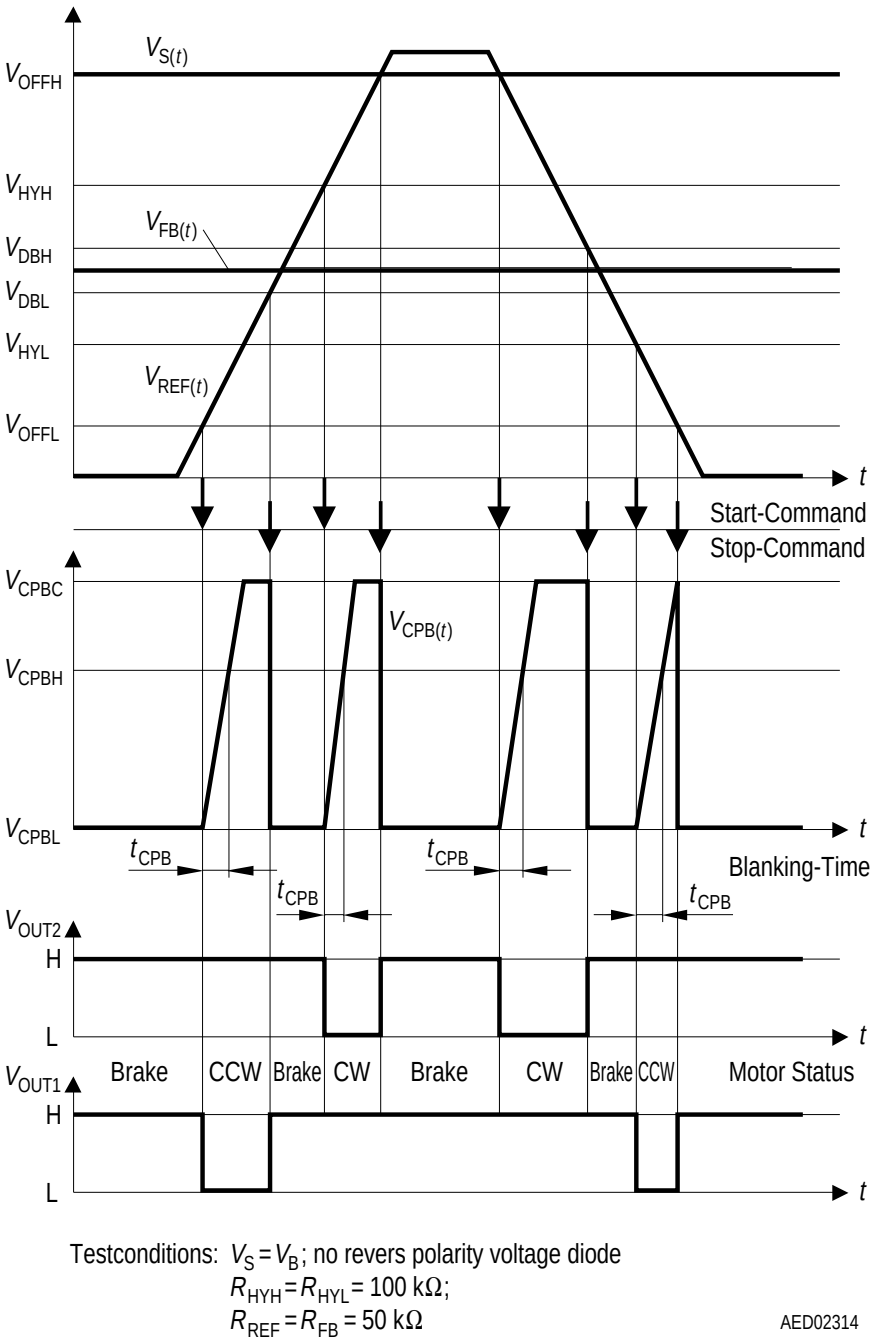


Figure 5 Timing and Phaselag

Package Outlines

P-DSO-14-4
(Plastic Dual Small Outline Package)

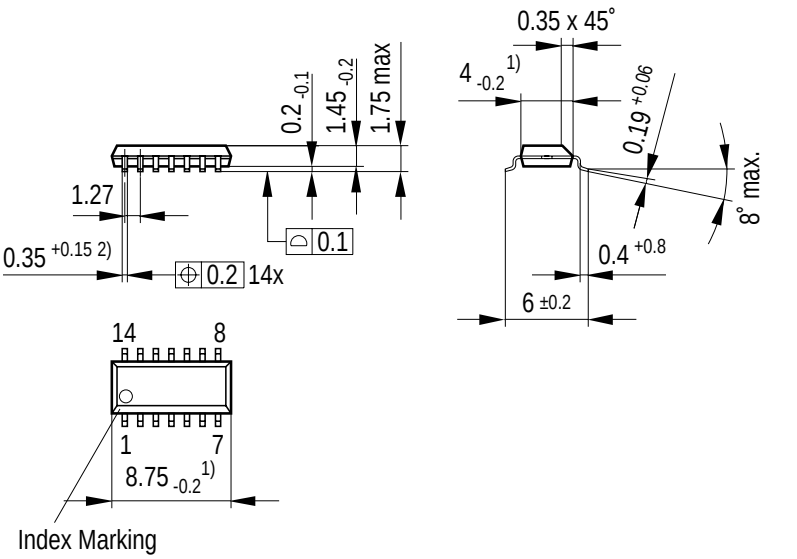


1) Does not include plastic or metal protrusion of 0.15 max. per side
2) Does not include dambar protrusion of 0.05 max. per side

GPS05093

Sorts of Packing
Package outlines for tubes, trays etc. are contained in our Data Book “Package Information”.
SMD = Surface Mounted Device

Dimensions in mm

P-DIP-16-5
(Plastic Dual In-line Package)

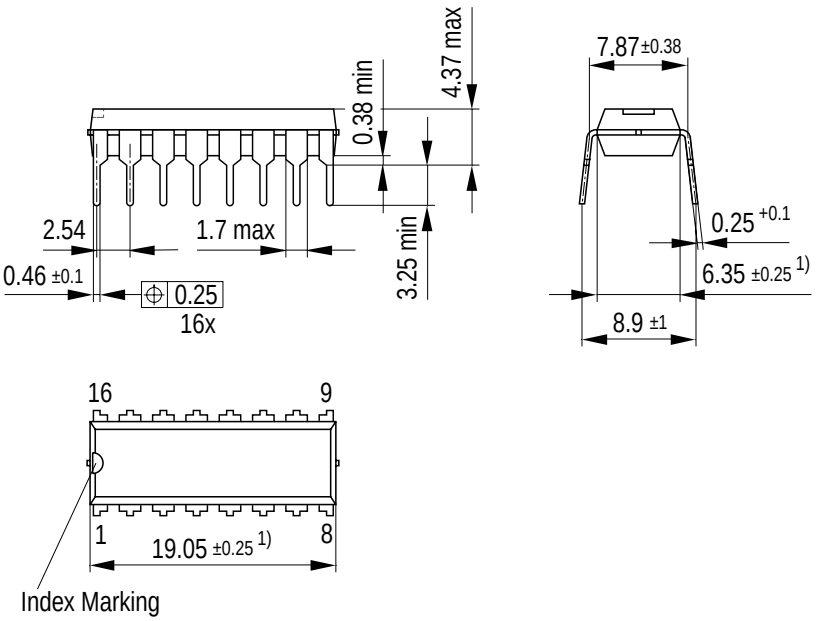

1) Does not include plastic or metal protrusion of 0.25max per side

GPD05585

Sorts of Packing
Package outlines for tubes, trays etc. are contained in our Data Book “Package Information”.

Dimensions in mm