


3.8x6 mm SMT Tactile Switch

TP25 Series




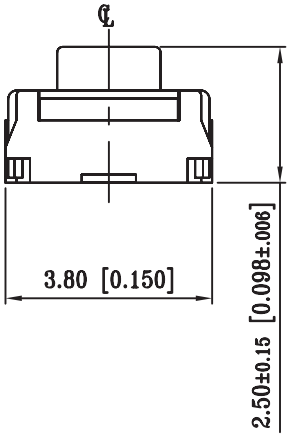

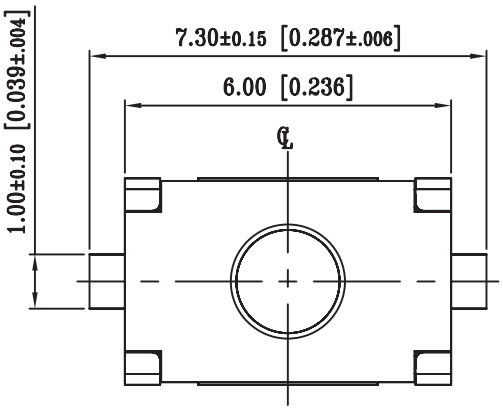

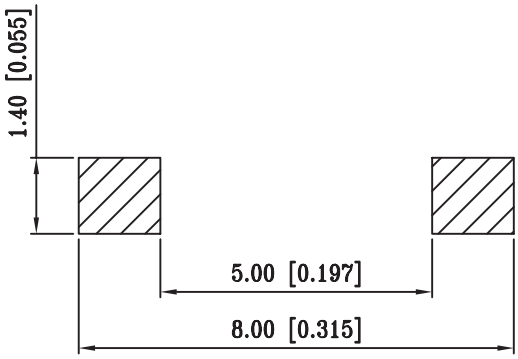

P.C.B. LAYOUT
(VIEW FROM THE DIRECTION A)

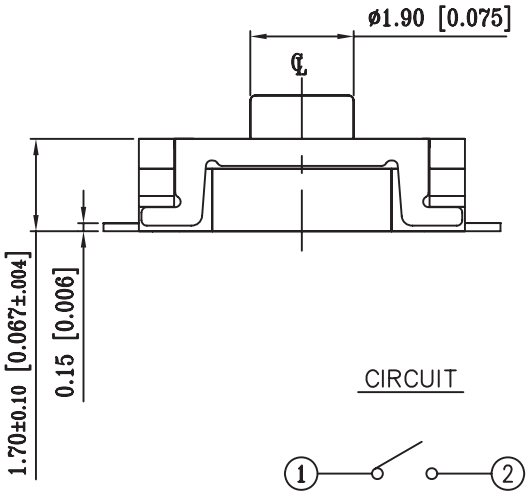

NOTE:
1.ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2.GENERAL TOLERANCES ±0.2mm
3.MECHANICAL:

Type	Operation Force	Operation Life	Travel	Contact Material
TP25KAGTR	200gf	200,000	0.30±0.15	Silver
TP25CAGTR	300gf	200,000	0.35±0.15	Silver
TP25JAGTR	400gf	100,000	0.45±0.15	Silver
TP25KAUTR	200gf	200,000	0.30±0.15	Gold
TP25CAUTR	300gf	200,000	0.35±0.15	Gold
TP25JAUTR	400gf	100,000	0.45±0.15	Gold

4.ELECTRIAL:
Switch Rating: 50 mA 12 V
Contact Resistance: 100 mΩ MAX
Insulation Resistance: DC 100V 100 MΩMIN

How to order:

TP25 [1] [2] [3]

[1] OPERATING FORCE:
K 200gf
C 300gf
J 400gf

[2] DOME PLATING MATERIAL:
AG Silver
AU Gold

[3] PACKAGE STYLE:
TR Tape & Reel

