

TPIUU60 SERIES

63W U Bracket Type
Industrial Power Supplies

Features:

- Wide Operating Voltage 81 to 280 VAC, 47 to 400 Hz or 90 to 420VDC
- Internal EMI filter
- Single to Quad Output
- Power Fail Detect (Optional)
- Operating temperature -20~70°C
- Class I
- 3 year warranty



Electrical Characteristics:

Vin	Universal Input Voltage	90~264VAC 106~250VDC
	Operating Voltage	81~280VAC 90~420VDC
fin	Input Frequency	47~63Hz
Po	Output Power Range	See rating chart
Vo	Output Voltage Range	See rating chart
Io	Output Current Range	See rating chart
Iil	Input Current (Low Line)	Io=Full load, Vin=100VAC or 160VDC 1.6A
Iih	Input Current (High Line)	Io=Full load, Vin=240VAC or 325VDC 0.8A
Ir	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC or 160VDC 35A (max.)
	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC or 325VDC 70A (max.)
Eff	Efficiency	Io=Full load, Vin=230VAC or 325VDC 70~88%
REG-i	Line Regulation	Io=Full Load 0.5~1%
REG-o	Load Regulation	Vin=230VAC or 325VDC 5~6%
OVP	Over Voltage Protection	112~132%
OCP	Over Current Protection	110~150%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC or 140VDC 5mS (max.)
Th	Hold-Up Time	Io=Full Load, Vin=110VAC or 160VDC 16mS (min.)
Ts	Start Up Time	Io=Full Load, Vin=100VAC or 140VDC 2S (max.)
Vp-p	Ripple & Noise(Peak to Peak)	Full Load, Vin=85VAC or 100VDC 1% (max.)
Ilk	Safety Ground Leakage Current	Vin=240VAC/60Hz 0.45mA (max.)
TC	Temperature Coefficient	All output ±0.05%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC See rating chart
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary 4242VDC (min.)
Vpg	Dielectric Withstanding Voltage for Primary to PE	Primary to PE 2414VDC (min.)
Ris	Isolation Resistance	Test Voltage=500VDC 50MΩ (min.)

Note: The Ripple & Noise which is under 3.3VDC at 2% max

Environmental

To	Operating Temperature	See derating curve
Ts	Storage Temperature	-40~85°C
Ho	Operating Humidity	0~95%
Hr	Storage Humidity	0~95%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	0.1M Hrs (min.)
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C	

Application:

- Monitor
- Industrial PC
- Set-top box
- AV equipment
- CCD recorder

Safety Approvals:



UL/c-UL(UL 60950-1:2nd Edition)
TUV/GS(EN 60950-1:2nd Edition)



TPIUU60 SERIES

63W U Bracket Type
Industrial Power Supplies


Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation	Max. Output Power	Pno (max.)
TPIUU60-101	3 ~ 5 VDC	16.66 ~ 10.0 A	5%	50W	2W
TPIUU60-102	5 ~ 6 VDC	11.00 ~ 9.16 A	5%	55W	2W
TPIUU60-103	6 ~ 8 VDC	10.00 ~ 7.50 A	5%	60W	2W
TPIUU60-104	8 ~ 11 VDC	7.87 ~ 5.72 A	3%	63W	2W
TPIUU60-105	11 ~ 13 VDC	5.72 ~ 4.84 A	3%	63W	2W
TPIUU60-105-1	11 ~ 13 VDC	4.09 ~ 3.46 A	3%	45W	2W
TPIUU60-106	13 ~ 16 VDC	4.84 ~ 3.93 A	3%	63W	2W
TPIUU60-107	16 ~ 21 VDC	3.93 ~ 3.00 A	3%	63W	2W
TPIUU60-108	21 ~ 27 VDC	3.00 ~ 2.33 A	2%	63W	2W
TPIUU60-109	27 ~ 33 VDC	2.33 ~ 1.90 A	2%	63W	2W
TPIUU60-110	33 ~ 40 VDC	1.90 ~ 1.57 A	2%	63W	2W
TPIUU60-111	40 ~ 48 VDC	1.57 ~ 1.31 A	2%	63W	2W

Output Voltage And Current Rating Chart (Multi Output) :

Model Number	Output #1				Output #2				Output #3				Output #4				Max. Output Power	Pno (max.)
	Vonorm	Iomin	Iomax	Regmax	Vonorm	Iomin	Iomax	Regmax	Vonorm	Iomin	Iomax	Regmax	Vonorm	Iomin	Iomax	Regmax		
TPIUU60-200	+3.3V	1.4A	7A	6%	+12V	0.6A	3A	5%									59.1W	2W
TPIUU60-201	+5V	0.7A	7A	5%	+12V	0.3A	3A	5%									63W	2W
TPIUU60-202	+5V	0.7A	7A	5%	+15V	0.3A	3A	5%									63W	2W
TPIUU60-203	+5V	0.7A	7A	5%	+24V	0.4A	2A	5%									63W	2W
TPIUU60-204	+3.3V	1.4A	7A	6%	+5V	0.5A	5A	5%									48.1W	2W
TPIUU60-215	+5V	1.4A	7A	5%					-24V	0.2A	2A	5%					63W	2W
TPIUU60-300	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W	2W
TPIUU60-300-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W	2W
TPIUU60-301	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-5V	0A	0.8A	5%					63W	2W
TPIUU60-301-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+5V	0A	0.8A	5%					63W	2W
TPIUU60-302	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W	2W
TPIUU60-302-1	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W	2W
TPIUU60-303	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%					63W	2W
TPIUU60-303-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%					63W	2W
TPIUU60-305	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	-12V	0A	0.8A	5%					63W	2W
TPIUU60-305-1	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	+12V	0A	0.8A	5%					63W	2W
TPIUU60-306	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-5V	0A	0.8A	5%					59.8W	2W
TPIUU60-306-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+5V	0A	0.8A	5%					59.8W	2W
TPIUU60-308	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	-12V	0A	1A	5%					53.5W	2W
TPIUU60-308-1	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	+12V	0A	1A	5%					53.5W	2W
TPIUU60-400	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU60-400-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU60-400-2	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU60-400-3	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU60-401	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU60-401-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU60-401-2	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU60-401-3	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU60-402	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W	2W
TPIUU60-402-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W	2W
TPIUU60-402-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W	2W
TPIUU60-402-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W	2W
TPIUU60-403	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W	2W
TPIUU60-403-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W	2W
TPIUU60-403-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W	2W
TPIUU60-403-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W	2W
TPIUU60-404	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU60-404-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU60-404-2	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU60-404-3	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W

Mechanical Specifications :

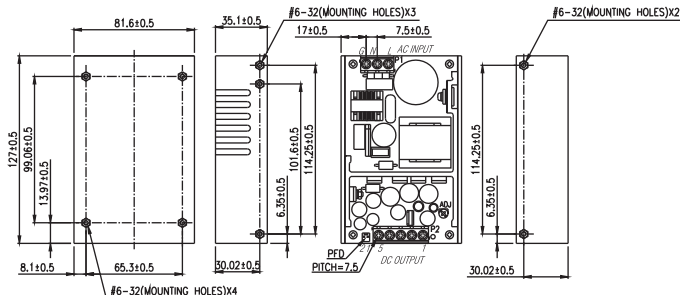

- Note:
- Dimensions are shown in inches or mm.
 - Weight: 425gs approx.
 - Input connector mates with screw terminal (DINKLE#ESK750V-03P)(10-24AWG).
 - Output connector mates with screw terminal (DINKLE#ESK750V-05P)(10-24AWG).

PIN CHART


MODEL	1	2	3	4	5
TPIUU60-1XX	OUT	OUT	RTN	RTN	RTN
TPIUU60-2XX	Vo2	Vo1	COM	N/C	N/C
TPIUU60-215	N/C	Vo1	COM	Vo3	N/C
TPIUU60-3XX	Vo2	Vo1	COM	Vo3	N/C
TPIUU60-4XX	Vo2	Vo1	COM	Vo3	Vo4

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3 Vo4:Output#4

PFD (Optional)

Other connector	1	2
OUT	RTN	
OUT	RTN	
OUT	RTN	
OUT	RTN	

Derating Curve :

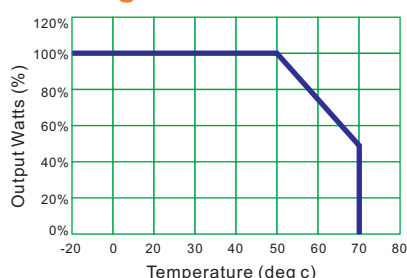

- Operating Temperature: -20 to 70°C
- Derate linearly from 100% load at 50°C to 50% load at 70°C

