

TPIUU61 SERIES

**63W U Bracket Type
Industrial Power Supplies**

Features:

- Wide Operating Voltage 81 to 280 VAC, 47 to 400 Hz or 90 to 420VDC
- Internal EMI filter
- Single to Quad Output
- Power Fail Detect (Optional)
- Operating temperature -20~70°C
- Class I
- 3 year warranty



Electrical Characteristics:

Vin	Universal Input Voltage	90~264VAC 106~250VDC	
	Operating Voltage	81~280VAC 90~420VDC	
fin	Input Frequency	47~63Hz	
Po	Output Power Range	See rating chart	
Vo	Output Voltage Range	See rating chart	
Io	Output Current Range	See rating chart	
Iil	Input Current (Low Line)	Io=Full load, Vin=100VAC or 160VDC	1.6A
Iih	Input Current (High Line)	Io=Full load, Vin=240VAC or 325VDC	0.8A
Ir	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC or 160VDC	35A (max.)
	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC or 325VDC	70A (max.)
Eff	Efficiency	Io=Full load, Vin=230VAC or 325VDC	70~88%
REG-i	Line Regulation	Io=Full Load	0.5~1%
REG-o	Load Regulation	Vin=230VAC or 325VDC	5~6%
OVP	Over Voltage Protection	112~132%	
OCP	Over Current Protection	110~150%	
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC or 140VDC	5mS (max.)
Th	Hold-Up Time	Io=Full Load, Vin=110VAC or 160VDC	16mS (min.)
Ts	Start Up Time	Io=Full Load, Vin=100VAC or 140VDC	2S (max.)
Vp-p	Ripple & Noise(Peak to Peak)	Full Load, Vin=85VAC or 100VDC	1% (max.)
Ilk	Safety Ground Leakage Current	Vin=240VAC/60Hz	0.45mA (max.)
TC	Temperature Coefficient	All output	±0.05%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC	See rating chart
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242VDC (min.)
Vpg	Dielectric Withstanding Voltage for Primary to PE	Primary to PE	2414VDC (min.)
Ris	Isolation Resistance	Test Voltage=500VDC	50MΩ (min.)

Note: The Ripple & Noise which is under 3.3VDC at 2% max

Environmental

To	Operating Temperature	See derating curve
Ts	Storage Temperature	-40~85°C
Ho	Operating Humidity	0~95%
Hr	Storage Humidity	0~95%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	0.1M Hrs (min.)
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C	

Application:

- Monitor
- Industrial PC
- Set-top box
- AV equipment
- CCD recorder

Safety Approvals:

cULus CBCE



UL/c-UL(UL 60950-1:2nd Edition)
TUV/GS(EN 60950-1:2nd Edition)



TPIUU61 SERIES

63W U Bracket Type
Industrial Power Supplies


Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation	Max. Output Power	Pno (max.)
TPIUU61-101	3 ~ 5 VDC	16.66 ~ 10.0 A	5%	50W	2W
TPIUU61-102	5 ~ 6 VDC	11.00 ~ 9.16 A	5%	55W	2W
TPIUU61-103	6 ~ 8 VDC	10.00 ~ 7.50 A	5%	60W	2W
TPIUU61-104	8 ~ 11 VDC	7.87 ~ 5.72 A	3%	63W	2W
TPIUU61-105	11 ~ 13 VDC	5.72 ~ 4.84 A	3%	63W	2W
TPIUU61-105-1	11 ~ 13 VDC	4.09 ~ 3.46 A	3%	45W	2W
TPIUU61-106	13 ~ 16 VDC	4.84 ~ 3.93 A	3%	63W	2W
TPIUU61-107	16 ~ 21 VDC	3.93 ~ 3.00 A	3%	63W	2W
TPIUU61-108	21 ~ 27 VDC	3.00 ~ 2.33 A	2%	63W	2W
TPIUU61-109	27 ~ 33 VDC	2.33 ~ 1.90 A	2%	63W	2W
TPIUU61-110	33 ~ 40 VDC	1.90 ~ 1.57 A	2%	63W	2W
TPIUU61-111	40 ~ 48 VDC	1.57 ~ 1.31 A	2%	63W	2W

Output Voltage And Current Rating Chart (Multi Output) :

Model Number	Output #1				Output #2				Output #3				Output #4				Max. Output Power	Pno (max.)
	Vonorm	Iomin	Iomax	Regmax	Vonorm	Iomin	Iomax	Regmax	Vonorm	Iomin	Iomax	Regmax	Vonorm	Iomin	Iomax	Regmax		
TPIUU61-200	+3.3V	1.4A	7A	6%	+12V	0.6A	3A	5%									59.1W	2W
TPIUU61-201	+5V	0.7A	7A	5%	+12V	0.3A	3A	5%									63W	2W
TPIUU61-202	+5V	0.7A	7A	5%	+15V	0.3A	3A	5%									63W	2W
TPIUU61-203	+5V	0.7A	7A	5%	+24V	0.4A	2A	5%									63W	2W
TPIUU61-204	+3.3V	1.4A	7A	6%	+5V	0.5A	5A	5%									48.1W	2W
TPIUU61-215	+5V	1.4A	7A	5%					-24V	0.2A	2A	5%					63W	2W
TPIUU61-300	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W	2W
TPIUU61-300-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W	2W
TPIUU61-301	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-5V	0A	0.8A	5%					63W	2W
TPIUU61-301-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+5V	0A	0.8A	5%					63W	2W
TPIUU61-302	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					63W	2W
TPIUU61-302-1	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					63W	2W
TPIUU61-303	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%					63W	2W
TPIUU61-303-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%					63W	2W
TPIUU61-305	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	-12V	0A	0.8A	5%					63W	2W
TPIUU61-305-1	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	+12V	0A	0.8A	5%					63W	2W
TPIUU61-306	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-5V	0A	0.8A	5%					59.8W	2W
TPIUU61-306-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+5V	0A	0.8A	5%					59.8W	2W
TPIUU61-308	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	-12V	0A	1A	5%					53.5W	2W
TPIUU61-308-1	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	+12V	0A	1A	5%					53.5W	2W
TPIUU61-400	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU61-400-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU61-400-2	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU61-400-3	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU61-401	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU61-401-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU61-401-2	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU61-401-3	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU61-402	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W	2W
TPIUU61-402-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W	2W
TPIUU61-402-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-12V	0A	0.8A	5%	63W	2W
TPIUU61-402-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+12V	0A	0.8A	5%	63W	2W
TPIUU61-403	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W	2W
TPIUU61-403-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W	2W
TPIUU61-403-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-24V	0A	0.8A	5%	63W	2W
TPIUU61-403-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+24V	0A	0.8A	5%	63W	2W
TPIUU61-404	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU61-404-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W
TPIUU61-404-2	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	-5V	0A	0.8A	5%	63W	2W
TPIUU61-404-3	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	+5V	0A	0.8A	5%	63W	2W

Mechanical Specifications :

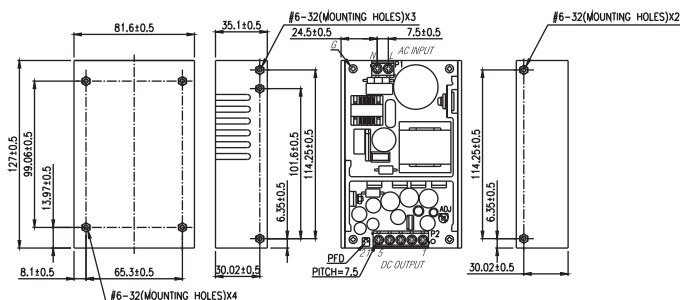

Note:

- Dimensions are shown in inches or mm.
- Weight: 425gs approx.
- Input connector mates with screw terminal (DINKLE#ESK750V-02P)(10-24AWG).
- Output connector mates with screw terminal (DINKLE#ESK750V-05P)(10-24AWG).

PIN CHART


MODEL	1	2	3	4	5
TPIUU61-1XX	OUT	OUT	RTN	RTN	RTN
TPIUU61-2XX	Vo2	Vo1	COM	N/C	N/C
TPIUU61-215	N/C	Vo1	COM	Vo3	N/C
TPIUU61-3XX	Vo2	Vo1	COM	Vo3	N/C
TPIUU61-4XX	Vo2	Vo1	COM	Vo3	Vo4

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3 Vo4:Output#4

PFD (Optional)

Other connector	1	2
1	OUT	RTN
2	OUT	RTN
3	OUT	RTN
4	OUT	RTN

Derating Curve :

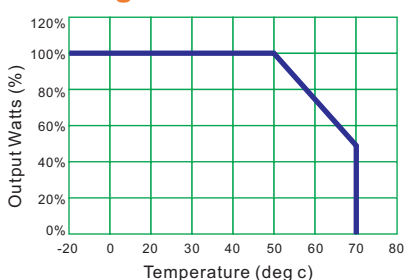

- Operating Temperature: -20 to 70°C
- Derate linearly from 100% load at 50°C to 50% load at 70°C

