TPS22924D 3.6-V, 2-A, 18.3-mΩ On-Resistance Load Switch

1 Features

- Integrated Single-Channel Load Switch
- Input Voltage: 0.75 V to 3.6 V
- On-Resistance
  - r_{ON} = 18.3 mΩ at V_{IN} = 3.6 V
  - r_{ON} = 18.5 mΩ at V_{IN} = 2.5 V
  - r_{ON} = 19.6 mΩ at V_{IN} = 1.8 V
  - r_{ON} = 19.4 mΩ at V_{IN} = 1.2 V
  - r_{ON} = 20.3 mΩ at V_{IN} = 1.0 V
  - r_{ON} = 22.7 mΩ at V_{IN} = 0.75 V
- Small CSP-6 package
  0.9 mm x 1.4 mm, 0.5-mm Pitch
- 2-A Maximum Continuous Switch Current
- Low Shutdown Current
- Low Threshold Control Input
- Controlled Slew Rate to Avoid Inrush Currents
- Quick Output Discharge Transistor
- ESD Performance Tested Per JESD 22
  - 5000-V Human-Body Model
    (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)

2 Applications

- Battery Powered Equipment
- Portable Industrial Equipment
- Portable Medical Equipment
- Portable Media Players
- Point of Sales Terminal
- GPS Devices
- Digital Cameras
- Notebooks / Tablet PCs / eReaders
- Smartphones

3 Description

The TPS22924D is a small, low R_{ON} load switch with controlled turn on. The device contains a N-channel MOSFET that can operate over an input voltage range of 0.75 V to 3.6 V. An integrated charge pump biases the NMOS switch to achieve a minimum switch ON resistance. The switch is controlled by an on/off input (ON), which is capable of interfacing directly with low-voltage control signals.

A 1250 Ω on-chip load resistor is added for output quick discharge when the switch is turned off. The rise time of the device is internally controlled to avoid inrush current. The TPS22924D features a rise time of 6200 µs at 3.6 V.


The TPS22924D is available in an ultra-small, space-saving 6-pin CSP package and is characterized for operation over the free-air temperature range of –40ºC to 85ºC.

Device Information (1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TPS22924D	DSBGA (6)	0.9 mm x 1.4 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

Typical Application Diagram

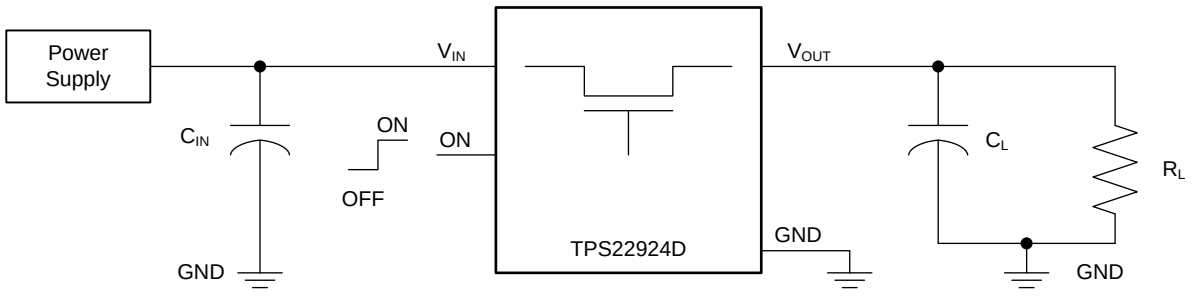

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features ... 1
2 Applications ... 1
3 Description ... 1
4 Revision History ... 2
5 Pin Configuration and Functions ... 3
6 Specifications ... 3
6.1 Absolute Maximum Ratings ... 3
6.2 ESD Ratings ... 3
6.3 Recommended Operating Conditions ... 4
6.4 Thermal Information ... 4
6.5 Electrical Characteristics ... 4
6.6 Switching Characteristics: V_{IN} = 3.6 V ... 5
6.7 Switching Characteristics: V_{IN} = 0.9 V ... 5
6.8 Dissipation Ratings ... 5
6.9 Typical Characteristics ... 6
7 Parametric Measurement Information ... 10
8 Detailed Description ... 11
8.1 Overview ... 11
8.2 Functional Block Diagram ... 11
8.3 Feature Description ... 11
8.4 Device Functional Modes ... 12
9 Application and Implementation ... 13
9.1 Application Information ... 13
9.2 Typical Application ... 13
10 Power Supply Recommendations ... 15
11 Layout ... 15
11.1 Layout Guidelines ... 15
11.2 Layout Example ... 15
12 Device and Documentation Support ... 16
12.1 Community Resources ... 16
12.2 Trademarks ... 16
12.3 Electrostatic Discharge Caution ... 16
12.4 Glossary ... 16
13 Mechanical, Packaging, and Orderable Information ... 16


4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (May 2013) to Revision A	Page
• Added *Pin Configuration and Functions* section, *ESD Ratings* table, *Feature Description* section, *Device Functional Modes*, *Application and Implementation* section, *Power Supply Recommendations* section, *Layout* section, *Device and Documentation Support* section, and *Mechanical, Packaging, and Orderable Information* section	1

Copyright © 2013–2015, Texas Instruments Incorporated

5 Pin Configuration and Functions

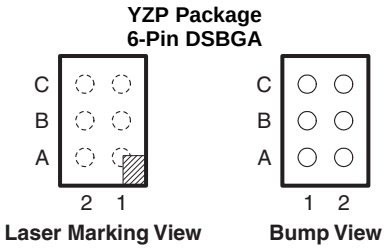

Pin Assignments (YZP Package)

C	GND	ON
B	VOUT	VIN
A	VOUT	VIN
	1	2

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
GND	C1	-—	Ground
ON	C2	I	Switch control input, active high. Do not leave floating
VIN	A2, B2	I	Switch input. Place a decoupling capacitor from VIN to GND. See Application Information section for details about input capacitors.
VOUT	A1, B1	O	Switch output

6 Specifications

6.1 Absolute Maximum Ratings (1)

		MIN	MAX	UNIT
V_{IN}	Input voltage	–0.3	4	V
V_{OUT}	Output voltage		V_{IN} + 0.3	V
V_{ON}	ON pin voltage	–0.3	4	V
I_{MAX}	Maximum continuous switch current, T_A = -40°C to 85°C		2	A
I_{PLS}	Maximum pulsed switch current, 100-µs pulse, 2% duty cycle, T_A = -40°C to 85°C		4	A
T_A	Operating free-air temperature	–40	85	°C
T_{stg}	Storage temperature	–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±5000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 (2)	±1000	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Copyright © 2013–2015, Texas Instruments Incorporated

6.3 Recommended Operating Conditions

			MIN	MAX	UNIT
V_{IN}	Input voltage		0.75	3.6	V
V_{OUT}	Output voltage			V_{IN}	V
V_{IH}	High-level input voltage, ON	V_{IN} = 2.5 V to 3.6 V	1.2	3.6	V
		V_{IN} = 0.75 V to 2.5 V	0.9	3.6	
V_{IL}	Low-level input voltage, ON	V_{IN} = 2.5 V to 3.6 V		0.6	V
		V_{IN} = 0.75 V to 2.49 V		0.4	
C_{IN}	Input capacitance		1 (1)		µF

(1) See the *Input Capacitor* section in Application Information.

6.4 Thermal Information

THERMAL METRIC (1)		TPS22924D YZP (DSBGA) 6 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	123	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	17.6	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	22.8	°C/W
ψ_{JT}	Junction-to-top characterization parameter	5.7	°C/W
ψ_{JB}	Junction-to-board characterization parameter	22.6	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, SPRA953.

6.5 Electrical Characteristics

V_{IN} = 0.75 V to 3.6 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP (1)	MAX	UNIT
$I_{Q, VIN}$	Quiescent current	VOUT = open, V_{IN} = V_{ON}	V_{IN} = 3.6 V	Full		75	160	µA
			V_{IN} = 2.5 V			42	100	
			V_{IN} = 1.8 V			50	350	
			V_{IN} = 1.2 V			95	200	
			V_{IN} = 1.0 V			65	120	
			V_{IN} = 0.75 V			35	80	
$I_{SD, VIN}$	Shutdown current	V_{ON} = GND, VOUT = 0V		Full			4.0	µA
R_{ON}	ON-state resistance	I_{OUT} = -200 mA	V_{IN} = 3.6 V	25°C		18.3	22.8	mΩ
				Full			26.8	
			V_{IN} = 2.5 V	25°C		18.5	23.0	
				Full			27.2	
			V_{IN} = 1.8 V	25°C		19.6	24.1	
				Full			28.1	
			V_{IN} = 1.2 V	25°C		19.4	23.9	
				Full			28.0	
			V_{IN} = 1.0 V	25°C		20.3	24.8	
				Full			29.0	
			V_{IN} = 0.75 V	25°C		22.7	27.2	
				Full			34.8	
R_{PD}	Output pulldown resistance (2)	V_{IN} = 3.3 V, V_{ON} = 0, I_{OUT} = 1 mA		25°C	450		1400	Ω

(1) Typical values are at V_{IN} = 3.3 V and T_A = 25°C.
(2) See *Output Pulldown*.

Copyright © 2013–2015, Texas Instruments Incorporated

Electrical Characteristics (continued)

V_{IN} = 0.75 V to 3.6 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A	MIN	TYP (1)	MAX	UNIT
I_{ON}	ON-pin input leakage current	V_{ON} = 0.9 V to 3.6 V or GND	Full			0.1	µA

6.6 Switching Characteristics: V_{IN} = 3.6 V

V_{IN} = 3.6 V, T_A = 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{ON}	Turn-ON time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 3.6V		7400		µs
t_{OFF}	Turn-OFF time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 3.6V		2.5		µs
t_r	V_{OUT} rise time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 3.6V		6200		µs
t_f	V_{OUT} fall time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 3.6V		2		µs

6.7 Switching Characteristics: V_{IN} = 0.9 V

V_{IN} = 0.9 V, T_A = 25°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{ON}	Turn-ON time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 0.9V		6300		µs
t_{OFF}	Turn-OFF time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 0.9V		12		µs
t_r	V_{OUT} rise time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 0.9V		3200		µs
t_f	V_{OUT} fall time	R_L = 10 Ω, C_L = 0.1 µF, V_{IN} = 0.9V		3		µs

6.8 Dissipation Ratings

BOARD	DERATING FACTOR ABOVE T_A = 25°C	T_A < 25°C	T_A = 70°C	T_A = 85°C
High-K (1)	- 8.1063 mW/°C	810.63 mW	445.84 mW	324.25 mW

(1) The JEDEC high-K (2s2p) board used to derive this data was a 3- × 3-inch, multilayer board with 1-ounce internal power and ground planes and 2-ounce copper traces on top and bottom of the board.

Copyright © 2013–2015, Texas Instruments Incorporated

6.9 Typical Characteristics

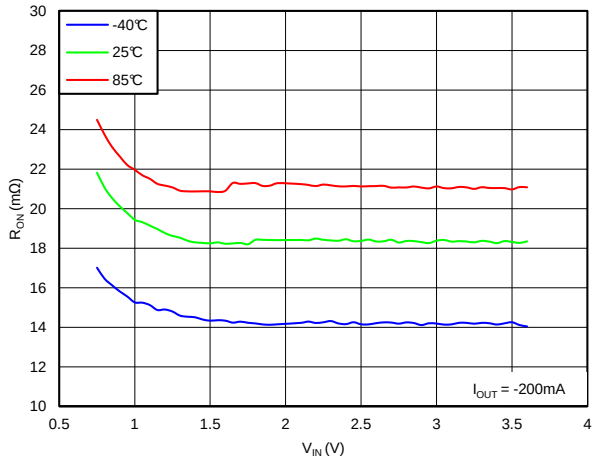


Figure 1. On-State Resistance vs Input Voltage

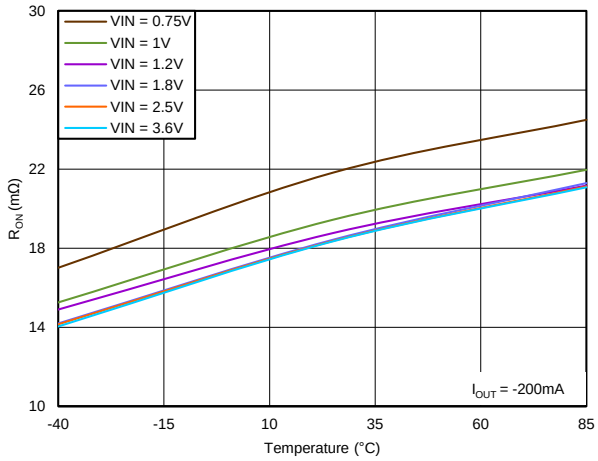


Figure 2. On-State Resistance vs Temperature

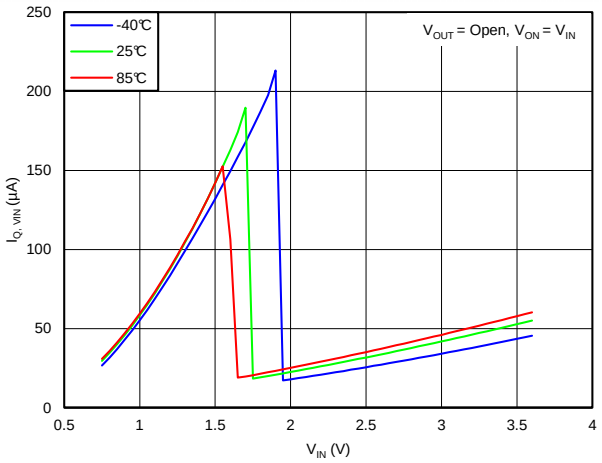


Figure 3. Quiescent Current vs Input Voltage

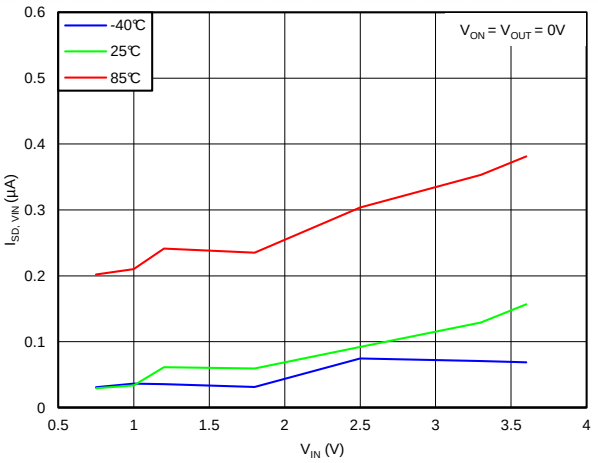


Figure 4. Shutdown Current vs Input Voltage

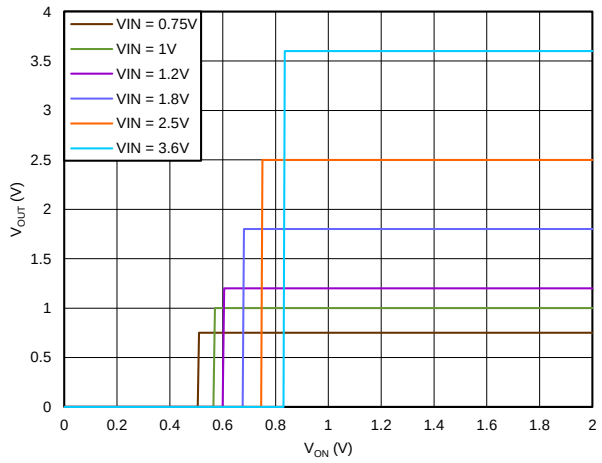


Figure 5. On Input Threshold

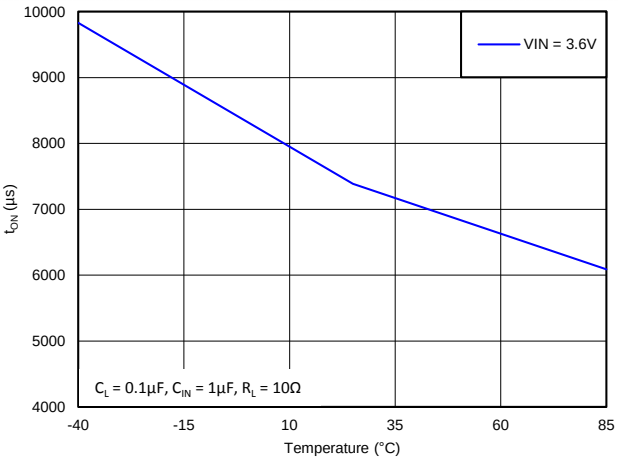


Figure 6. Turnon Time vs Temperature (V_{IN} = 3.6 V, C_L = 0.1 µF, R_L = 10 Ω)

Copyright © 2013–2015, Texas Instruments Incorporated

Typical Characteristics (continued)

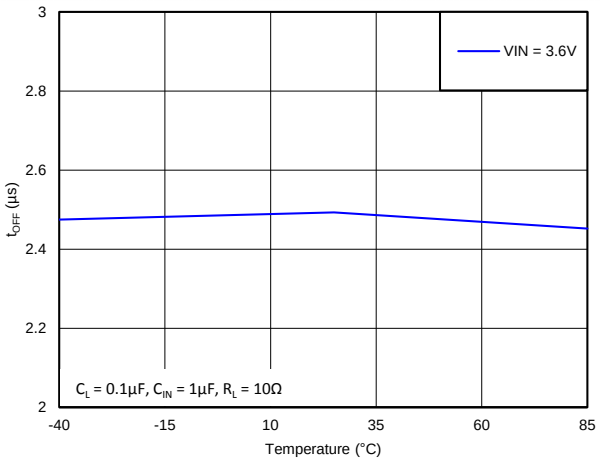


Figure 7. Turnoff Time vs Temperature (V_{IN} = 3.6 V, C_L = 0.1 µF, R_L = 10 Ω)

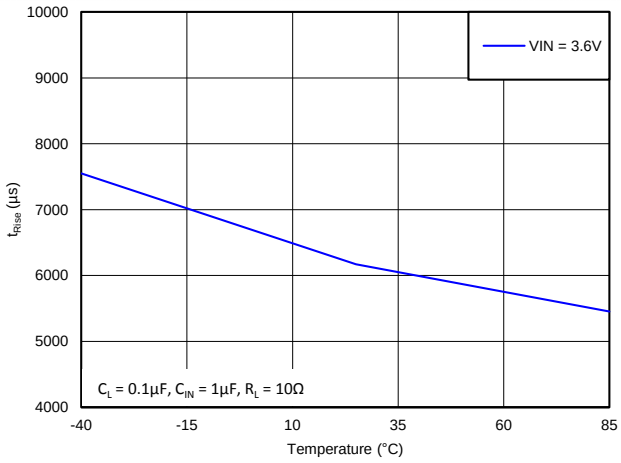


Figure 8. Rise Time vs Temperature (V_{IN} = 3.6 V, C_L = 0.1 µF, R_L = 10 Ω)

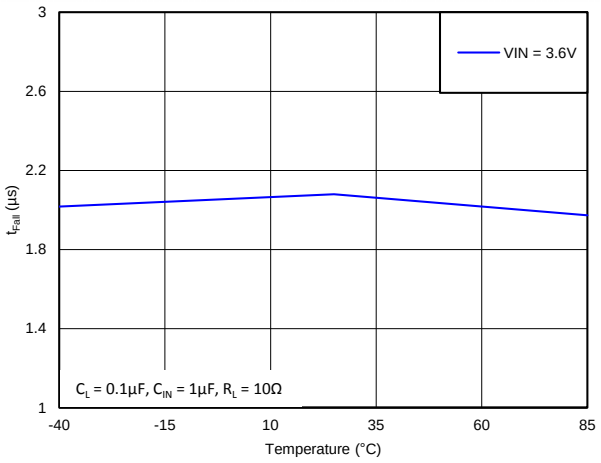


Figure 9. Fall Time vs Temperature (V_{IN} = 3.6 V, C_L = 0.1 µF, R_L = 10 Ω)

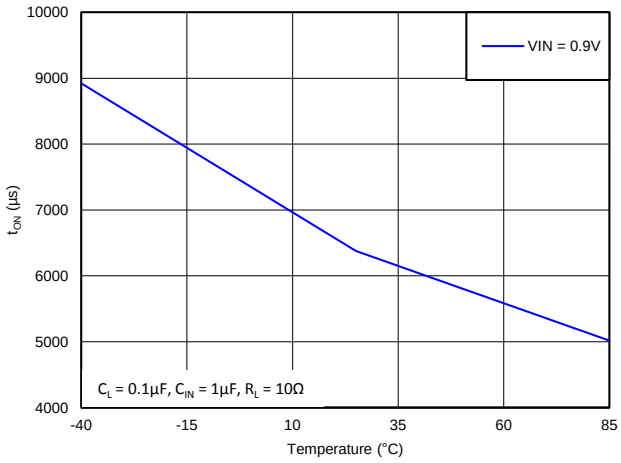


Figure 10. Turnon Time vs Temperature (V_{IN} = 0.9 V, C_L = 0.1 µF, R_L = 10 Ω)

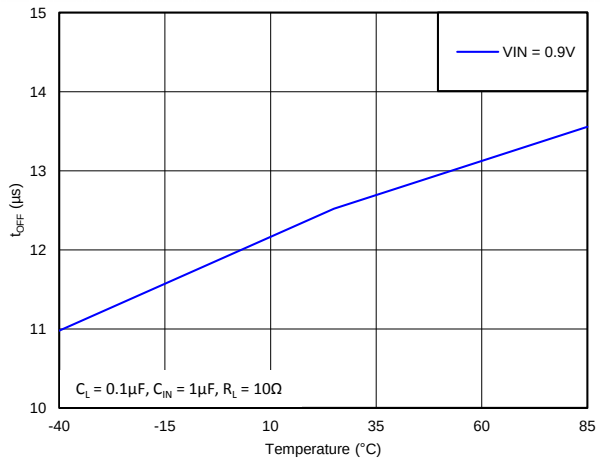


Figure 11. Turnoff Time vs Temperature (V_{IN} = 0.9 V, C_L = 0.1 µF, R_L = 10 Ω)

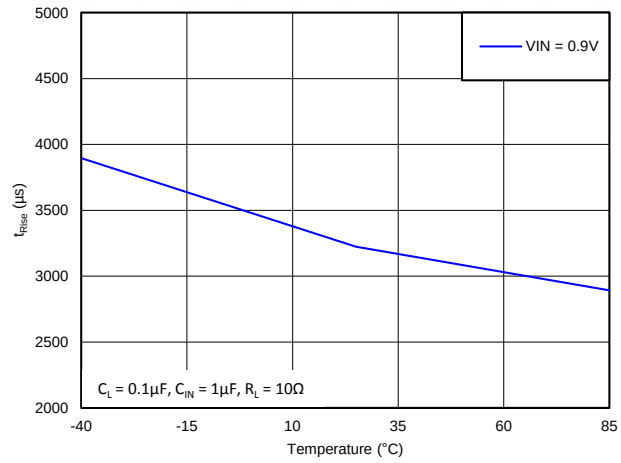


Figure 12. Rise Time vs Temperature (V_{IN} = 0.9 V, C_L = 0.1 µF, R_L = 10 Ω)

Copyright © 2013–2015, Texas Instruments Incorporated

Typical Characteristics (continued)

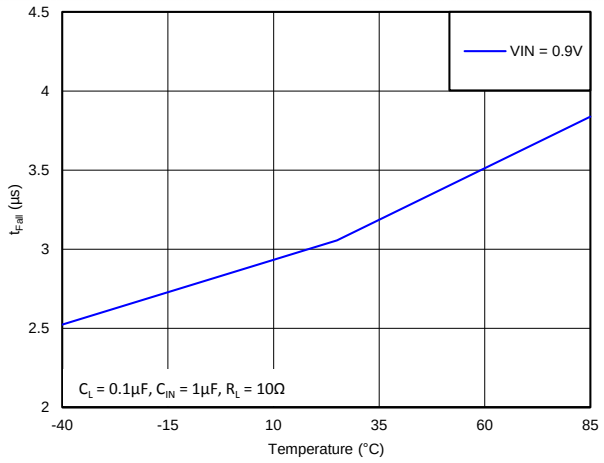


Figure 13. Fall Time vs Temperature
(V_{IN} = 0.9 V, C_L = 0.1 µF, R_L = 10 Ω)

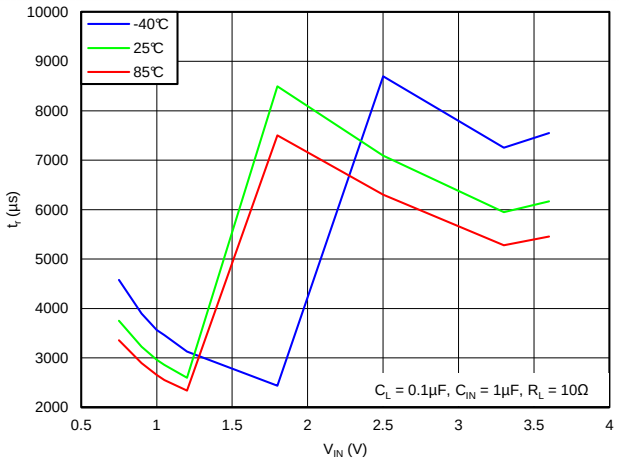


Figure 14. Rise Time vs Input Voltage
(C_L = 0.1 µF, R_L = 10 Ω, V_{ON} = 1.8 V)

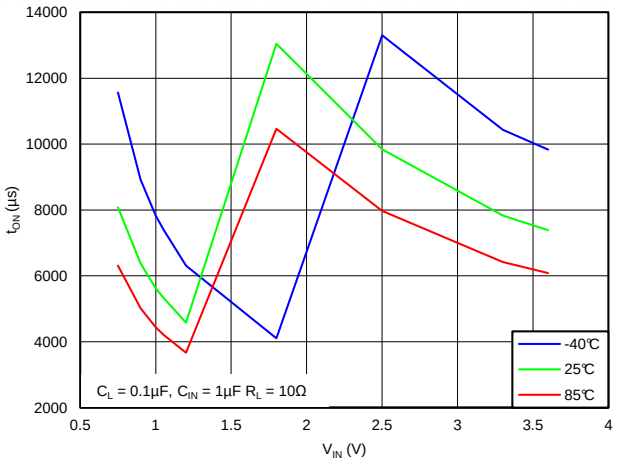


Figure 15. Turnon Time vs Input Voltage
(C_L = 0.1 µF, R_L = 10 Ω, V_{ON} = 1.8 V)

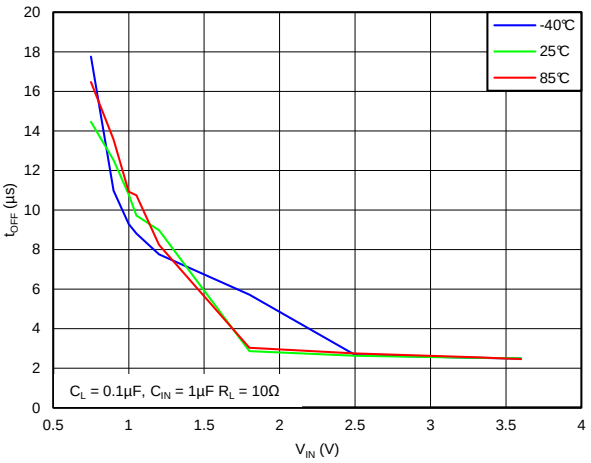


Figure 16. Turnoff Time vs Input Voltage
(C_L = 0.1 µF, R_L = 10 Ω, V_{ON} = 1.8 V)

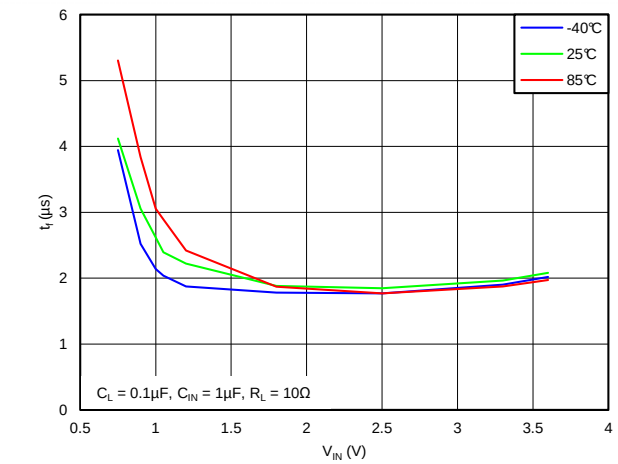


Figure 17. Fall Time vs Input Voltage
(C_L = 0.1 µF, R_L = 10 Ω, V_{ON} = 1.8 V)

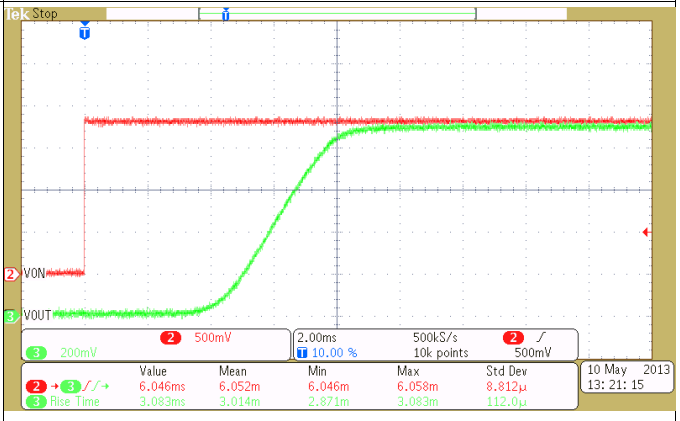


Figure 18. Turnon Response
(C_{IN} = 1 µF, C_L = 0.1 µF, R_L = 10 Ω, V_{IN} = 0.9 V, T_A = 25°C)

Copyright © 2013–2015, Texas Instruments Incorporated

Typical Characteristics (continued)

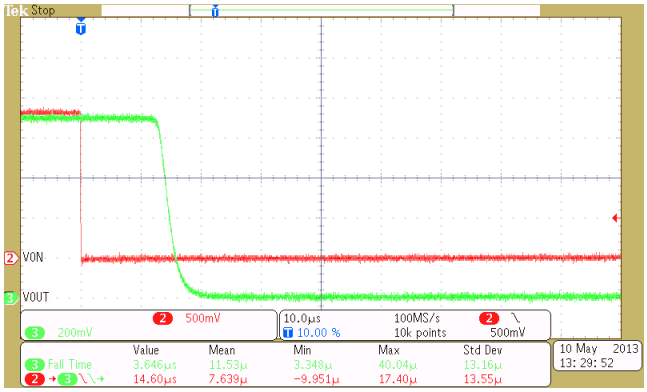


Figure 19. Turnoff Response
(C_{IN} = 1 µF, C_L = 0.1 µF, R_L = 10 Ω, V_{IN} = 0.9 V, T_A = 25°C)

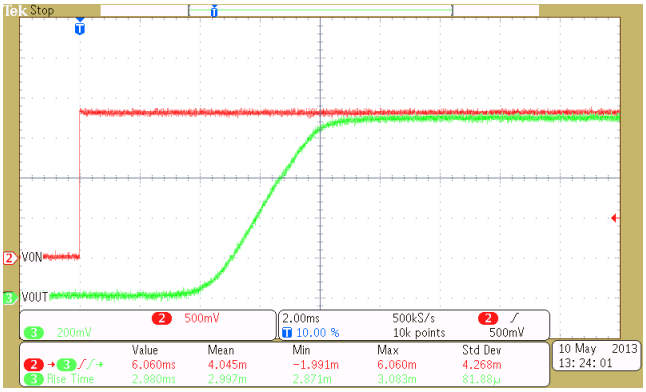


Figure 20. Turnon Response
(C_{IN} = 10 µF, C_L = 1 µF, R_L = 10 Ω, V_{IN} = 0.9 V, T_A = 25°C)

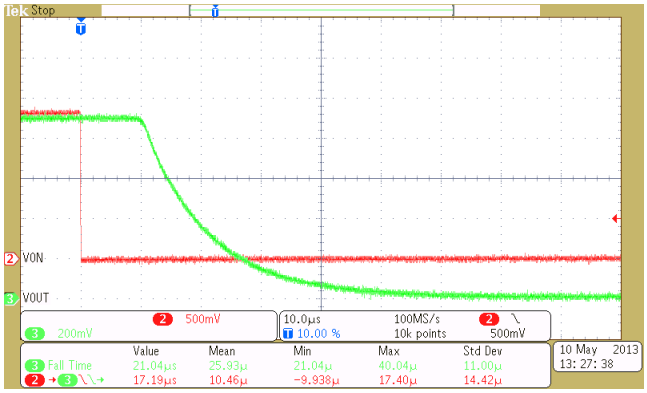


Figure 21. Turnoff Response
(C_{IN} = 10 µF, C_L = 1 µF, R_L = 10 Ω, V_{IN} = 0.9 V, T_A = 25°C)

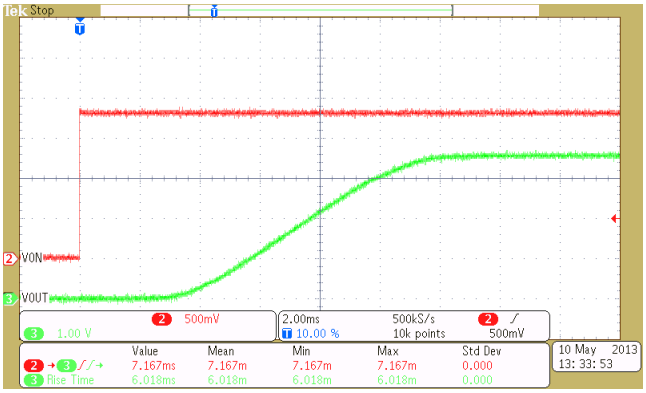


Figure 22. Turnon Response
(C_{IN} = 1 µF, C_L = 0.1 µF, R_L = 10 Ω, V_{IN} = 3.6 V, T_A = 25°C)



Figure 23. Turnoff Response
(C_{IN} = 1 µF, C_L = 0.1 µF, R_L = 10 Ω, V_{IN} = 3.6 V, T_A = 25°C)

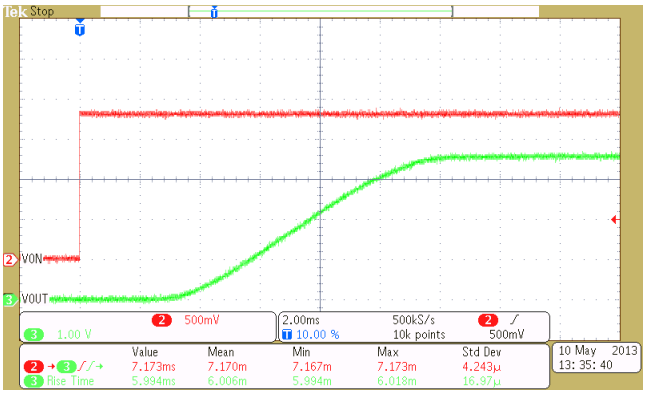


Figure 24. Turnon Response
(C_{IN} = 10 µF, C_L = 1 µF, R_L = 10 Ω, V_{IN} = 3.6 V, T_A = 25°C)

Copyright © 2013–2015, Texas Instruments Incorporated

Typical Characteristics (continued)



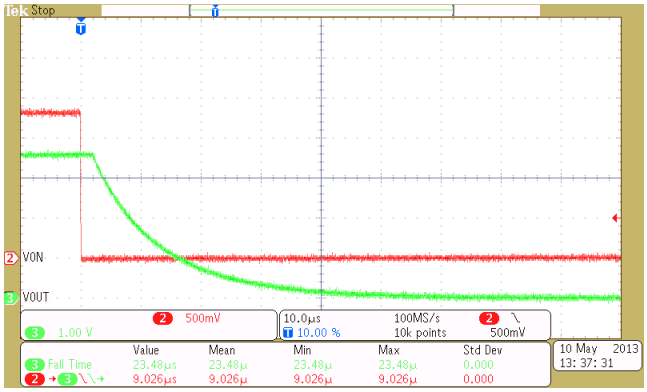


Figure 25. Turnoff Response
(C_{IN} = 10 µF, C_L = 1 µF, R_L = 10 Ω, V_{IN} = 3.6 V, T_A = 25°C)

7 Parametric Measurement Information

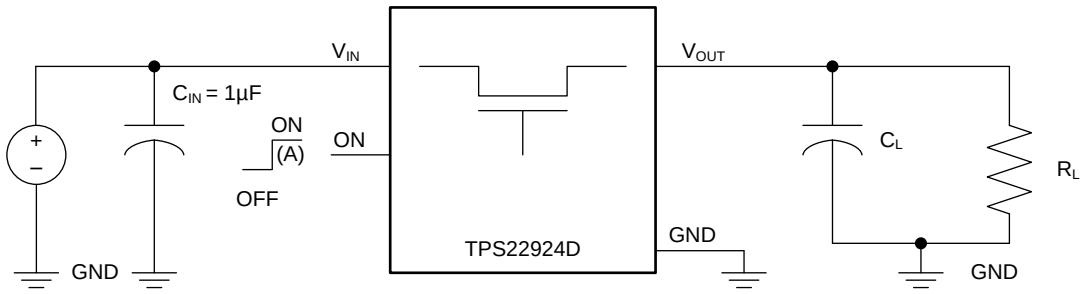

TEST CIRCUIT

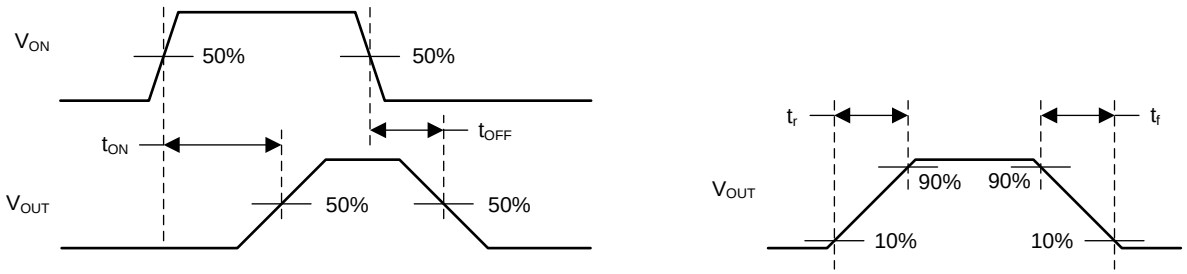

t_{ON}/t_{OFF} WAVEFORMS

A. Rise and fall times of the control signal is 100ns

Figure 26. Test Circuit and t_{ON}/t_{OFF} Waveforms

Copyright © 2013–2015, Texas Instruments Incorporated


8 Detailed Description

8.1 Overview

The TPS22924D is a single channel, 2-A load switch in a small, space-saving CSP-6 package. This device implements a low resistance N-channel MOSFET with a controlled rise time for applications that need to limit the inrush current.

This device is also designed to have very low leakage current during off state. This prevents downstream circuits from pulling high standby current from the supply. Integrated control logic, driver, power supply, and output discharge FET eliminates the need for additional external components, which reduces solution size and bill of materials (BOM) count.

8.2 Functional Block Diagram

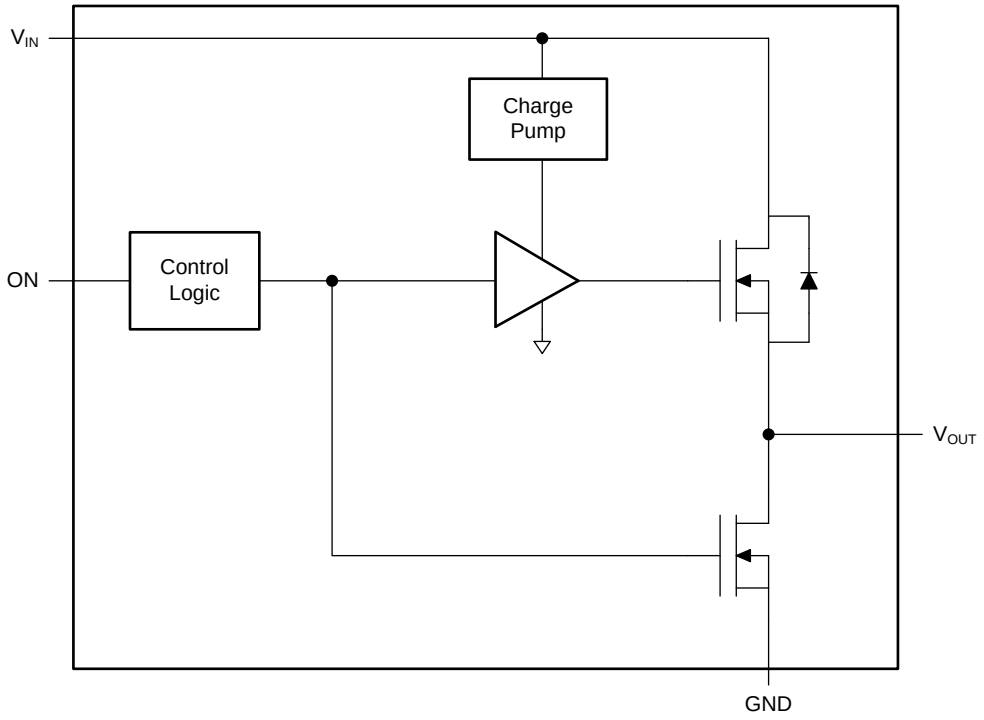

8.3 Feature Description

Table 1 lists the features of the TPS2222924D device.

Table 1. Feature List

DEVICE	r_{ON} (TYP) AT 3.6 V	SLEW RATE (TYP) AT 3.6 V	QUICK OUTPUT DISCHARGE (1)	MAXIMUM OUTPUT CURRENT	ENABLE
TPS22924D	18.3 mΩ	6200 µs	Yes	2 A	Active high

(1) This feature discharges the output of the switch to ground through a 1250-Ω resistor, preventing the output from floating. See the *Output Pulldown* section in Application Information.

8.3.1 ON/OFF Control

The ON pin controls the state of the switch. Asserting ON high enables the switch. ON is active high and has a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic threshold. It can be used with any microcontroller with 1.2-V, 1.8-V, 2.5-V or 3.3-V GPIOs.

Copyright © 2013–2015, Texas Instruments Incorporated

8.3.2 Output Pulldown

The output pulldown is active when the user is turning off the main pass FET. The pulldown discharges the output rail to approximately 10% of the rail, then the output pulldown is automatically disconnected to optimize the shutdown current.

8.4 Device Functional Modes

Table 2 lists the functional modes of the TPS22924D device.

Table 2. Function Table

ON (Control Signal)	VIN to VOUT	VOUT to GND (1)
L	OFF	ON
H	ON	OFF

(1) See *Output Pulldown*.

Copyright © 2013–2015, Texas Instruments Incorporated

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 VIN to VOUT Voltage Drop

The VIN to VOUT voltage drop in the device is determined by the R_{ON} of the device and the load current. The R_{ON} of the device depends upon the VIN condition of the device. Refer to the R_{ON} specification of the device in the Electrical Characteristics table of this datasheet. Once the R_{ON} of the device is determined based upon the VIN conditions, use Equation 1 to calculate the VIN to VOUT voltage drop:

$$\Delta V = I_{LOAD} \times R_{ON} \quad (1)$$

where

- ΔV = Voltage drop from VIN to VOUT
- I_{LOAD} = Load current
- R_{ON} = On-resistance of the device for a specific V_{IN}
- An appropriate I_{LOAD} must be chosen such that the I_{MAX} specification of the device is not violated.

9.1.2 Input Capacitor

To limit the voltage drop on the input supply caused by transient inrush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between V_{IN} and GND. A 1-µF ceramic capacitor, C_{IN}, placed close to the pins is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop.

9.1.3 Output Capacitor

Due to the integrated body diode in the NMOS switch, a C_{IN} greater than C_L is highly recommended. A C_L greater than C_{IN} can cause V_{OUT} to exceed V_{IN} when the system supply is removed. This could result in current flow through the body diode from V_{OUT} to V_{IN}. A C_{IN} to C_L ratio of 10 to 1 is recommended for minimizing V_{IN} dip caused by inrush currents during startup.

9.2 Typical Application

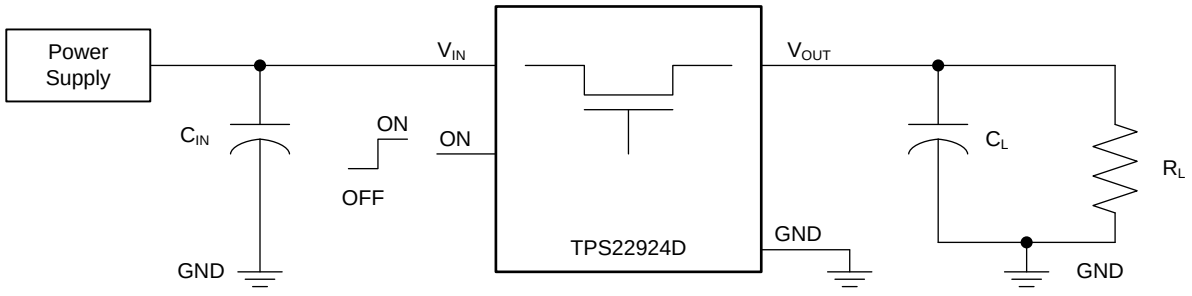


Figure 27. TPS22924D Typical Application

Typical Application (continued)

9.2.1 Design Requirements

Table 3 shows the design requirements for this application.

Table 3. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
V_{IN}	3.6 V
C_L	100 µF
Maximum Acceptable Inrush Current	100 mA

9.2.2 Detailed Design Procedure

9.2.2.1 Managing Inrush Current

When the switch is enabled, the output capacitors must be charged up from 0 V to V_{IN}. This charge arrives in the form of inrush current. Inrush current can be calculated using the following equation:

$$\text{Inrush Current} = C \times \frac{dv}{dt}$$

where

- C = Output capacitance
- dv = Output voltage
- dt = Rise time (2)

The TPS22924D offers a very slow controlled rise time for minimizing inrush current. This device can be selected based upon the maximum acceptable slew rate which can be calculated using the design requirements and the inrush current equation. An output capacitance of 100 µF will be used since the amount of inrush increases with output capacitance:

100mA = 100µF × (3.6V / dt) (3)

dt = 3600µs (4)

To ensure an inrush current of less than 100 mA, a device with a rise time greater than 3600 µs must be used.

The TPS22924D has a typical rise time of 6200 µs at 3.6 V. This meets the above design requirements.

9.2.3 Application Curve

Figure 28 shows the TPS22924D turning on into a 100 µF load.

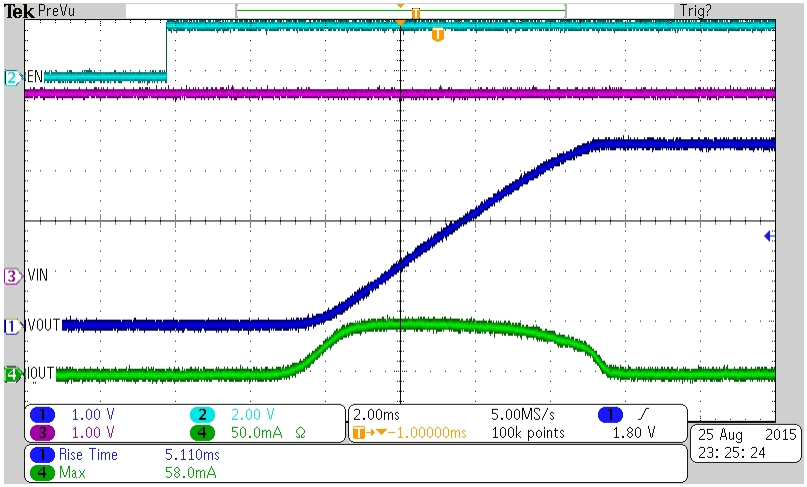


Figure 28. TPS22924D Inrush Current With a 100µF Load

Copyright © 2013–2015, Texas Instruments Incorporated

10 Power Supply Recommendations

The device is designed to operate with a VIN range of 0.75 V to 3.6 V. This supply must be well regulated and placed as close to the device terminal as possible with the recommended 1 µF bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10 µF may be sufficient.

11 Layout

11.1 Layout Guidelines

For best performance, all traces should be as short as possible. To be most effective, the input and output capacitors should be placed close to the device to minimize the effects that parasitic trace inductances may have on normal and short-circuit operation. Using wide traces for V_{IN}, V_{OUT}, and GND helps minimize the parasitic electrical effects along with minimizing the case to ambient thermal impedance.

11.2 Layout Example

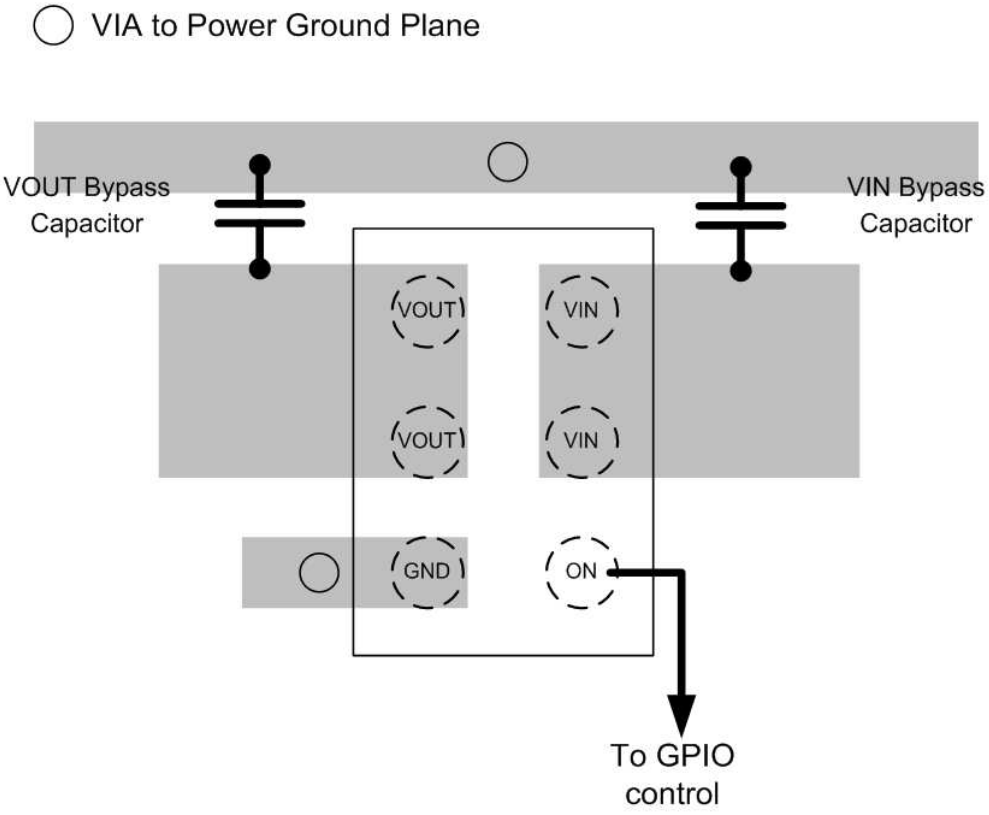


Figure 29. TPS22924D Layout Example

12 Device and Documentation Support

12.1 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community ***TI's Engineer-to-Engineer (E2E) Community.*** Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support ***TI's Design Support*** Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.2 Trademarks

E2E is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.4 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2013–2015, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS22924DYZPR	ACTIVE	DSBGA	YZP	6	3000	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	DL	Samples
TPS22924DYZPT	ACTIVE	DSBGA	YZP	6	250	Green (RoHS & no Sb/Br)	SNAGCU	Level-1-260C-UNLIM	-40 to 85	DL	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

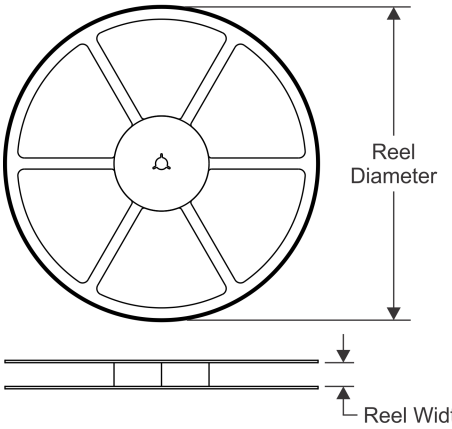


TAPE DIMENSIONS

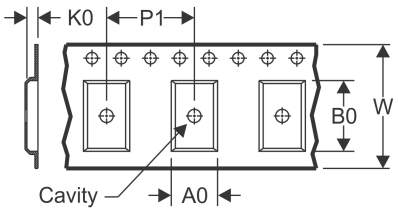

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

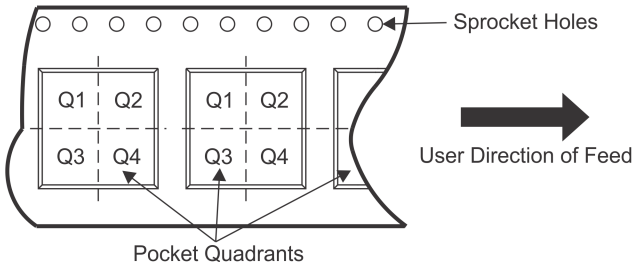

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22924DYZPR	DSBGA	YZP	6	3000	178.0	9.2	1.02	1.52	0.63	4.0	8.0	Q1
TPS22924DYZPT	DSBGA	YZP	6	250	178.0	9.2	1.02	1.52	0.63	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS

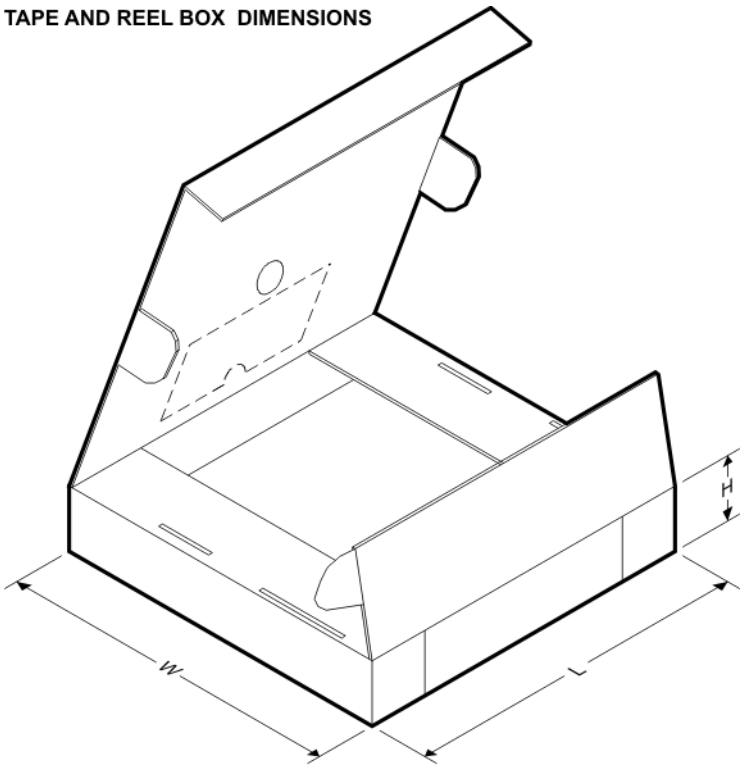

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22924DYZPR	DSBGA	YZP	6	3000	220.0	220.0	35.0
TPS22924DYZPT	DSBGA	YZP	6	250	220.0	220.0	35.0

PACKAGE OUTLINE

YZP0006

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

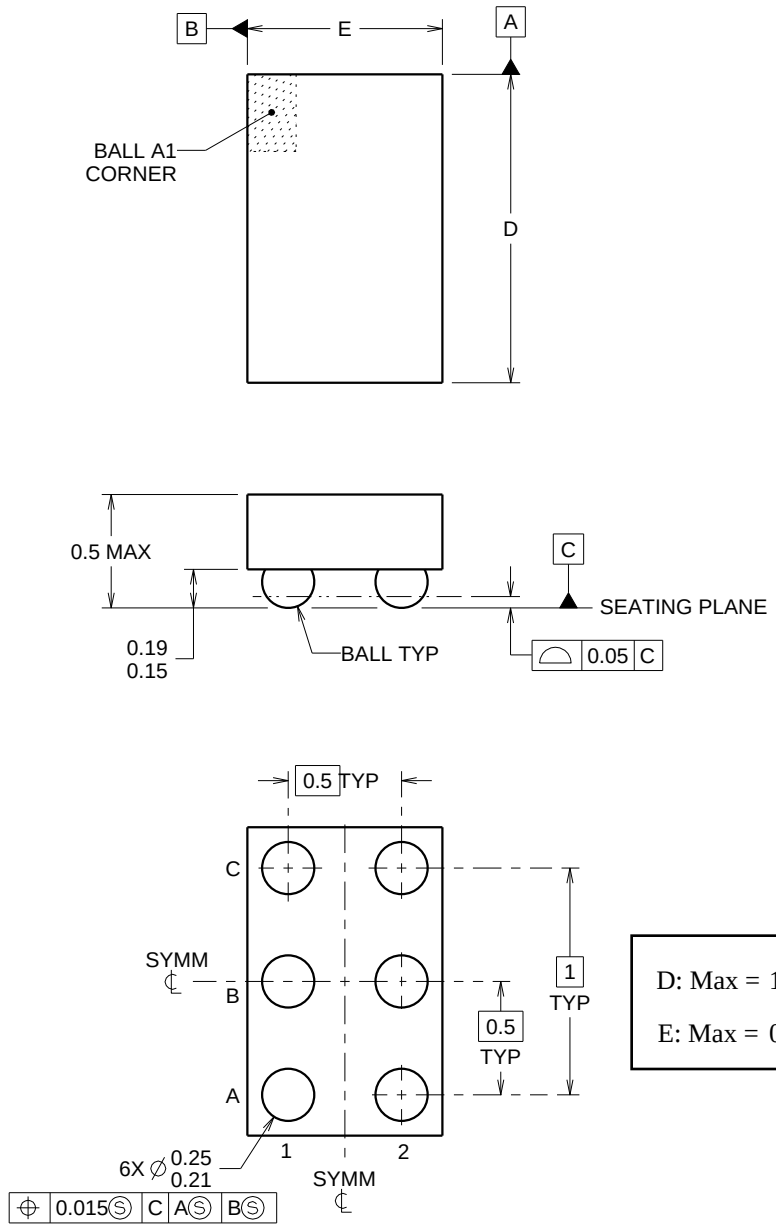

D: Max = 1.418 mm, Min =1.358 mm


E: Max = 0.918 mm, Min =0.858 mm

4219524/A 06/2014


NOTES:

NanoFree Is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. NanoFree™ package configuration.

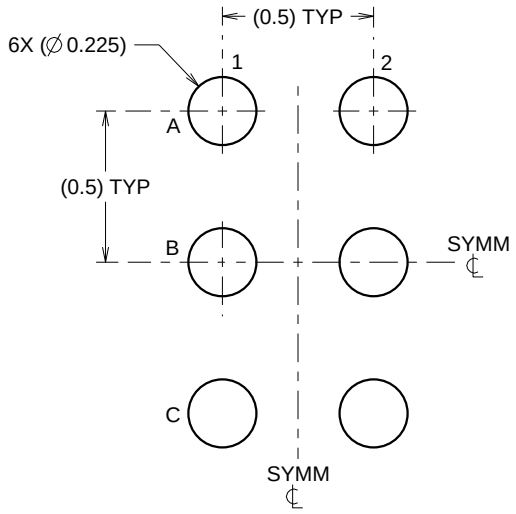

LAND PATTERN EXAMPLE
SCALE:40X

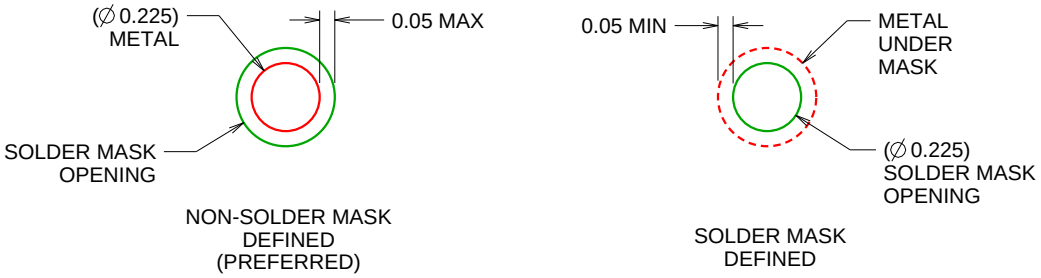


SOLDER MASK DETAILS
NOT TO SCALE

4219524/A 06/2014

NOTES: (continued)

4. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SBVA017 (www.ti.com/lit/sbva017).

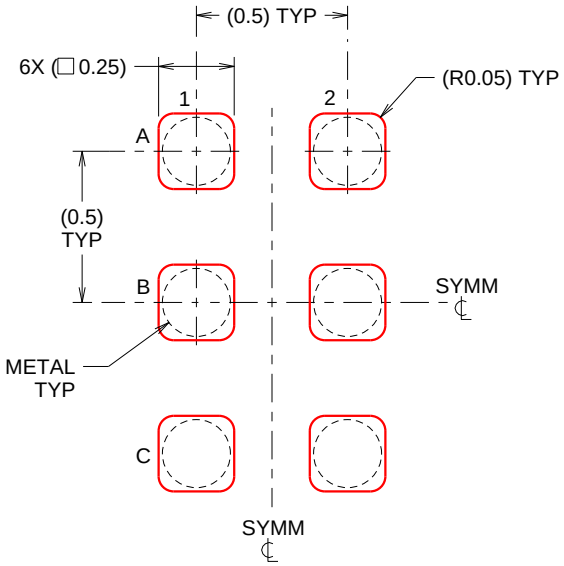

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE:40X

4219524/A 06/2014

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2020, Texas Instruments Incorporated