TPS6206x-Q1 3-MHz 2-A Step-Down Converter in 2 × 2 SON Package

1 Features

- Qualified for Automotive Applications
- AEC-Q100 Qualified With the Following Results:
  - Device Temperature Grade 1: –40°C to 125°C Operating Junction Temperature Range
  - Device HBM ESD Classification Level 2
  - Device CDM ESD Classification Level C4B
- 3-MHz Switching Frequency
- V_{IN} Range from 2.9 V to 6 V
- Up to 97% Efficiency
- Power Save Mode and 3-MHz Fixed PWM Mode
- Power Good Output
- Output Voltage Accuracy in PWM Mode ±1.5%
- Output Capacitor Discharge Function
- Typical 18-µA Quiescent Current
- 100% Duty Cycle for Lowest Dropout
- Voltage Positioning
- Clock Dithering
- Supports Maximum 1-mm Height Solutions
- Available in a 2 × 2 × 0,75-mm WSON

2 Applications

- Point Of Load Regulator
- Automotive POL
- Automotive Camera Modules
- Car Infotainment and Navigation Systems
- ADAS Applications

3 Description

The TPS62065-Q1 and TPS62067-Q1 device is a highly-efficient synchronous step-down DC-DC converter. The device provides up to 2-A output current.

With an input voltage range of 2.9 V to 6 V the device is a perfect fit for power conversion from a 5-V or 3.3-V system supply rail. The TPS62065-Q1 and TPS62067-Q1 device operates at 3-MHz fixed frequency and enters power-save mode operation at light load currents to maintain high efficiency over the entire load current range. The power save mode is optimized for low output-voltage ripple. For low noise applications, the TPS62065-Q1 device can be forced into fixed frequency PWM mode by pulling the MODE pin high. The TPS62067-Q1 provides an open drain power good output. In the shutdown mode, the current consumption is reduced to 5 µA and an internal circuit discharges the output capacitor. The TPS62065-Q1 and TPS62067-Q1 device is optimized for operation with a tiny 1-µH inductor and a small 10-µF output capacitor to achieve smallest solution size and high regulation performance.


The TPS62065-Q1 and TPS62067-Q1 device is available in a small 2 × 2 × 0,75-mm 8-pin WSON package.

Device Information(1)


PART NUMBER	PACKAGE	BODY SIZE
TPS62065-Q1	WSON (8)	2.00 mm × 2.00 mm
TPS62067-Q1		

(1) For all available packages, see the orderable addendum at the end of the datasheet.

4 Typical Application Circuit

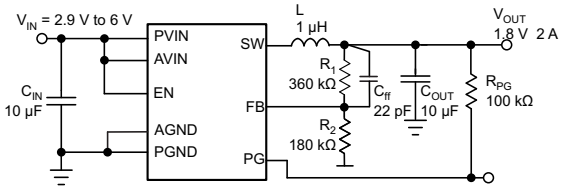

Efficiency vs Load Current

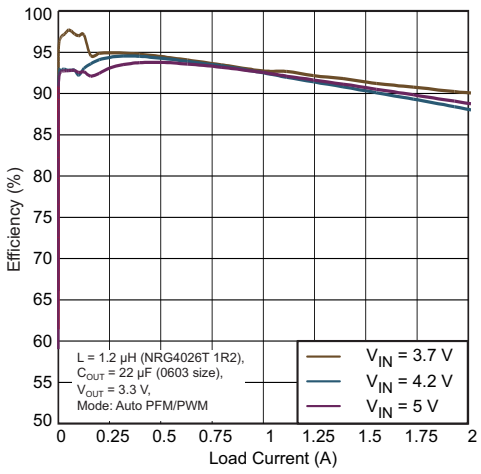

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features ... 1
2 Applications ... 1
3 Description ... 1
4 Typical Application Circuit ... 1
5 Revision History ... 2
6 Device Comparison Table ... 3
7 Pin Configuration and Functions ... 3
8 Specifications ... 4
8.1 Absolute Maximum Ratings ... 4
8.2 ESD Ratings ... 4
8.3 Recommended Operating Conditions ... 4
8.4 Thermal Information ... 4
8.5 Electrical Characteristics ... 5
8.6 Typical Characteristics ... 6
9 Parameter Measurement Information ... 7
10 Detailed Description ... 8
10.1 Overview ... 8
10.2 Functional Block Diagram ... 8
10.3 Feature Description ... 9
10.4 Device Functional Modes ... 10
11 Application and Implementation ... 13
11.1 Application Information ... 13
11.2 Typical Application ... 13
12 Power Supply Recommendations ... 19
13 Layout ... 20
13.1 Layout Guidelines ... 20
13.2 Layout Example ... 20
14 Device and Documentation Support ... 21
14.1 Device Support ... 21
14.2 Related Links ... 21
14.3 Trademarks ... 21
14.4 Electrostatic Discharge Caution ... 21
14.5 Glossary ... 21
15 Mechanical, Packaging, and Orderable Information ... 21

5 Revision History

DATE	REVISION	NOTES
January 2015	*	Initial release.


Copyright © 2015, Texas Instruments Incorporated

6 Device Comparison Table

PART NUMBER	MODE/PG FUNCTION
TPS62065Q1	MODE = selectable; Power Good = no
TPS62067Q1	Automatic PWM/PFM transition; Power Good = yes

7 Pin Configuration and Functions

DSG Package
8-Pin WSON With Exposed Thermal Pad
Top View

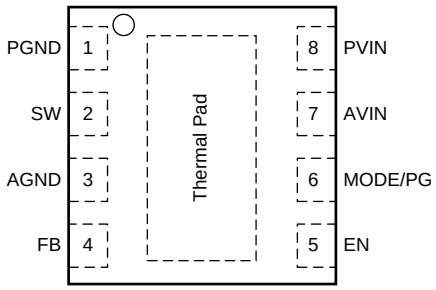

Pin Functions

PIN		TYPE	DESCRIPTION
NO.	NAME		
1	PGND	—	GND supply pin for the output stage.
2	SW	OUT	This is the switch pin and is connected to the internal MOSFET switches. Connect the external inductor between this terminal and the output capacitor.
3	AGND	—	Analog GND supply pin for the control circuit.
4	FB	IN	Feedback pin for the internal regulation loop. Connect the external resistor divider to this pin. In case of fixed output voltage option, connect this pin directly to the output capacitor
5	EN	IN	This is the enable pin of the device. Pulling this pin to low forces the device into shutdown mode. Pulling this pin to high enables the device. This pin must be terminated
6	MODE/PG	IN	**MODE**: MODE pin = high forces the device to operate in fixed frequency PWM mode. MODE pin = low enables the power save mode with automatic transition from PFM mode to fixed frequency PWM mode. This pin must be terminated. (TPS62065-Q1)
		Open Drain	**PG**: Power Good open-drain output. Connect an external pullup resistor to a rail which is below or equal AVIN. (TPS62067-Q1)
7	AVIN	IN	Analog V_{IN} power supply for the control circuit must be connected to PVIN and input capacitor.
8	PVIN	PWR	V_{IN} power supply pin for the output stage.
—	Thermal Pad	—	For good thermal performance, this pad must be soldered to the land pattern on the PCB. This pad should be used as device GND.

Copyright © 2015, Texas Instruments Incorporated

8 Specifications

8.1 Absolute Maximum Ratings

over operating junction temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Voltage (2)	AVIN, PVIN	–0.3	7	V
	EN, MODE/PG, FB	–0.3	V_{IN} + 0.3 < 7	
	SW	–0.3	7	
Current (sink)	into PG		1	mA
Current (source)	Peak output	Internally limited		A
Junction temperature, T_J		–40	150	°C
Storage temperature, T_{stg}		–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) All voltage values are with respect to network ground terminal.

8.2 ESD Ratings

				VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per AEC Q100-002(1)		±2500	V
		Charged device model (CDM), per AEC Q100-011	Corner pins (1, 4, 5, and 8)	±750	
			Other pins	±500	

(1) AEC Q100-002 indicates HBM stressing is done in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

8.3 Recommended Operating Conditions

		MIN	NOM	MAX	UNIT
AV_{IN} , PV_{IN}	Supply voltage	2.9		6	V
	Output current capability			2000	mA
	Output voltage range for adjustable voltage	0.8		VIN	V
L	Effective Inductance Range	0.7	1	1.6	µH
C_{OUT}	Effective Output Capacitance Range	4.5	10	22	µF
T_J	Operating junction temperature	–40		125	°C

8.4 Thermal Information

THERMAL METRIC(1)		DSG (WSON) 8 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	64.78	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	80.60	
$R_{\theta JB}$	Junction-to-board thermal resistance	34.63	
ψ_{JT}	Junction-to-top characterization parameter	1.65	
ψ_{JB}	Junction-to-board characterization parameter	35.02	
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	6.61	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

Copyright © 2015, Texas Instruments Incorporated

8.5 Electrical Characteristics

Over operating junction temperature range (T_J = –40°C to 125°C), typical values are at T_J = 25°C. Unless otherwise noted, specifications apply for condition V_{IN} = EN = 3.6 V. External components C_{IN} = 10 µF 0603, C_{OUT} = 10 µF 0603, L = 1 µH.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY						
V_{IN}	Input voltage range		2.9		6	V
I_Q	Operating quiescent current	I_{OUT} = 0 mA, device operating in PFM mode and not device not switching		18		µA
I_{SD}	Shutdown current	EN = GND, current into AVIN and PVIN combined		0.1	5	µA
V_{UVLO}	Undervoltage lockout threshold	Falling	1.73	1.78	1.83	V
		Rising	1.9	1.95	1.99	
ENABLE, MODE						
V_{IH}	High level input voltage	2.9 V ≤ V_{IN} ≤ 6 V	1		6	V
V_{IL}	Low level input voltage	2.9 V ≤ V_{IN} ≤ 6 V	0		0.4	V
I_{IN}	Input bias current	EN, Mode tied to GND or AVIN		0.01	1	µA
POWER GOOD OPEN DRAIN OUTPUT						
V_{THPG}	Power good threshold voltage	Rising feedback voltage	93%	95%	98%	
		Falling feedback voltage	87%	90%	92%	
V_{OL}	Output low voltage	I_{OUT} = –1 mA; must be limited by external pullup resistor (1)			0.3	V
I_{LKG}	Leakage current into PG pin	$V_{(PG)}$ = 3.6 V			100	nA
t_{PGDL}	Internal power good delay time			5		µs
POWER SWITCH						
$R_{DS(on)}$	High-side MOSFET on-resistance	V_{IN} = 3.6 V (1)		120	180	mΩ
		V_{IN} = 5 V (1)		95	150	
$R_{DS(on)}$	Low-side MOSFET on-resistance	V_{IN} = 3.6 V (1)		90	130	mΩ
		V_{IN} = 5 V (1)		75	100	
I_{LIMF}	Forward current limit MOSFET high-side and low-side	2.9 V ≤ V_{IN} ≤ 6 V	2300	2750	3300	mA
T_{SD}	Thermal shutdown	Increasing junction temperature		150		°C
	Thermal shutdown hysteresis	Decreasing junction temperature		10		
OSCILLATOR						
f_{SW}	Oscillator frequency	2.9 V ≤ V_{IN} ≤ 6 V	2.6	3	3.4	MHz
OUTPUT						
V_{ref}	Reference voltage			600		mV
$V_{FB(PWM)}$	Feedback voltage PWM Mode	PWM operation, MODE = V_{IN} , 2.9 V ≤ V_{IN} ≤ 6 V, 0-mA load	–1.5%	0%	1.5%	
$V_{FB(PFM)}$	Feedback voltage PFM mode, Voltage Positioning	device in PFM mode, voltage positioning active (2)		1%		
V_{FB}	Load regulation			–0.5		%/A
	Line regulation			0		%/V
$R_{(Discharge)}$	Internal discharge resistor	Activated with EN = GND, 2.9 V ≤ V_{IN} ≤ 6 V, 0.8 ≤ V_{OUT} ≤ 3.6 V	75	200	1450	Ω
t_{START}	Start-up time	Time from active EN to reach 95% of V_{OUT}		500		µs

(1) Maximum value applies for T_J = 85°C
(2) In PFM mode, the internal reference voltage is set to typ. 1.01 × V_{ref}. See the parameter measurement information.

Copyright © 2015, Texas Instruments Incorporated

8.6 Typical Characteristics

Table 1. Table of Graphs

		FIGURE
Shutdown Current	Input Voltage and Ambient Temperature	Figure 1
Quiescent Current	Input Voltage	Figure 2
Oscillator Frequency	Input Voltage	Figure 3
Static Drain-Source On-State Resistance	Input Voltage, Low-Side Switch	Figure 4
	Input Voltage, High-Side Switch	Figure 5
$R_{DISCHARGE}$	Input Voltage vs. V_{OUT}	Figure 6

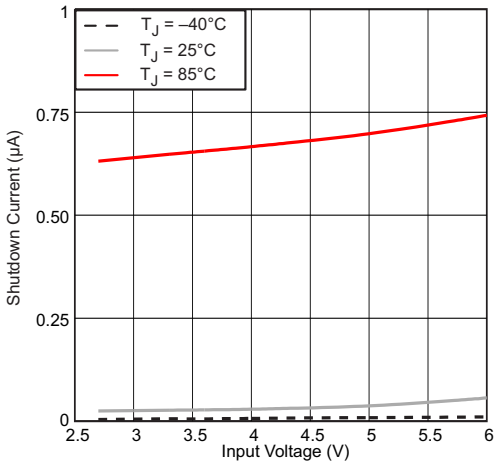


Figure 1. Shutdown Current vs Input Voltage and Ambient Temperature

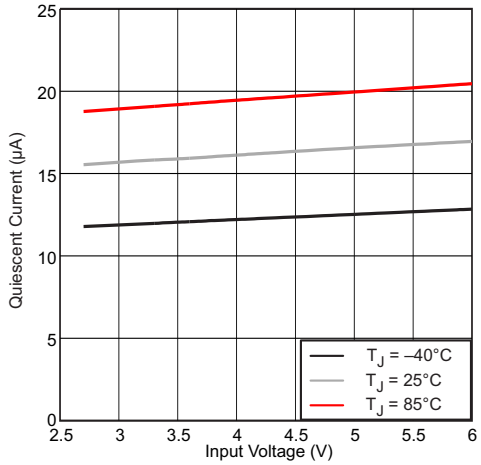


Figure 2. Quiescent Current vs Input Voltage


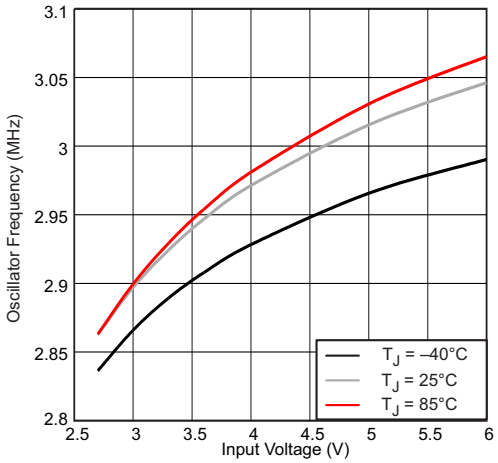



Figure 3. Oscillator Frequency vs Input Voltage

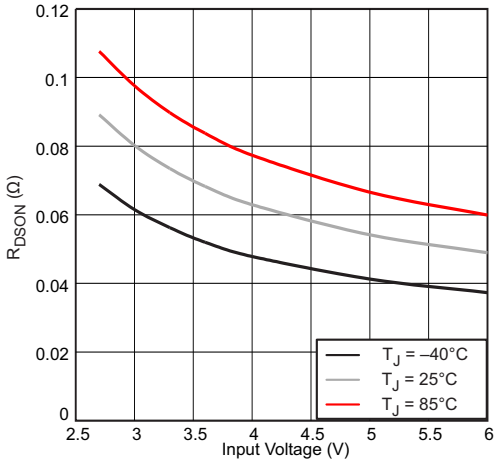

Low-Side Switch

Figure 4. Static Drain-Source On-State Resistance vs Input Voltage

Copyright © 2015, Texas Instruments Incorporated

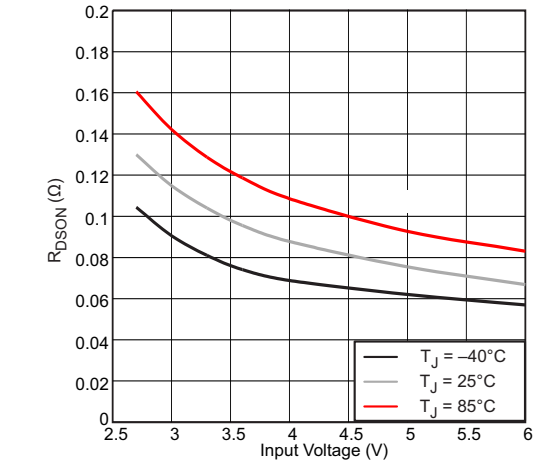

High-Side Switch

Figure 5. Static Drain-Source On-State Resistance vs Input Voltage


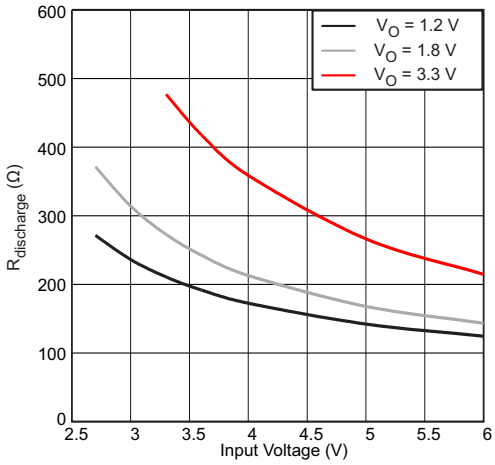


Figure 6. $R_{DISCHARGE}$ vs Input Voltage

9 Parameter Measurement Information

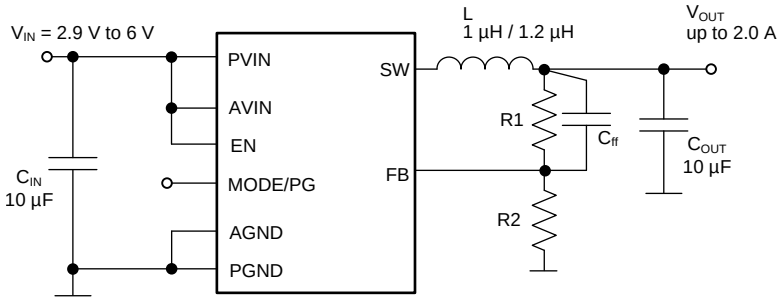

L: LQH44PN1R0NP0, L = 1 µH,Murata, NRG4026T1R2, L = 1.2 µH, Taiyo Yuden

C_{IN}/C_{OUT}: GRM188R60J106U, Murata 0603 size

10 Detailed Description


10.1 Overview

The TPS62065-Q1 and TPS62067-Q1 step-down converter operates with 3-MHz (typical) fixed-frequency pulse-width modulation (PWM) at moderate to heavy load currents. At light load currents the converter can automatically enter power save mode and then operate in pulse-frequency mode (PFM).

During PWM operation the converter uses an unique fast-response voltage-mode controller scheme with input-voltage feed-forward to achieve good line and load regulation which allows the use of small ceramic input and output capacitors. At the beginning of each clock cycle initiated by the clock signal, the high-side MOSFET switch is turned on. The current flows from the input capacitor through the high-side MOSFET switch through the inductor to the output capacitor and load. During this phase, the current ramps up until the PWM comparator trips and the control logic turns off the switch. The current-limit comparator also turns off the switch in case the current-limit of the high-side MOSFET switch is exceeded. After a dead time preventing shoot-through current, the low-side MOSFET rectifier is turned on and the inductor current ramps down. The current flows now from the inductor to the output capacitor and to the load. The current returns back to the inductor through the low-side MOSFET rectifier.

The next cycle is initiated by the clock signal again turning off the low-side MOSFET rectifier and turning on the high-side MOSFET switch.

10.2 Functional Block Diagram

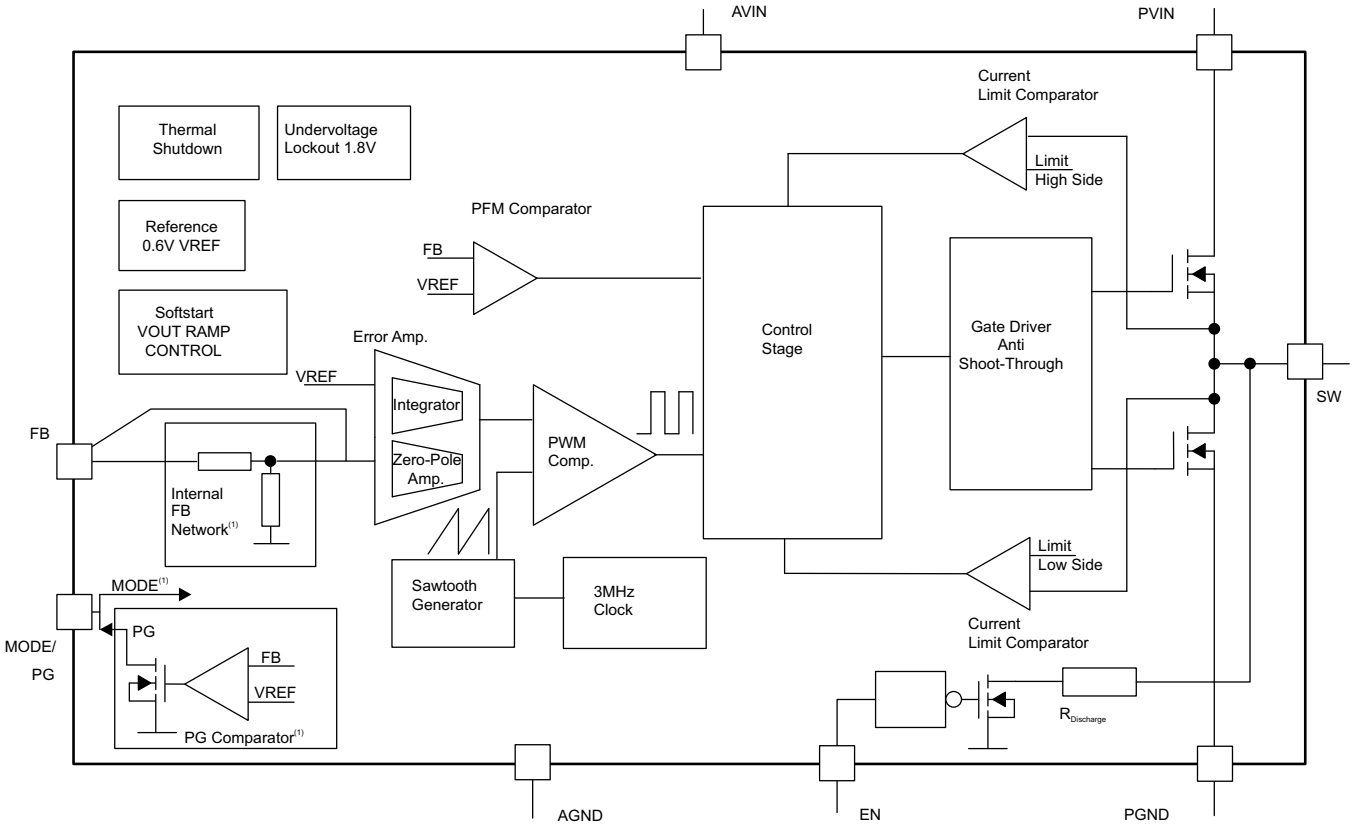

(1) Function depends on device option.

Copyright © 2015, Texas Instruments Incorporated

10.3 Feature Description

10.3.1 Mode Selection (TPS62065-Q1)

The MODE pin allows mode selection between forced PWM mode and power save mode.

Connecting this pin to GND enables the power save mode with automatic transition between PWM and PFM mode. Pulling the MODE pin high forces the converter to operate in fixed frequency PWM mode even at light load currents which allows simple filtering of the switching frequency for noise-sensitive applications. In this mode, the efficiency is lower compared to when the device is in power save mode during light loads.

The condition of the MODE pin can be changed during operation and allows efficient power management by adjusting the operation mode of the converter to the specific system requirements.

For the TPS62067-Q1 where the MODE pin is replaced with power good output, the power save mode is enabled per default.

10.3.2 Power-Good (PG) Output (TPS62067-Q1)

This function is available in the TPS62067-Q1 device only. The PG output is an open-drain output and requires an external pullup resistor. The circuit is active once the device is enabled and AVIN is above the UVLO threshold V_{UVLO}. The PG output provides a high level once the feedback voltage exceeds 95% (typical) of the nominal value. The PG output is driven to a low level when the feedback voltage falls below 90% (typical) of the nominal value. The PG output is activated with an internal delay of 5 µs.

The PG open-drain output transistor turns on immediately with the EN pin meets the low level and pulls the output low. The external pullup resistor can be connected to any voltage rail lower or equal the voltage applied to AVIN pin of the device. The value of the pullup resistor must be carefully selected in order to limit the current into the PG pin to 1 mA maximum. The external pullup resistor can be connected to VOUT or another voltage rail which does not exceed the VIN level. The current flowing through the pullup resistor impacts the current consumption of the application circuit in shutdown mode.

The shut down current of the device does not include the current through the external pullup and internal open-drain stage. The PG signal can be used for sequencing various converters or to reset a microcontroller.

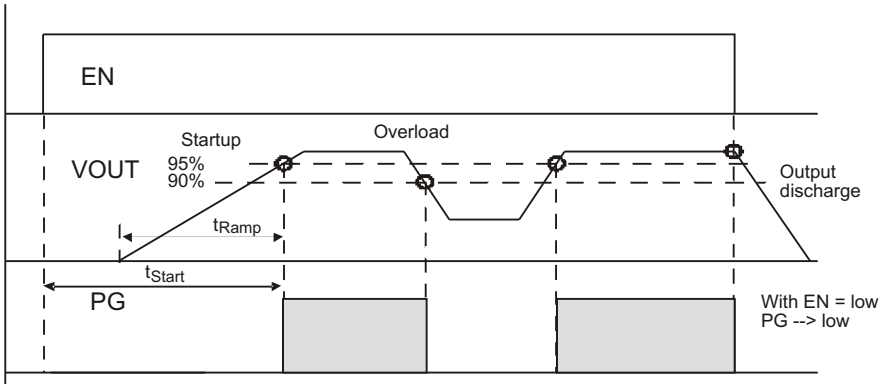


Figure 7. Power Good Output PG

10.3.3 Enable

Setting the EN pin high enables the device. At first, the internal reference is activated and the internal analog circuits are settled. Afterwards, the soft start is activated and the output voltage is ramped up. The output voltage reaches 95% of the nominal value within t_{START} which is 500 µs (typical) after the device has been enabled. The EN input can be used to control power sequencing in a system with various DC-DC converters. The EN pin can connect to the output of another converter in order to drive the EN pin high and get a sequencing of supply rails. When EN is pulled low the device enters shutdown mode. In this mode, all circuits are disabled and the SW pin is connected to PGND through an internal resistor to discharge the output.

Copyright © 2015, Texas Instruments Incorporated

Feature Description (continued)

10.3.4 Soft Start

The TPS62065-Q1 and TPS62067-Q1 device has an internal soft-start circuit that controls the ramp up of the output voltage. When the converter is enabled and the input voltage is above the UVLO threshold, V_{UVLO}, the output voltage ramps up from 5% to 95% of the nominal value with t_{Ramp} of 250 µs (typical). The ramp time limits the inrush current in the converter during start up and prevents possible input voltage drops when a battery or high impedance power source is used.

During soft start, the switch current-limit is reduced to 1/3 of the nominal value, I_{LIMF}, until the output voltage reaches 1/3 of the nominal value. When the output voltage trips this threshold, the device operates with the nominal current limit, I_{LIMF}.

10.3.5 Internal Current-Limit and Foldback Current-Limit For Short-Circuit Protection

During normal operation the high-side and low-side MOSFET switches are protected by the current-limit I_{LIMF}. When the high-side MOSFET switch reaches the current-limit, it turns off and the low-side MOSFET switch turns on. The high-side MOSFET switch can only turn on again when the current in the low-side MOSFET switch decreases below I_{LIMF}. The device is capable to provide peak-inductor currents up to the internal current limit, ILIMF.·

As soon as the switch current-limits are met and the output voltage falls below 1/3 of the nominal output voltage because of overload or short circuit condition, the foldback current-limit is enabled. In this case the switch current-limit is reduced to 1/3 of the nominal value I_{LIMF}.

Because the short-circuit protection is enabled during start-up, the device does not deliver more than 1/3 of the nominal current-limit, I_{LIMF}, until the output voltage exceeds 1/3 of the nominal output voltage. This protection must be considered when a load is connected to the output of the converter, which acts as a current sink.

10.3.6 Clock Dithering

In order to reduce the noise level of switch-frequency harmonics in the higher RF bands, the TPS62065-Q1 and TPS62067-Q1 device has a built-in clock-dithering circuit. The oscillator frequency is slightly modulated with a sub clock causing a clock dither of 6 ns (typical).

10.3.7 Thermal Shutdown

As soon as the junction temperature, T_J, exceeds 150°C (typical) the device enters thermal shutdown. In this mode, the high-side and low-side MOSFETs are turned off. The device continues operation with a soft start once the junction temperature falls below the thermal shutdown hysteresis.

10.4 Device Functional Modes

10.4.1 Power Save Mode

At TPS62065-Q1 pulling the MODE pin low enables power save mode. In TPS62067-Q1 power-save mode is enabled per default. If the load current decreases, the converter enters power save mode operation automatically. During power save mode the converter skips switching and operates with reduced frequency in PFM mode with a minimum quiescent current to maintain high efficiency. The converter positions the output voltage 1% (typical) above the nominal output voltage. This voltage positioning feature minimizes voltage drops caused by a sudden load step.

The transition from PWM mode to PFM mode occurs when the inductor current in the low-side MOSFET switch becomes zero, which indicates discontinuous conduction mode.

During the power save mode the output voltage is monitored with a PFM comparator. As the output voltage falls below the PFM comparator threshold of $V_{OUTnominal}$ +1%, the device starts a PFM current pulse. For this the high-side MOSFET switch turns on and the inductor current ramps up. After the on-time expires, the switch is turned off and the low-side MOSFET switch is turned on until the inductor current becomes zero.

The converter effectively delivers a current to the output capacitor and the load. If the load is below the delivered current the output voltage rises. If the output voltage is equal or higher than the PFM comparator threshold, the device stops switching and enters a sleep mode with a typical 18-µA current consumption.

Copyright © 2015, Texas Instruments Incorporated

Device Functional Modes (continued)

In case the output voltage is still below the PFM comparator threshold, further PFM current pulses are generated until the PFM comparator reaches its threshold. The converter starts switching again once the output voltage drops below the PFM comparator threshold due to the load current.

In case the output current can no longer be supported in PFM mode, the device exits PFM mode and enters PWM mode.

10.4.1.1 Dynamic Voltage Positioning

This feature reduces the voltage under or overshoots at load steps from light to heavy load and vice versa. It is active in power save mode and regulates the output voltage 1% higher than the nominal value. This provides more headroom for both the voltage drop at a load step, and the voltage increase at a load throw-off.

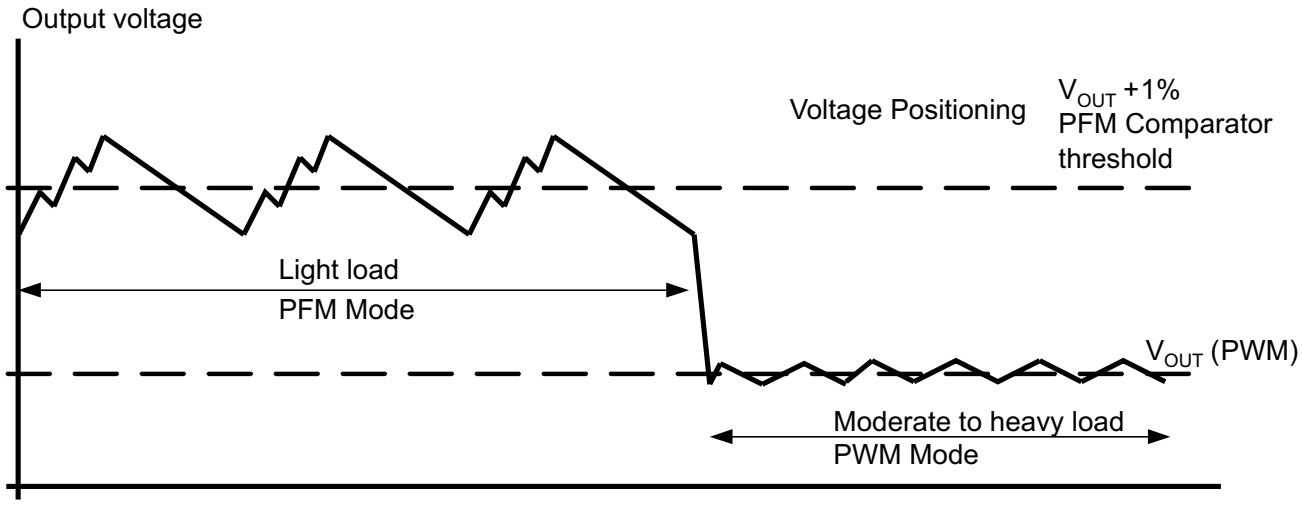


Figure 8. Power Save Mode Operation with automatic Mode transition

10.4.1.2 100% Duty-Cycle Low-Dropout Operation

The device starts to enter 100% duty cycle mode as the input voltage comes close to the nominal output voltage. In order to maintain the output voltage, the high-side MOSFET switch is turned on 100% for one or more cycles.

With further decreasing VIN the high-side MOSFET switch is turned on completely. In this case the converter offers a low input-to-output voltage difference. This is particularly useful in battery-powered applications to achieve longest operation time by taking full advantage of the whole battery voltage range.

The minimum input voltage to maintain regulation depends on the load current and output voltage, and can be calculated as:

$$V_{IN}min = V_O max + I_O max \times (R_{DS(on)} max + R_L) \quad (1)$$

where

- $I_O max$ = maximum output current
- $R_{DS(on)} max$ = maximum P-channel switch $R_{DS(on)}$
- R_L = DC resistance of the inductor
- $V_O max$ = nominal output voltage plus maximum output voltage tolerance

10.4.1.3 Undervoltage Lockout (UVLO)

The UVLO circuit prevents the device from malfunctioning at low input voltages and from excessive discharge of the battery. It disables the output stage of the converter once the falling VIN trips the UVLO threshold V_{UVLO}. The UVLO threshold V_{UVLO} for falling V_{IN} is typically 1.78 V. The device starts operation once the rising V_{IN} trips UVLO threshold V_{UVLO} again at typically 1.95 V.

Copyright © 2015, Texas Instruments Incorporated

Device Functional Modes (continued)

10.4.1.4 Output Capacitor Discharge

With EN pulled low, the device enters shutdown mode and all internal circuits are disabled. The SW pin is connected to PGND through an internal resistor to discharge the output capacitor. This feature ensures a startup in a discharged output capacitor once the converter is enabled again and prevents a floating charge on the output capacitor. The output voltage ramps up monotonic starting from 0 V.

Copyright © 2015, Texas Instruments Incorporated

11 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

11.1 Application Information

The TPS62065-Q1 and TPS62067-Q1 is a highly efficient synchronous 2-A step down DC-DC converter.

11.2 Typical Application

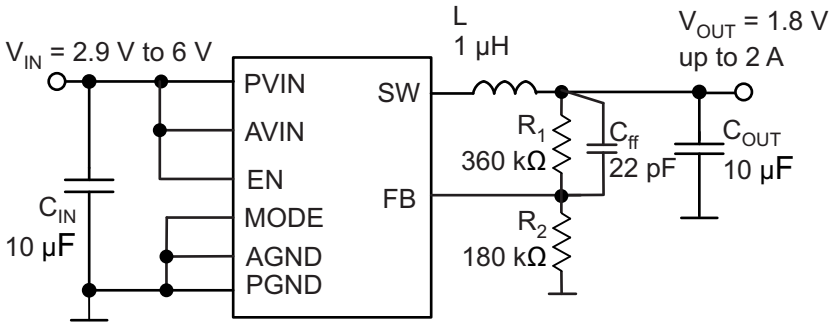


Figure 9. TPS62065-Q1 Adjustable 1.8-V Output-Voltage Configuration

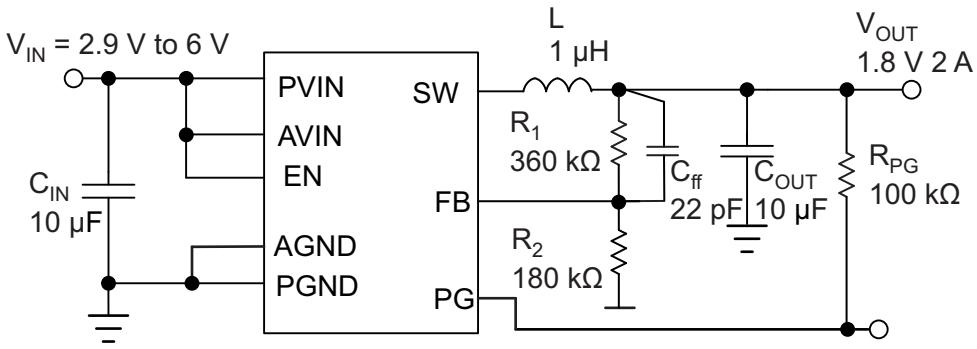


Figure 10. TPS62067-Q1 Adjustable 1.8-V Output-Voltage Configuration

11.2.1 Design Requirements

The device operates over an input voltage range from 2.9 V to 6 V. The output voltage is adjustable using an external feedback divider.

11.2.2 Detailed Design Procedure

11.2.2.1 Output Voltage Setting

The output voltage can be calculated to:

$$V_{OUT} = V_{REF} \times \left(1 + \frac{R_1}{R_2}\right) \qquad R_1 = \left(\frac{V_{OUT}}{V_{REF}} - 1\right) \times R_2 \tag{2}$$

with an internal reference voltage V_{REF} typically 0.6 V.

Typical Application (continued)

To minimize the current through the feedback divider network, R_2 should be within the range of 120 kΩ to 360 kΩ. The sum of R_1 and R_2 should not exceed ~1 MΩ, to keep the network robust against noise. An external feed-forward capacitor C_{ff} is required for optimum regulation performance. Lower resistor values can be used. R_1 and C_{ff} places a zero in the loop. The right value for C_{ff} can be calculated as:

$$f_z = \frac{1}{2 \times \pi \times R_1 \times C_{ff}} = 25 \text{ kHz} \quad (3)$$

$$C_{ff} = \frac{1}{2 \times \pi \times R_1 \times 25 \text{ kHz}} \quad (4)$$

11.2.2.2 Output Filter Design (inductor And Output Capacitor)

The internal compensation network of TPS62065-Q1 and TPS62067-Q1 is optimized for a LC output filter with a corner frequency of:

$$f_C = \frac{1}{2 \times \pi \times \left(\sqrt{1 \text{ µH} \times 10 \text{ µF}}\right)} = 50 \text{ kHz} \quad (5)$$

The part operates with nominal inductors of 1 µH to 1.2 µH and with 10-µF to 22-µF small X5R and X7R ceramic capacitors. Please refer to the lists of inductors and capacitors. The part is optimized for a 1-µH inductor and 10-µF output capacitor.

11.2.2.2.1 Inductor Selection

The inductor value has a direct effect on the ripple current. The selected inductor has to be rated for its DC resistance and saturation current. The inductor ripple current (ΔI_L) decreases with higher inductance and increases with higher V_I or V_O.

Equation 6 calculates the maximum inductor current in PWM mode under static load conditions. The saturation current of the inductor should be rated higher than the maximum inductor current as calculated with Equation 7. This is recommended because during heavy load transient the inductor current rises above the calculated value.

$$\Delta I_L = V_{OUT} \times \frac{1 - \frac{V_{OUT}}{V_{IN}}}{L \times f} \quad (6)$$

where

- ΔI_L = Peak-to-peak inductor ripple current
- L = Inductor value
- f = Switching frequency (3-MHz typical)

$$I_{L\max} = I_{OUT\max} + \frac{\Delta I_L}{2} \quad (7)$$

where

- I_{Lmax} = Maximum inductor current

A more conservative approach is to select the inductor current rating just for the switch current limit I_{LIMF} of the converter.

The total losses of the coil have a strong impact on the efficiency of the DC/DC conversion and consist of both the losses in the DC resistance $R_{(DC)}$ and the following frequency-dependent components:

- The losses in the core material (magnetic hysteresis loss, especially at high switching frequencies)
- Additional losses in the conductor from the skin effect (current displacement at high frequencies)
- Magnetic field losses of the neighboring windings (proximity effect)

Copyright © 2015, Texas Instruments Incorporated

Table 2. List of Inductors

DIMENSIONS [mm³]	INDUCTANCE µH	INDUCTOR TYPE	SUPPLIER
3,2 × 2,5 × 1 max	1	LQM32PN (MLCC)	Murata
3,7 × 4 × 1,8 max	1	LQH44 (wire wound)	Murata
4 × 4 × 2,6 max	1.2	NRG4026T (wire wound)	Taiyo Yuden
3,5 × 3,7 × 1,8 max	1.2	DE3518 (wire wound)	TOKO

11.2.2.2.2 Output Capacitor Selection

The advanced fast-response voltage mode control scheme of the TPS62065-Q1 and TPS62067-Q1 allows the use of tiny ceramic capacitors. Ceramic capacitors with low ESR values have the lowest output voltage ripple and are recommended. The output capacitor requires either an X7R or X5R dielectric. Y5V and Z5U dielectric capacitors, aside from their wide variation in capacitance over temperature, become resistive at high frequencies and may not be used. For most applications a nominal 10-µF or 22-µF capacitor is suitable. At small ceramic capacitors, the DC-bias effect decreases the effective capacitance. Therefore a 22-µF capacitor can be used for output voltages higher than 2 V, see list of capacitors.

In case additional ceramic capacitors in the supplied system are connected to the output of the DC/DC converter, the output capacitor C_{OUT} must be decreased in order not to exceed the recommended effective capacitance range. In this case a loop stability analysis must be performed as described later.

At nominal load current, the device operates in PWM mode and the RMS ripple current is calculated as:

$$I_{RMSCout} = V_{OUT} \times \frac{1 - \frac{V_{OUT}}{V_{IN}}}{L \times f} \times \frac{1}{2 \times \sqrt{3}} \quad (8)$$

11.2.2.2.3 Input Capacitor Selection

Because the buck converter has a pulsating input current, a low ESR input capacitor is required for best input voltage filtering and minimizing the interference with other circuits caused by high input voltage spikes. For most applications a 10-µF ceramic capacitor is recommended. The input capacitor can be increased without any limit for better input voltage filtering.

Take care when using only small ceramic input capacitors. When a ceramic capacitor is used at the input and the power is being supplied through long wires, such as from a wall adapter, a load step at the output or VIN step on the input can induce ringing at the V_{IN} pin. This ringing can couple to the output and be mistaken as loop instability or could even damage the part by exceeding the maximum ratings.

Table 3. List of Capacitors

CAPACITANCE	TYPE	SIZE [mm³]	SUPPLIER
10 µF	GRM188R60J106M	0603: 1,6 × 0,8 × 0,8	Murata
22 µF	GRM188R60G226M	0603: 1,6 × 0,8 × 0,8	Murata
22 µF	CL10A226MQ8NRNC	0603: 1,6 × 0,8 × 0,8	Samsung
10 µF	CL10A106MQ8NRNC	0603: 1,6 × 0,8 × 0,8	Samsung

11.2.2.3 Checking Loop Stability

The first step of circuit and stability evaluation is to look from a steady-state perspective at the following signal

- Switching node, SW
- Inductor current, I_L
- Output ripple voltage, $V_{OUT(AC)}$

These are the basic signals that need to be measured when evaluating a switching converter. When the switching waveform shows large duty cycle jitter or the output voltage or inductor current shows oscillations, the regulation loop may be unstable. This is often a result of board layout and/or wrong L-C output filter combinations. As a next step in the evaluation of the regulation loop, test the load transient response. The results are most easily interpreted when the device operates in PWM mode at medium to high load currents.


During this recovery time, V_{OUT} can be monitored for settling time, overshoot, or ringing; that helps evaluate stability of the converter. Without any ringing, the loop has usually more than 45° of phase margin.

Copyright © 2015, Texas Instruments Incorporated

11.2.3 Application Curves


Table 4. Table of Graphs

		FIGURE
η Efficiency	Load Current, V_{OUT} = 1.2 V, Auto PFM and PWM Mode, Linear Scale	Figure 11
	Load Current, V_{OUT} = 1.8 V, Auto PFM and PWM Mode, Linear Scale	Figure 12
	Load Current, V_{OUT} = 3.3 V, PFM and PWM Mode, Linear Scale	Figure 13
	Load Current, V_{OUT} = 1.8 V, Auto PFM and PWM Mode vs. Forced PWM Mode, Logarithmic Scale	Figure 14
Output Voltage Accuracy	Load Current, V_{OUT} = 1.8 V, Auto PFM and PWM Mode	Figure 15
	Load Current, V_{OUT} = 1.8 V, Forced PWM Mode	Figure 16
Typical Operation	PWM Mode, V_{IN} = 3.6 V, V_{OUT} = 1.8 V, 500 mA, L = 1.2 µH, C_{OUT} = 10 µF	Figure 17
	PFM Mode, V_{IN} = 3.6 V, V_{OUT} = 1.8 V, 20 mA, L = 1.2 µH, C_{OUT} = 10 µF	Figure 18
Load Transient	PWM Mode, V_{IN} = 3.6 V, V_{OUT} = 1.2 V, 0.2 mA to 1 A	Figure 19
	PFM Mode, V_{IN} = 3.6 V, V_{OUT} = 1.2 V, 20 mA to 250 mA	Figure 20
	V_{IN} = 3.6 V, V_{OUT} = 1.8 V, 200 mA to 1500 mA	Figure 21
Line Transient	PWM Mode, V_{IN} = 3.6 V to 4.2 V, V_{OUT} = 1.8 V, 500 mA	Figure 22
	PFM Mode, V_{IN} = 3.6 V to 4.2 V, V_{OUT} = 1.8 V, 500 mA	Figure 23
Startup into Load	V_{IN} = 3.6 V, V_{OUT} = 1.8 V, Load = 2.2 Ω	Figure 24
Startup TPS62067-Q1	Into 2.2-Ω Load with Power Good	Figure 25
Output Discharge	V_{IN} = 3.6 V, V_{OUT} = 1.8 V, No Load	Figure 26
Shutdown TPS62067-Q1	V_{IN} = 4.2 V, V_{OUT} = 3.3 V, No Load, PG Pullup Resistor 10 kΩ	Figure 27

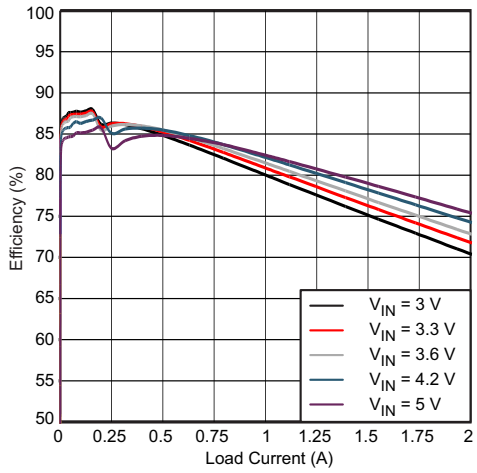

V_{OUT} = 1.2 V Linear Scale
L = 1.2 µH (NRG4026T 1R2) C_{OUT} = 10 µF (0603 size)


Figure 11. Efficiency vs Load Current Auto PFM and PWM MODE

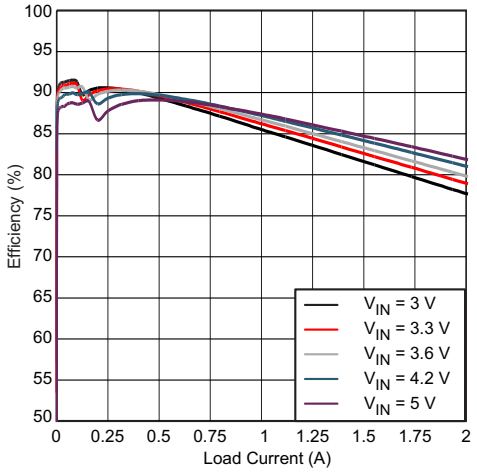

V_{OUT} = 1.8 V Linear Scale
L = 1.2 µH (NRG4026T 1R2) C_{OUT} = 10 µF (0603 size)


Figure 12. Efficiency vs Load Current PFM and PWM MODE

Copyright © 2015, Texas Instruments Incorporated

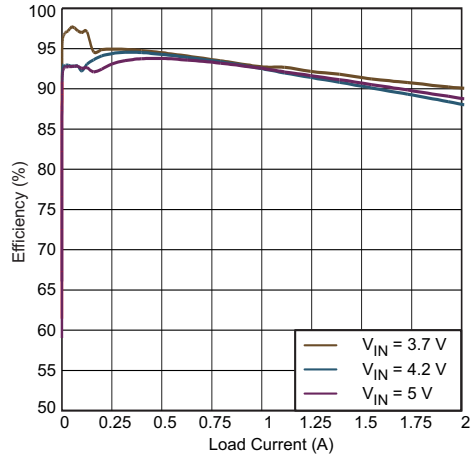


V_{OUT} = 3.3 V Linear Scale
L = 1.2 µH (NRG4026T 1R2) C_{OUT} = 22 µF (0603 size)

Figure 13. Efficiency vs Load Current Auto PFM and PWM MODE

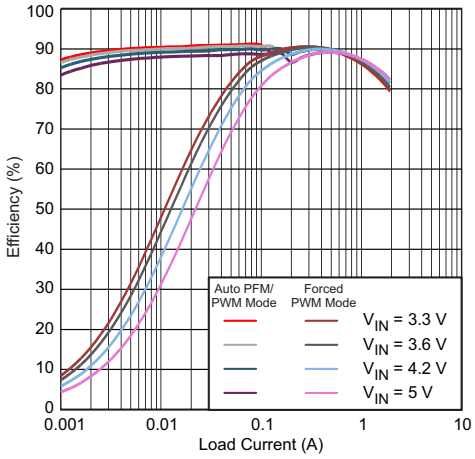


V_{OUT} = 1.8 V Logarithmic Scale
C_{OUT} = 10 µF (0603 size) L = 1.2 µH (NRG4026T 1R2)

Figure 14. Efficiency vs Load Current Auto PFM and PWM Mode vs. Forced PWM Mode

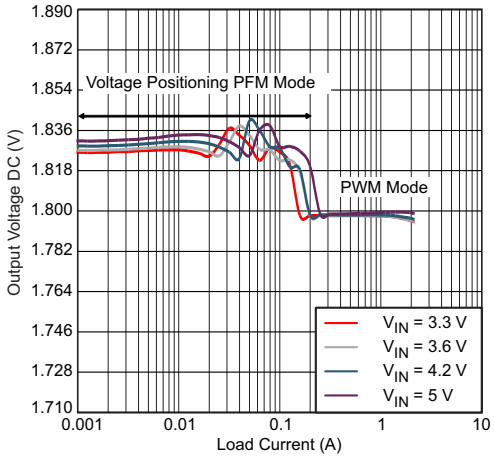


L = 1 µH V_{OUT} = 1.8 V C_{OUT} = 10 µF

Figure 15. Output Voltage Accuracy vs Load Current Auto PFM and PWM MODE

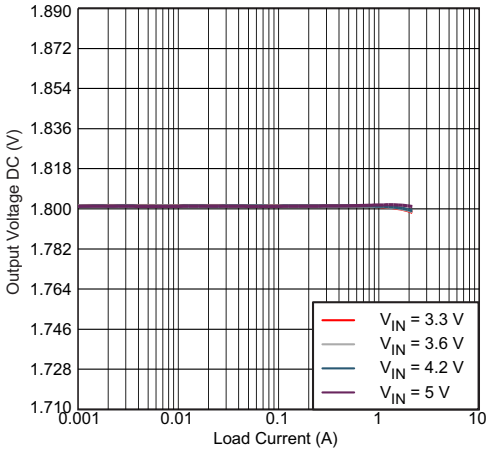


L = 1 µH V_{OUT} = 1.8 V C_{OUT} = 10 µF

Figure 16. Output Voltage Accuracy vs Load Current Forced PWM MODE

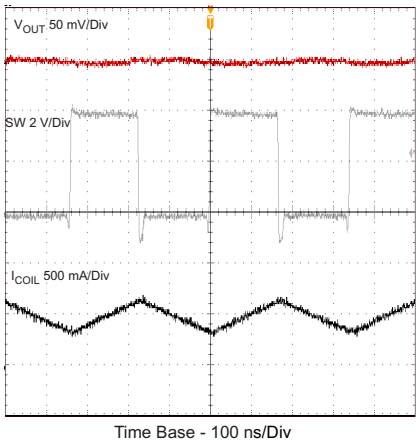

V_{IN} = 3.6 V V_{OUT} = 1.8 V MODE = GND
C_{OUT} = 10 µF L = 1.2 µH I_{OUT} = 500 mA


Figure 17. Typical Operation (PWM Mode)

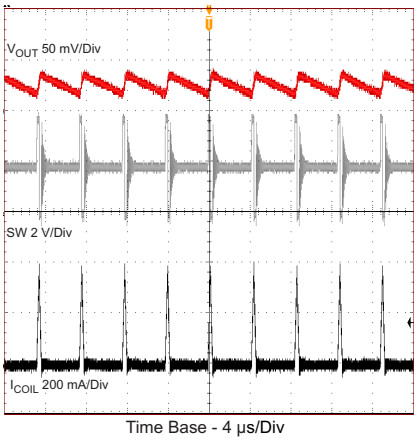

V_{IN} = 3.6 V V_{OUT} = 1.8 V MODE = GND
C_{OUT} = 10 µF L = 1.2 µH I_{OUT} = 20 mA


Figure 18. Typical Operation (PFM Mode)

Copyright © 2015, Texas Instruments Incorporated

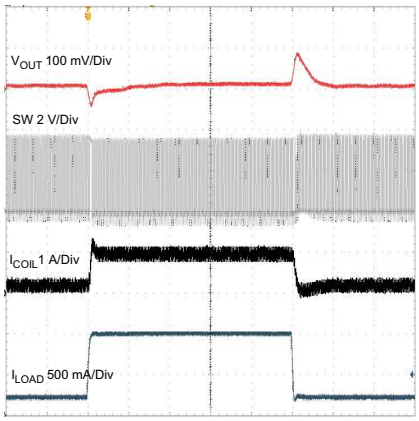


V_{IN} = 3.6 V V_{OUT} = 1.2 V I_{OUT} = 0.2 to 1 A

Figure 19. Load Transient Response, MODE = V_{IN} PWM Mode 0.2 A to 1 A

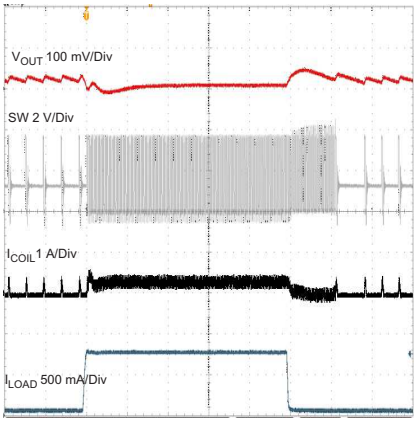


V_{IN} = 3.6 V V_{OUT} = 1.8 V I_{OUT} = 20 to 2500 mA

Figure 20. Load Transient PFM Mode 20 mA to 250 mA

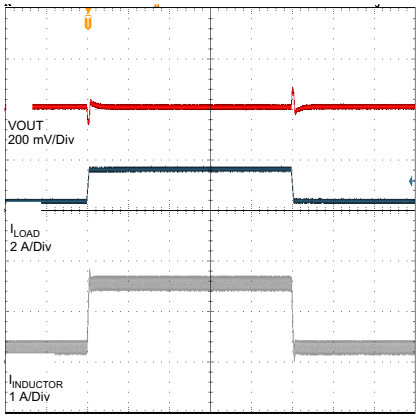


V_{IN} = 3.6 V V_{OUT} = 1.8 V L = 1.2 µH
C_{OUT} = 10 µF

Figure 21. Load Transient Response 200 mA To 1500 mA

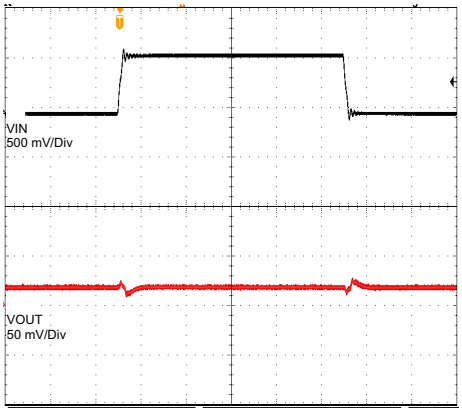


V_{IN} = 3.6 to 4.2 V V_{OUT} = 1.8 V I_{OUT} = 500 mA
C_{OUT} = 10 µF L = 1.2 µH

Figure 22. Line Transient Response PWM Mode

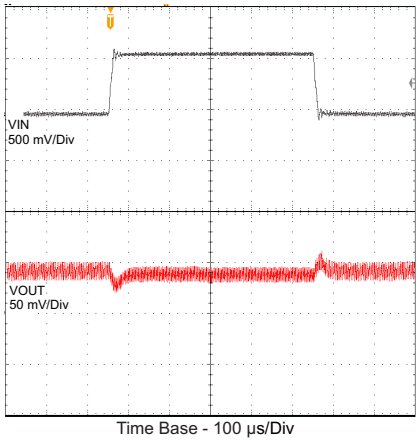

V_{IN} = 3.6 to 4.2 V V_{OUT} = 1.8 V I_{OUT} = 50 mA
C_{OUT} = 10 µF L = 1.2 µH


Figure 23. Line Transient PFM Mode

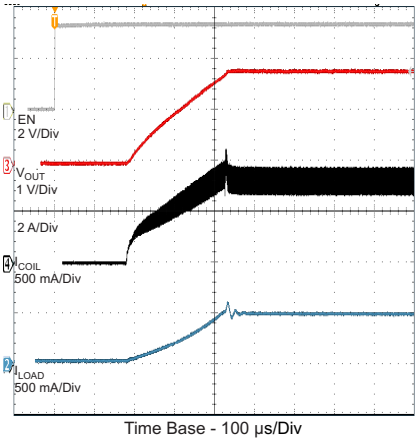

V_{IN} = 3.6 V V_{OUT} = 1.8 V Load = 2R2
C_{OUT} = 10 µF L = 1.2 µH


Figure 24. Startup Into Load

Copyright © 2015, Texas Instruments Incorporated

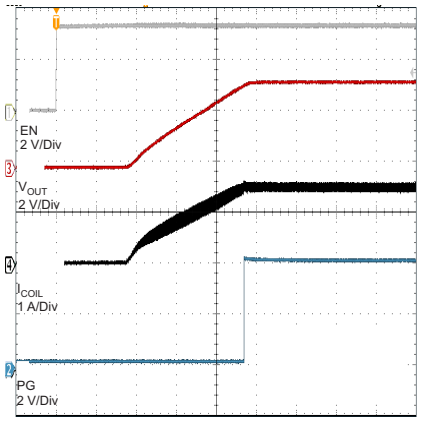


V_{IN} = 4.2 V V_{OUT} = 3.3 V Load = 2R2
PG Pullup resistor 10 kΩ

Figure 25. Startup TPS62067-Q1 into 2.2-Ω Load With Power Good

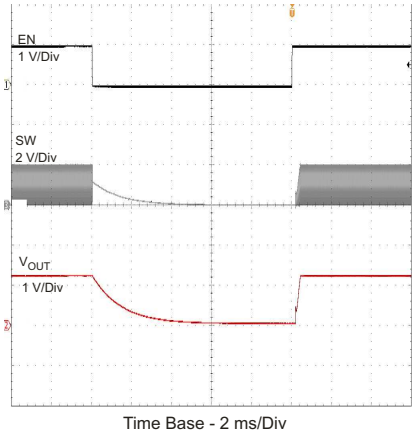

V_{IN} = 3.6 V V_{OUT} = 1.8 V No load
C_{OUT} = 1.8 µF

Figure 26. Output Discharge

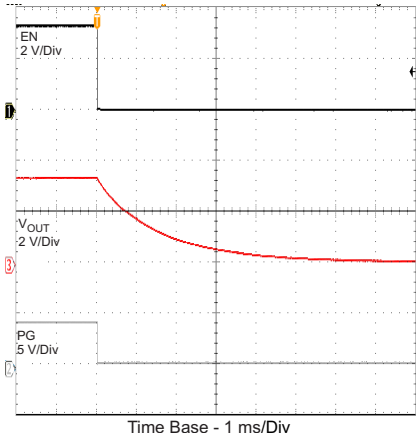

V_{IN} = 4.2 V V_{OUT} = 3.3 V No load
PG pullup resistor, 10 kΩ

Figure 27. Shutdown TPS62067-Q1

12 Power Supply Recommendations

The power supply to the TPS62065-Q1 and TPS62067-Q1 must have a current rating according to the supply voltage, output voltage, and output current of the TPS62065-Q1 and TPS62067-Q1.

Copyright © 2015, Texas Instruments Incorporated

13 Layout

13.1 Layout Guidelines

As for all switching power supplies, the layout is an important step in the design. The input capacitor needs to be placed as close as possible to the IC pins.

It is critical to provide a low inductance, impedance ground and supply path. Therefore, use wide and short traces for the main current paths. Connect the AGND and PGND pins of the device to the thermal pad land of the PCB and use this pad as a star point. Use a common power PGND node and a different node for the signal AGND to minimize the effects of ground noise. The FB divider network should be connected right to the output capacitor and the FB line must be routed away from noisy components and traces (for example, SW line).

Due to the small package of this converter and the overall small solution size the thermal performance of the PCB layout is important. To get a good thermal performance a four or more layer PCB design is recommended. The PowerPAD of the IC must be soldered on the thermal pad area on the PCB to get a proper thermal connection. For good thermal performance the exposed pad on the PCB must be connected to an inner GND plane with sufficient via connections. Please refer to the documentation of the evaluation kit.

13.2 Layout Example

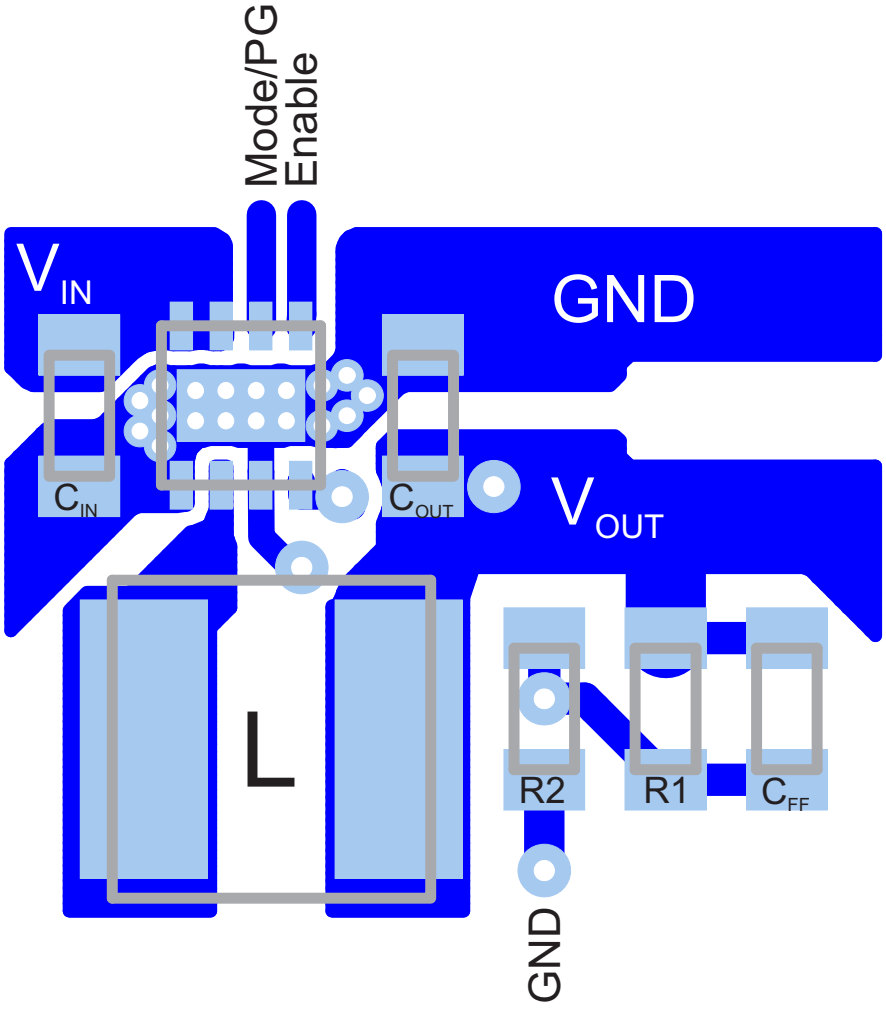


Figure 28. PCB Layout

Copyright © 2015, Texas Instruments Incorporated

14 Device and Documentation Support

14.1 Device Support

14.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

14.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

Table 5. Related Links

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
TPS62065-Q1	Click here	Click here	Click here	Click here	Click here
TPS62067-Q1	Click here	Click here	Click here	Click here	Click here

14.3 Trademarks

14.4 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

14.5 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

15 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2015, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS62065QDSGRQ1	ACTIVE	WSON	DSG	8	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 125	SJF	Samples
TPS62067QDSGRQ1	ACTIVE	WSON	DSG	8	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 125	SIP	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS62065-Q1, TPS62067-Q1 :


- Catalog: TPS62065, TPS62067

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

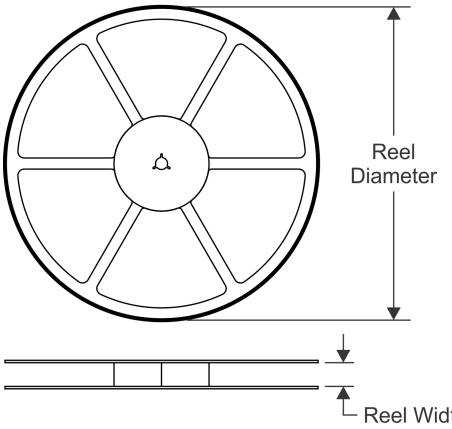


TAPE DIMENSIONS

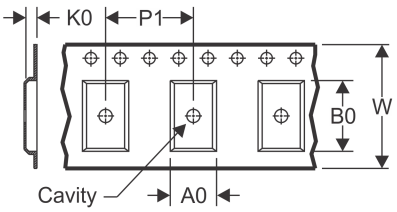

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

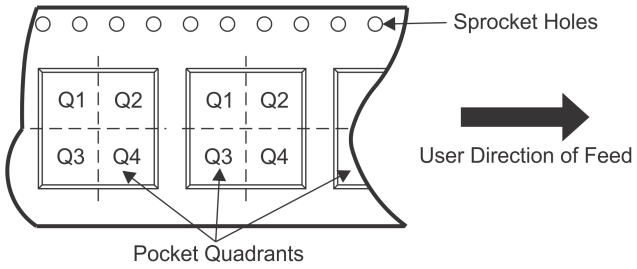

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS62065QDSGRQ1	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS62067QDSGRQ1	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2


TAPE AND REEL BOX DIMENSIONS

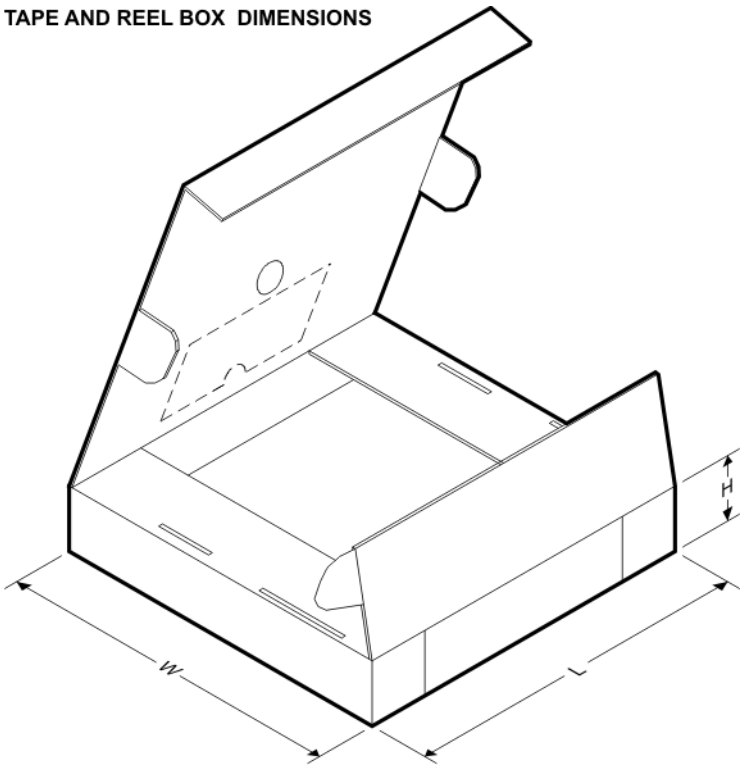

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS62065QDSGRQ1	WSON	DSG	8	3000	210.0	185.0	35.0
TPS62067QDSGRQ1	WSON	DSG	8	3000	210.0	185.0	35.0

DSG (S–PWSON–N8) PLASTIC SMALL OUTLINE NO–LEAD

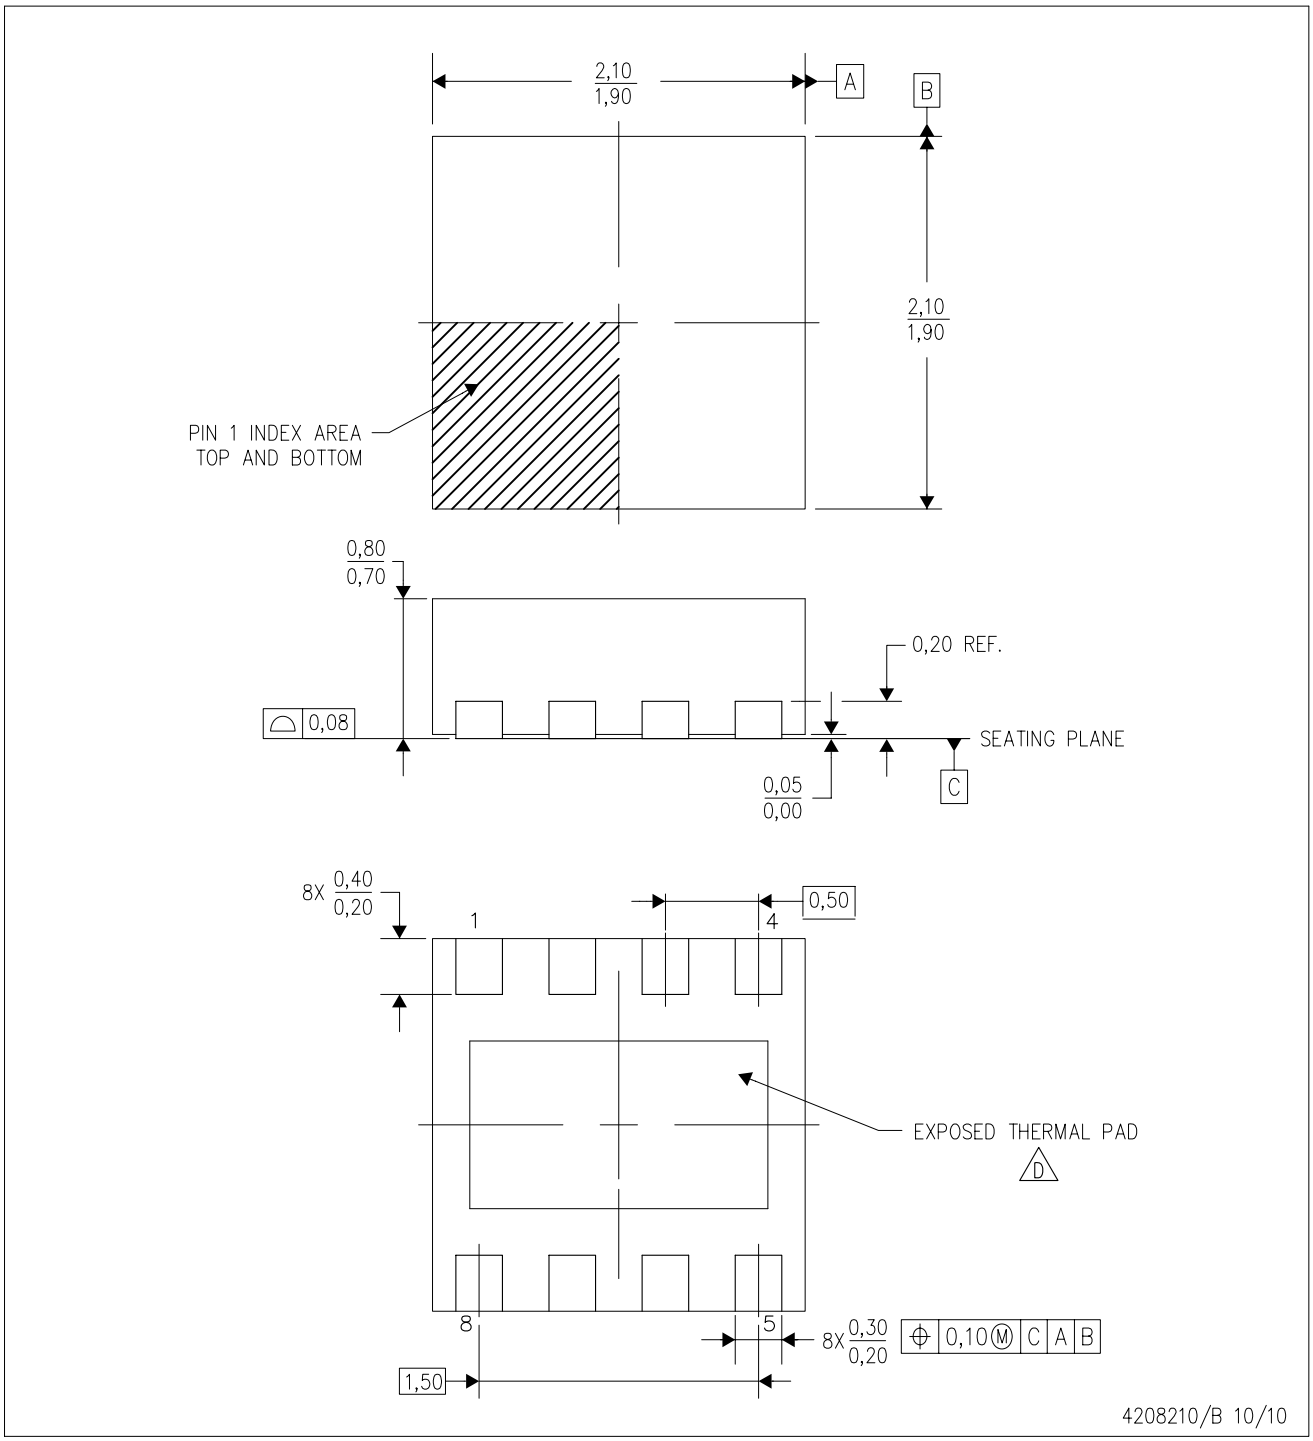

NOTES:
A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M–1994.
B. This drawing is subject to change without notice.
C. Quad Flatpack, No–Leads (QFN) package configuration.
D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
E. Falls within JEDEC MO–229.


DSG (S–PWSON–N8) PLASTIC SMALL OUTLINE NO–LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No–Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

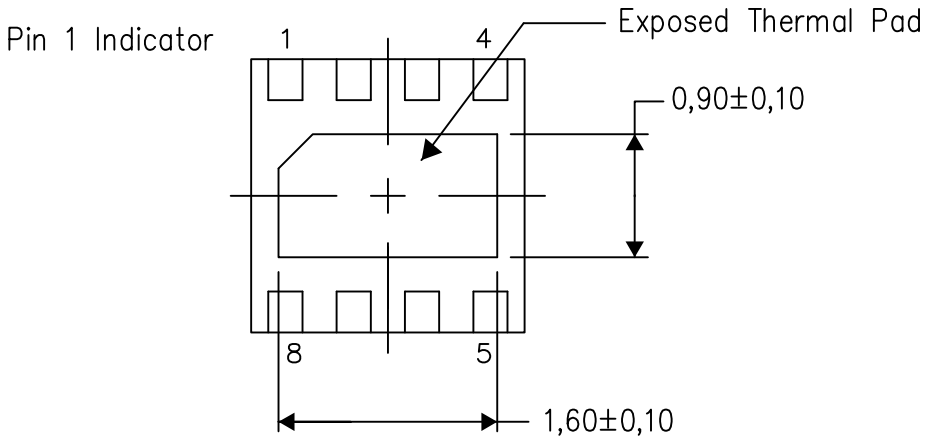


Bottom View

Exposed Thermal Pad Dimensions

4208347/G 08/13

NOTE: All linear dimensions are in millimeters

DSG (S–PWSON–N8) PLASTIC SMALL OUTLINE NO–LEAD

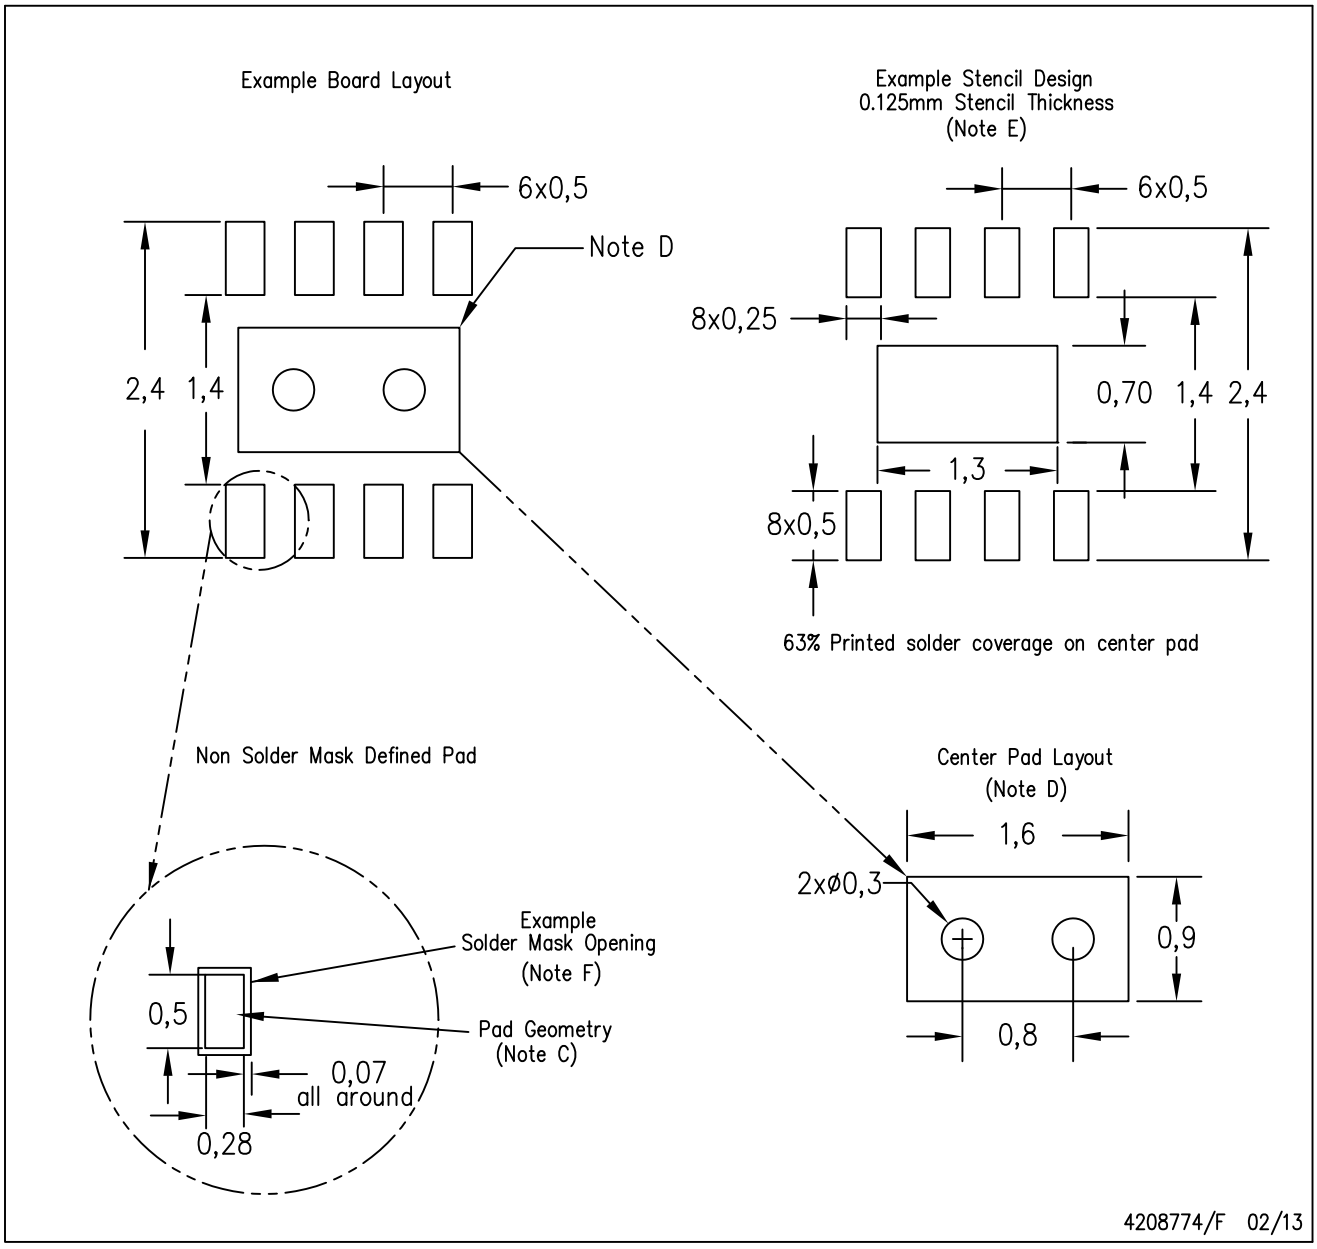

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <http://www.ti.com>.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
F. Customers should contact their board fabrication site for solder mask tolerances.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2015, Texas Instruments Incorporated