



TS-SG-01-X.X Drawing

**Note: Screw needs to be calibrated for a specific torque.
Use part numbers shown in the table below to order appropriate screw**

Top View

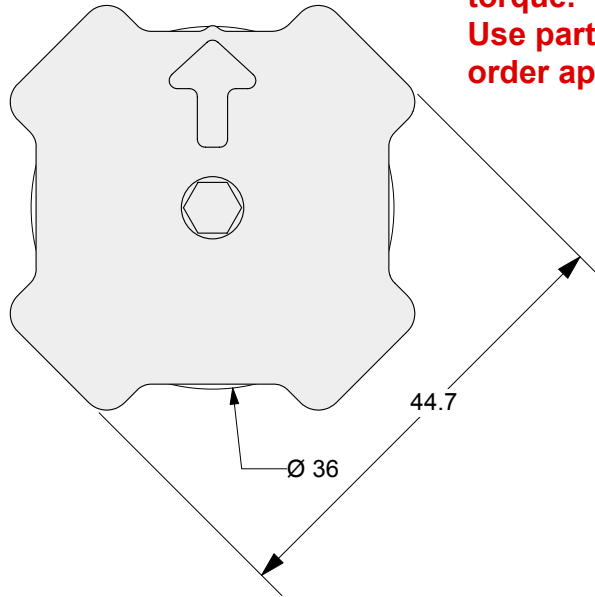


Side View

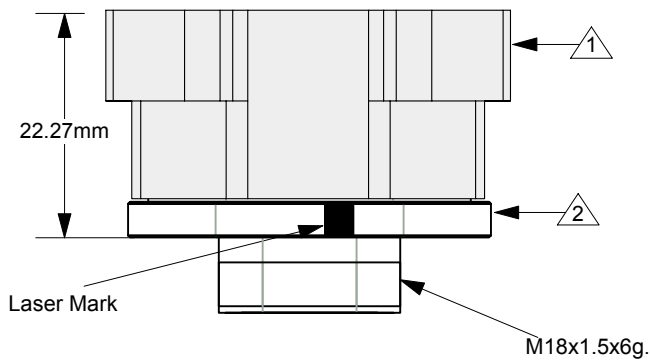

- 1 Compression Screw Top: Clear anodized Aluminum.
- 2 Compression Screw Bottom: Black anodized Aluminum M18 x1.5x6g Thread. 5mm Thread ht.

Description: Torque Indicating Screw
Torque screw for 3 in lbs -10 in lbs

To be used with swivel lid sockets.
Compression screw needs to be turned clockwise up to the point where the arrow on top of the compression screw aligns with laser mark on the compression screw bottom.

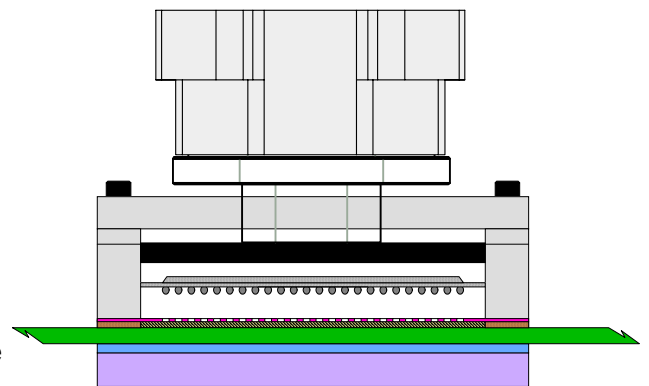

Swivel lid socket with Torque Indicating Screw

Tolerances: All tolerances are $\pm 0.13\text{mm}$ [$\pm 0.005"$] unless stated otherwise. Materials and specifications are subject to change without notice.

Ordering Information

Part Number	Torque (in. lbs)
TS-SG-01-3.0	3.0
TS-SG-01-3.5	3.5
TS-SG-01-4.0	4.0
TS-SG-01-4.5	4.5
TS-SG-01-5.0	5.0
TS-SG-01-5.5	5.5
TS-SG-01-6.0	6.0
TS-SG-01-6.5	6.5
TS-SG-01-7.0	7.0
TS-SG-01-7.5	7.5
TS-SG-01-8.0	8.0
TS-SG-01-8.5	8.5
TS-SG-01-9.0	9.0
TS-SG-01-9.5	9.5
TS-SG-01-10.0	10.0

TS-SG-01-X.X Drawing



© 2008 IRONWOOD ELECTRONICS, INC.
Tele: (952) 229-8200
www.ironwoodelectronics.com

Status: Released

Scale: N/A

Rev: C

Drawing: Vinayak R

Date: 5/7/08

File: TS-SG-01-X_X Dwg

Modified: 01/07/10