

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/7/04	


APPROVED: _____

DATE: _____ TITLE: _____


TSA-04




TSA-03




TSA-02




20.12 [.792]
20.0 [.787]

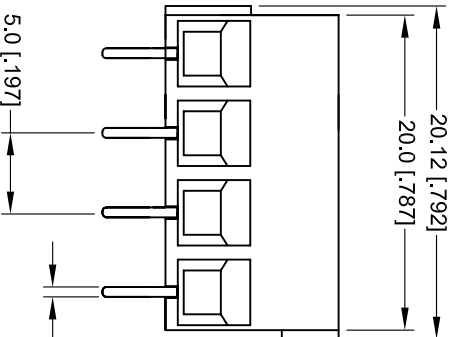

15.12 [.595]
15.0 [.591]

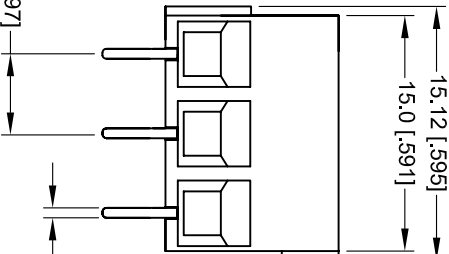

10.12 [.398]
10.0 [.394]

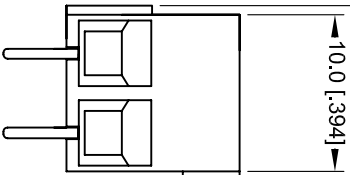


8.0 [.315]

11.0 [.433]

3.8 [.150]

1.0 [.039]



SPECIFICATIONS:

Material:

Insulator: Thermoplastic, Rated UL94V-0

Insulator color: Green

Terminals: Brass, Tin Plated

Screws: Steel, Zinc Plated.

Electrical:

Operation voltage: 300 VAC

Current rating: 10A

Insulation resistance: 500 Mohms @ 500 VDC.

Dielectric withstanding voltage: 2000 VAC / Min.

Wire Range:

16 To 22 Awg

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

MICRO BLOCK, 2 AND 3 POSITION

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
.X	± .10	ØX	± .10	ADAM TECH			
.XX	± .020	ØXX	± .015	909 Rahway Avenue, Union, NJ 07083			
.XXX	± .015	ØXXX	± .010	Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS				MICRO BLOCK, 2 AND 3 POSITION			
DATE							
DRAWN							
SS							
7/7/04							
CHECKED							
APPROVED							

A

B

C

D

A

B

C

D

6

5

4

3

2

1

6

5

4

3

2

1