Trimmer Potentiometer-6mm Ceramic

Suntan®

DISCONTINUED

TSR-655



玻 璃 釉 微 調 電 位 器

- 6mm Round/ Single-Turn/ Cermet Industrial/ Open Frame
- Cross slot adjustment options
- Horiontal andvertical mounting styles
- Dust resistant/ splash resistant covers
- PC board stand-offs and retention feature
- Front and top adjust styles

Electrical Characteristics	
Standard Resistance Range	100Ω to 1meg ohm (see standard resistance table)
Resistance Tolerance	±20% (TK±25%)
Adjustment Angle	240℃ ± 20℃
Residual Resistance	≤500Ω, 10Ω>500Ω, 2% (TK≤1KΩ, 2KΩ>1KΩ, 5%)

Environmental Characteristics	
Power Rating Max Working Voltage	100V
70℃	0.3Watt (TK0.1Watt)
Temperature Range	-30℃ to +85℃ (TK -10℃ to +70℃)
Temperature Coefficient	±250ppm/℃ (TK±1000 ppm/℃)
Rotational Life	±10% (TK±15%)
Load Life	500 hours 0.3Watt 70℃±5% (TK 240 hours 0.1Watt 50℃ +5%-20%)

Physical Characteristics	
Torque (Operating)	30~300gf. Cm
Stop Strength	0.5kgf. cm
Soldering Conditions	240℃ to 260℃ And within 3 seconds
Marking	Resistance Code
Standard Packing	500 PCS Per bag
Aqueous cleaning not recommended	

How to Order


TSR-655C --- 1 --- 101 -- R

- Model
- Style
- Resistance Code
- RoHS


Standard Resistance table

Resistance(Ohms)	Resistance Code
100	101
220	221
500	501
1,000	102
2,200	222
10,000	103
220,000	224
1,000,000	105


TSR-655C-1

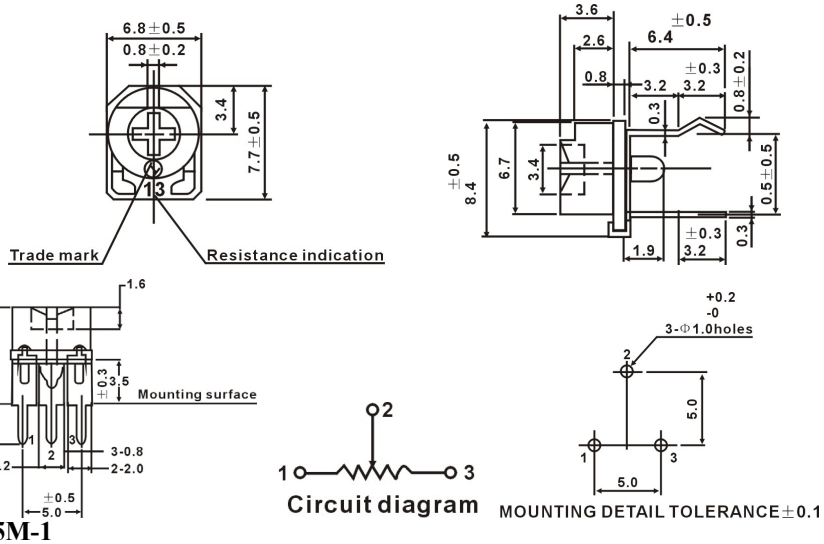

TSR-655M-1

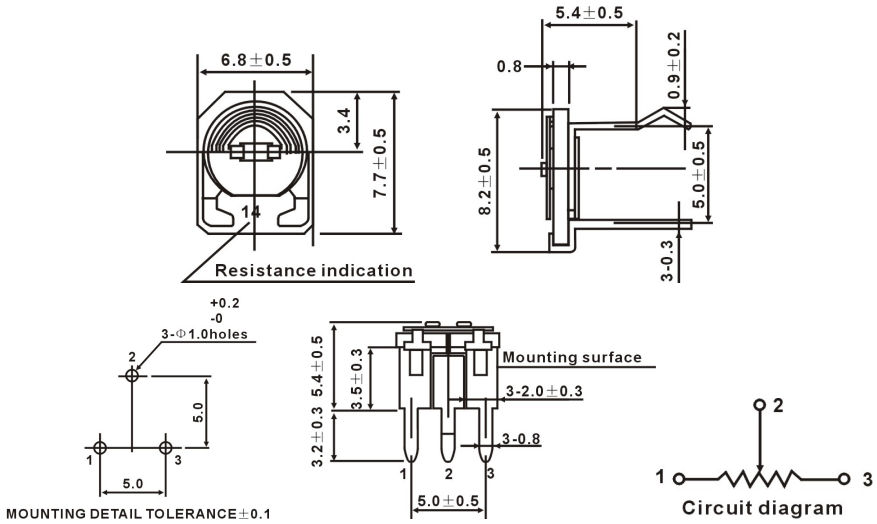

TSR-655M-S

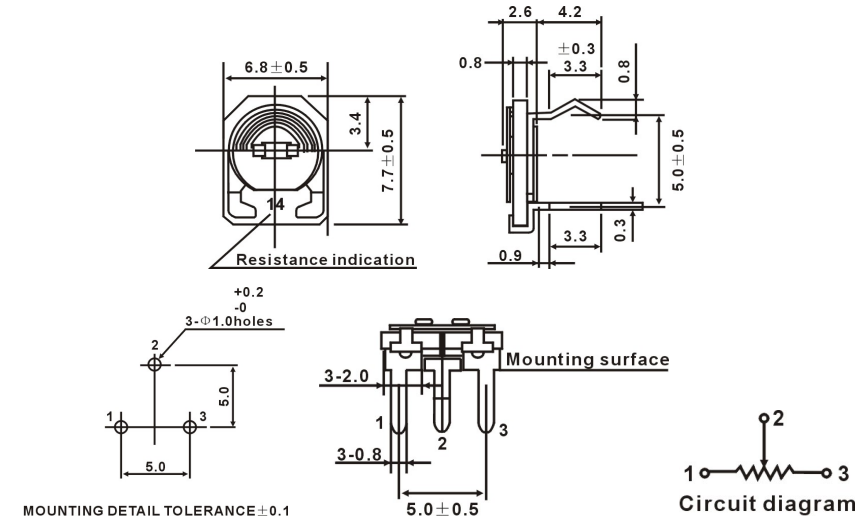

Note: Specification are subject to change without notice. For more detail and update, please visit our website.