

U74AHC4066

CMOS IC

QUADRUPLE BILATERAL ANALOG SWITCH



SOP-14



TSSOP-14

■ DESCRIPTION

The **U74AHC4066** is a quadruple bilateral analog switch which has 4 channels.

■ FEATURES

* Operate From 2V to 5.5V
* Max t_{PD} of 7ns at 5 V
* Low Power Dissipation: I_{CC}=20μA(Max)
* Low Input Current: $I_{I(L)}$=1μA(Max)


■ ORDERING INFORMATION

Ordering Number	Package	Packing
U74AHC4066G-S14-R	SOP-14	Tape Reel
U74AHC4066G-P14-R	TSSOP-14	Tape Reel

U74AHC4066G-S14-R


(1) Packing Type	(1) R: Tape Reel
(2) Package Type	(2) S14: SOP-14, P14: TSSOP-14
(3) Green Package	(3) G: Halogen Free and Lead Free

■ MARKING

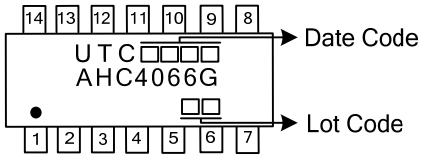

Copyright © 2014 Unisonic Technologies Co., Ltd

■ PIN CONFIGURATION

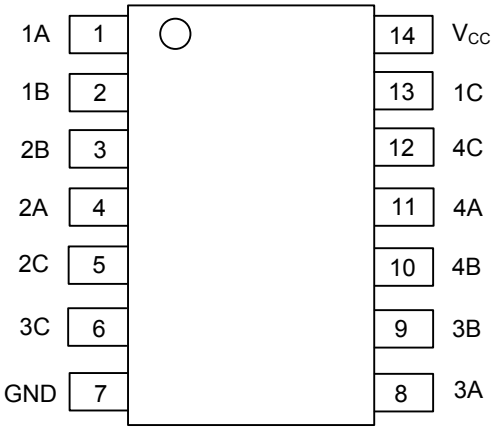


■ FUNCTION TABLE

INPUTS CONTROL (C)	SWITCH
H	ON
L	OFF

Note: H: HIGH voltage level;
L: LOW voltage level.

■ LOGIC DIAGRAM

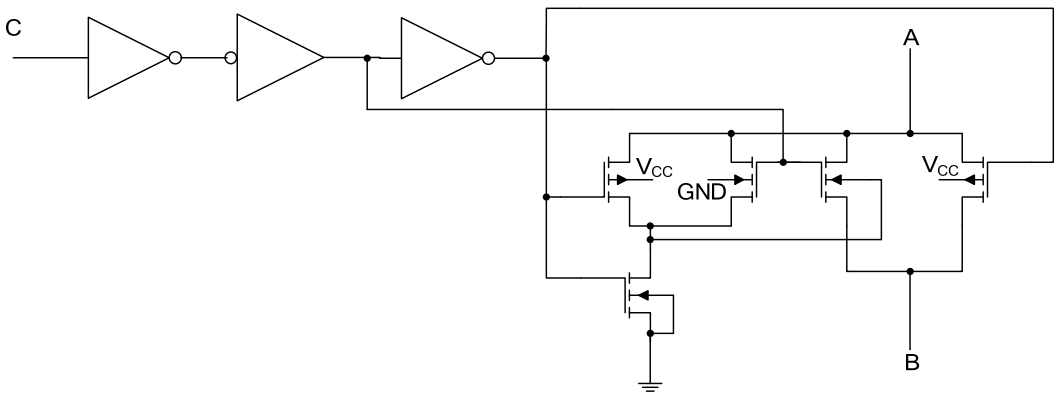

One Of Four Switches

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ +7	V
Input Voltage	V_{IN}	-0.5 ~ +7	V
Switch I/O Voltage	V_{IO}	-0.5 ~ V_{CC} +0.5	V
V_{CC} or GND Current	I_{CC}	±50	mA
Output Clamp Current	I_{OK}	±50	mA
Input Clamp Current	I_{IK}	-20	mA
On-State Switch Current	I_T	±25	mA
Operating Temperature	T_{OPR}	-40 ~ + 85	°C
Storage Temperature	T_{STG}	-65 ~ + 150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOP-14	θ_{JA}	86	°C/W
	TSSOP-14		113	°C/W

Note: The package thermal impedance is calculated in accordance with JESD 51-7.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2		5.5	V
High-Level Input Voltage	V_{IH}	V_{CC}=2V	1.5			V
		V_{CC}=2.3V to 2.7V	V_{CC} x 0.7			
		V_{CC}=3V to 3.6V	V_{CC} x 0.7			
		V_{CC}=4.5V to 5.5V	V_{CC} x 0.7			
Low-Level Input Voltage	V_{IL}	V_{CC}=2V			0.5	V
		V_{CC}=2.3V to 2.7V			V_{CC} x 0.3	
		V_{CC}=3V to 3.6V			V_{CC} x 0.3	
		V_{CC}=4.5V to 5.5V			V_{CC} x 0.3	
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input Transition Rise or Fall Rate	t_R / t_F	V_{CC}=2.3V to 2.7V			200	ns/V
		V_{CC}=3V to 3.6V			100	
		V_{CC}=4.5V to 5.5V			20	

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
On-state Switch Resistance	R_{ON}	I_T=-1mA, V_{IN}=GND or V_{CC}, V_C= V_{IH}	V_{CC}=2.3V		38	180	Ω
			V_{CC}=3V		29	150	
			V_{CC}=4.5V		21	75	
Peak On-state Resistance	$R_{ON(P)}$	I_T=-1mA, V_{IN}=GND to V_{CC}, V_C= V_{IH}	V_{CC}=2.3V		143	500	Ω
			V_{CC}=3V		57	180	
			V_{CC}=4.5V		31	100	
Difference In On-state Resistance Between Switches	ΔR_{ON}	I_T=-1mA, V_{IN}=GND to V_{CC}, V_C= V_{IH}	V_{CC}=2.3V		6	30	Ω
			V_{CC}=3V		3	20	
			V_{CC}=4.5V		2	15	
Control Input Current	$I_{I(CTL)}$	V_{CC}=0 to 5.5V, V_C= 5.5V or GND				±0.1	μA
On-state Switch Leakage Current	$I_{S(ON)}$	V_{CC}=5.5V, V_{IN}= V_{CC} or GND, V_C= V_{IH}				±0.1	μA
Off-state Switch Leakage Current	$I_{S(OFF)}$	V_{CC}=5.5V, V_{IN}= V_{CC} and V_O=GND, or V_{IN}=GND and V_O= V_{CC}, V_C= V_{IL}				±0.1	μA
Quiescent Supply Current	I_Q	V_{CC}=5.5V, V_C=V_{CC} or GND				2	μA
Control Input Capacitance	C_{IC}				1.5		pF
Feed-through Capacitance	C_F				0.5		pF
Switch Input/Output Capacitance	C_{IO}				5.5		pF

■ SWITCHING CHARACTERISTICS (T_A=25°C, see test circuit and waveforms)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Propagation Delay Time, From A to B Or B to A	t_{PLH}/t_{PHL}	C_L =15pF	V_{CC}=2.5V±0.2V		1.2	10	ns
			V_{CC}=3.3V±0.3V		0.8	6	
			V_{CC}=5V±0.5V		0.3	4	
Propagation Delay Time, From A to B Or B to A	t_{PLH}/t_{PHL}	C_L =50pF	V_{CC}=2.5V±0.2V		2.6	12	ns
			V_{CC}=3.3V±0.3V		1.5	9	
			V_{CC}=5V±0.5V		0.6	6	
Switch Turn-on Time, From C to A or B	t_{PZL}/t_{PZH}	C_L =15pF	V_{CC}=2.5V±0.2V		3.3	15	ns
			V_{CC}=3.3V±0.3V		2.3	11	
			V_{CC}=5V±0.5V		1.6	7	
Switch Turn-on Time, From C to A or B	t_{PZL}/t_{PZH}	C_L =50pF	V_{CC}=2.5V±0.2V		4.2	25	ns
			V_{CC}=3.3V±0.3V		3	18	
			V_{CC}=5V±0.5V		2.1	12	
Switch Turn-off Time, From C to A or B	t_{PLZ}/t_{PHZ}	C_L =15pF	V_{CC}=2.5V±0.2V		6	15	ns
			V_{CC}=3.3V±0.3V		4.5	11	
			V_{CC}=5V±0.5V		3.2	7	
Switch Turn-off Time, From C to A or B	t_{PLZ}/t_{PHZ}	C_L =50pF	V_{CC}=2.5V±0.2V		9.6	25	ns
			V_{CC}=3.3V±0.3V		7.2	18	
			V_{CC}=5V±0.5V		5.1	12	


■ ANALOG SWITCHING CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Frequency Response (Switch On), From A to B Or B to A		C_L= 50pF, R_L=600Ω, f_{IN}=1MHz, $20\log_{10}(V_O/V_I)$=-3dB	V_{CC}=2.3V		30		MHZ
			V_{CC}=3V		35		
			V_{CC}=4.5V		50		
Crosstalk (Between Any Switches), From A to B Or B to A		C_L= 50pF, R_L=600Ω, f_{IN}=1MHz	V_{CC}=2.3V		-45		dB
			V_{CC}=3V		-45		
			V_{CC}=4.5V		-45		
Crosstalk (Control Input To Signal Output), From C to A or B		C_L= 50pF, R_L=600Ω, f_{IN}=1MHz	V_{CC}=2.3V		15		mV
			V_{CC}=3V		20		
			V_{CC}=4.5V		50		
Feed-through Attenuation (Switch Off), From A to B Or B to A		C_L= 50pF, R_L=600Ω, f_{IN}=1MHz	V_{CC}=2.3V		-40		dB
			V_{CC}=3V		-40		
			V_{CC}=4.5V		-40		
Sine-wave Distortion		C_L= 50pF, R_L=10KΩ, f_{IN}=1KHz	V_{CC}=2.3V, V_I=2 V_{P-P}		0.1		%
			V_{CC}=3V, V_I=2.5 V_{P-P}		0.1		
			V_{CC}=4.5V, V_I=4 V_{P-P}		0.1		


■ OPERATING CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	C_L =50pF,f=1MHz		4.5		pF

■ TEST CIRCUIT AND WAVEFORMS

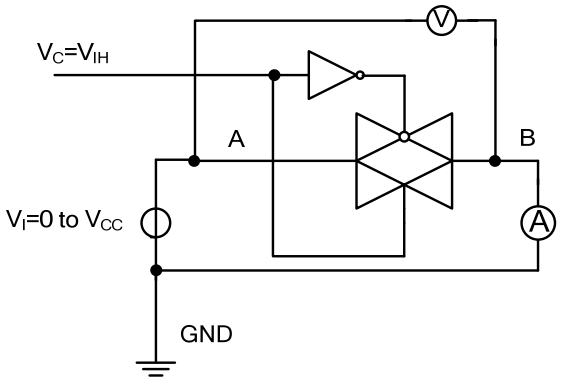


Test circuit for measuring ON-state resistance R_{ON}

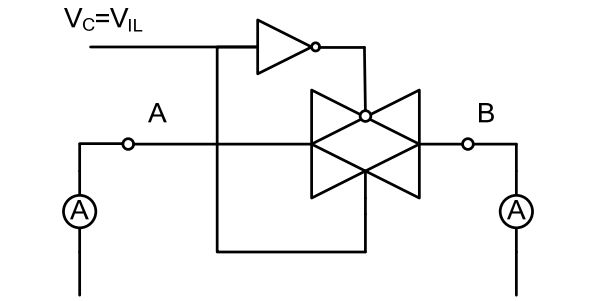

V_I=V_{CC} or GND V_O=GND or V_{CC}


Test circuit for measuring OFF-state current

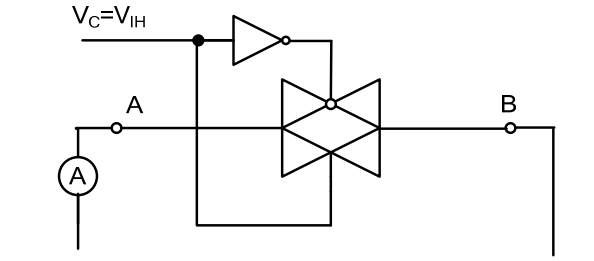

V_I=0 to V_{CC} V_O(open)


Test circuit for measuring ON-state current

■ TEST CIRCUIT AND WAVEFORMS(Cont.)

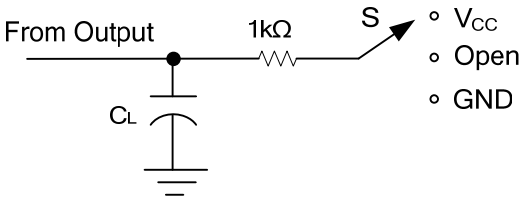


TEST	S	V_I
t_{PLH}/t_{PHL}	Open	Pulse
t_{PHZ}/t_{PZH}	GND	V_{CC}
t_{PLZ}/t_{PZL}	V_{CC}	GND

Test circuit for measuring propagation delay time, switching time

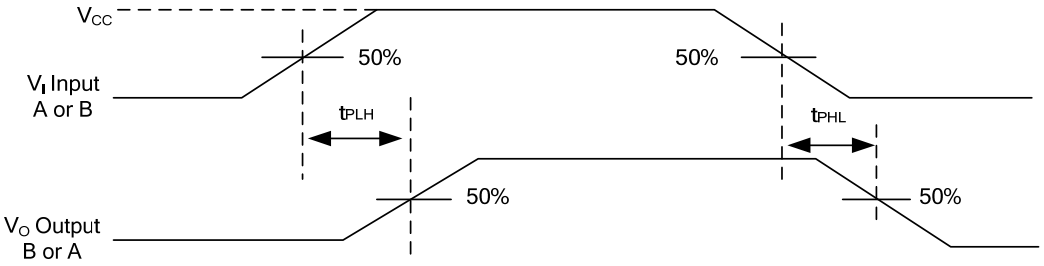

Waveforms showing the Input(V_I) to Output(V_O) propagation delays

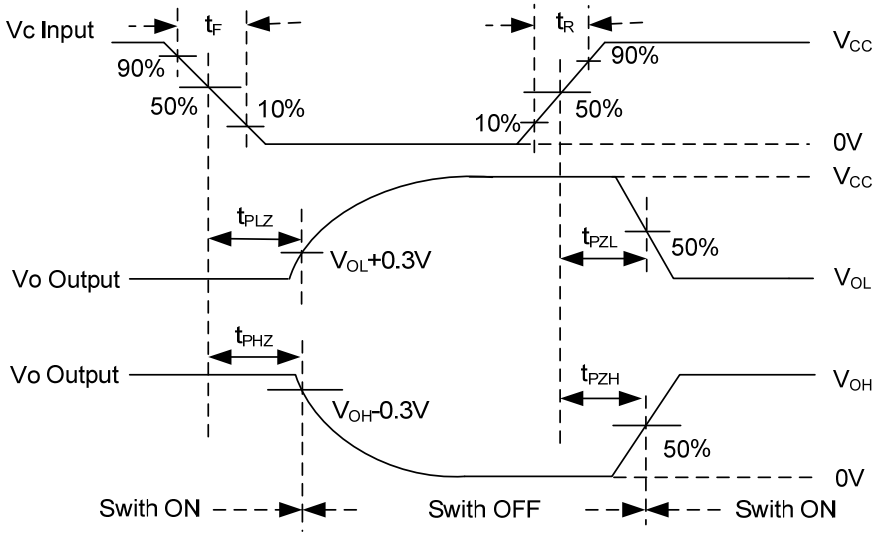

Waveforms showing the turn-on and turn-off times

Note: C_L includes probe and jig capacitance.
All input pulses are supplied by generators having the following characteristics: PRR ≤1MHz, Zo = 50Ω, tr ⩽3ns, tf ⩽3ns.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.