



U74AHCT1G14

CMOS IC

SINGLE SCHMITT-TRIGGER INVERTER



DESCRIPTION

The **U74AHCT1G14** is a single schmitt-trigger inverter providing the function $Y = \overline{A}$.

The gates of device have different input threshold levels for positive-going (V_{T+}) and negative-going (V_{T-}) signals because of the schmitt-trigger action in the input.

FEATURES

- * Operation voltage range: 4.5V ~5.5V
- * Low Power Current: $I_{CC}=1\mu A$ (Max.)
- * $\pm 8mA$ Output Drive at 5V
- * Inputs are TTL-Voltage Compatible



ORDERING INFORMATION

Ordering Number	Package	Packing
U74AHCT1G14G-AF5-R	SOT-25	Tape Reel
U74AHCT1G14G-AL5-R	SOT-353	Tape Reel


U74AHCT1G14G-AF5-R




- (1) Packing Type
- (2) Package Type
- (3) Green Package

- (1) R: Tape Reel
- (2) AF5: SOT-25, AL5: SOT-353
- (3) G: Halogen Free and Lead Free

MARKING




■ PIN CONFIGURATION




■ FUNCTION TABLE (each gate)

INPUT(A)	OUTPUT(Y)
L	H
H	L

■ LOGIC DIAGRAM (positive logic)



Logic symbol



IEC logic symbol

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	-0.5 ~ 7	V
Input Voltage	V _{IN}	-0.5 ~ 7	V
Output Voltage	V _{OUT}	-0.5 ~ V _{CC} +0.5	V
V _{CC} or GND Current	I _{CC}	±50	mA
Output Current	I _{OUT}	±25	mA
Input Clamp Current	I _{IK}	-20	mA
Output Clamp Current	I _{OK}	±20	mA
Operating Temperature	T _{OPR}	-40 ~ + 125	°C
Storage Temperature	T _{STG}	-65 ~ + 150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}		4.5		5.5	V
Input Voltage	V _{IN}		0		5.5	V
Output Voltage	V _{OUT}		0		V _{CC}	V
Input Transition Rise or Fall Rate	Δt/Δv	V _{CC} =5.0+0.5V			20	ns/V
Operating Temperature	T _A		-40		125	°C

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Positive-going threshold	V _{T+}	V _{CC} =4.5V	0.9		2	V
		V _{CC} =5.5V	1.1		2	
Negative-going threshold	V _{T-}	V _{CC} =4.5V	0.5		1.6	V
		V _{CC} =5.5V	0.6		1.5	
Negative-going threshold	ΔV _T	V _{CC} =4.5V	0.4		1.4	V
		V _{CC} =5.5V	0.5		1.6	
High-Level Output Voltage	V _{OH}	V _{CC} =4.5V	I _{OH} =-50μA	4.4	4.5	V
			I _{OH} =-8mA	3.94		
Low-Level Output Voltage	V _{OL}	V _{CC} =4.5V	I _{OL} =50μA		0.1	V
			I _{OL} =8mA		0.36	
Input Leakage Current	I _{I(LEAK)}	V _{CC} =0 ~ 5.5V, V _{IN} =5.5V or GND			±0.1	μA
Quiescent Supply Current	I _Q	V _{CC} =5.5V, V _{IN} =V _{CC} or GND, I _{OUT} =0			1	μA
Additional Quiescent Supply Current	Δ I _Q	V _{CC} =5.5V, V _{IN} =3.4V; other input at V _{CC} or GND; I _{OUT} =0			1.35	mA
Input Capacitance	C _{IN}	V _{CC} =5V, V _{IN} =V _{CC} or GND		2	10	pF


■ SWITCHING CHARACTERISTICS (T_A=25°C, see TEST CIRCUIT AND WAVEFORMS)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (nA) and (nB) to output(nY)	t _{PHL} /t _{PLH}	V _{CC} =5.5V, C _L = 15pF		4	7	ns
		V _{CC} =5.5V, C _L = 50pF		5.5	8	





■ OPERATING CHARACTERISTICS (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{PD}	V _{CC} =5V, f=1MHz, No load.		12		pF

■ TEST CIRCUIT AND WAVEFORMS

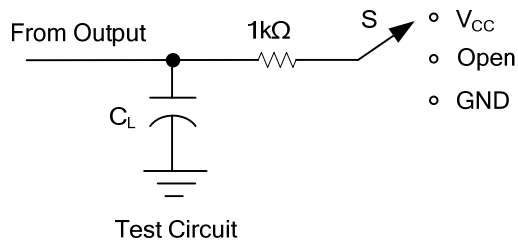

TEST	S
t_{PLH}/t_{PHL}	Open
t_{PHZ}/t_{PZH}	GND
t_{PLZ}/t_{PZL}	V_{CC}

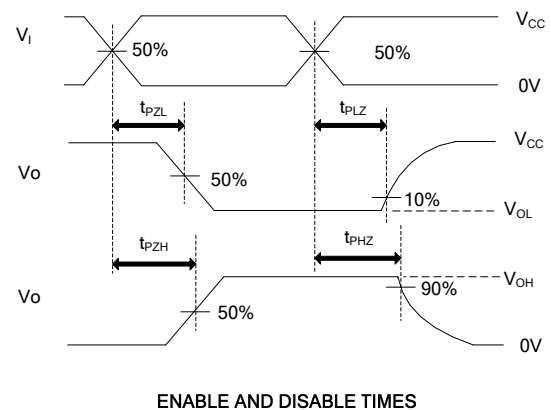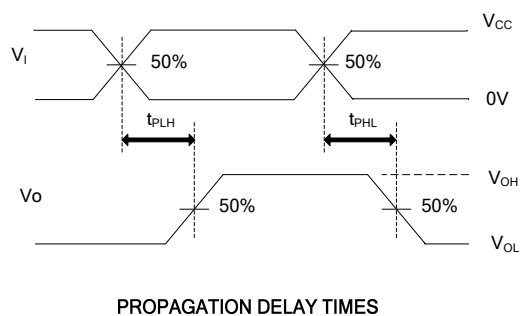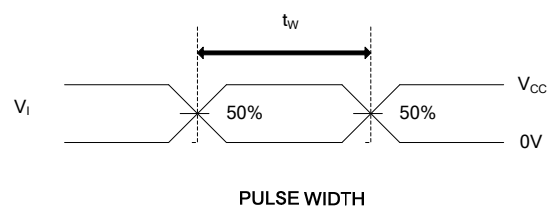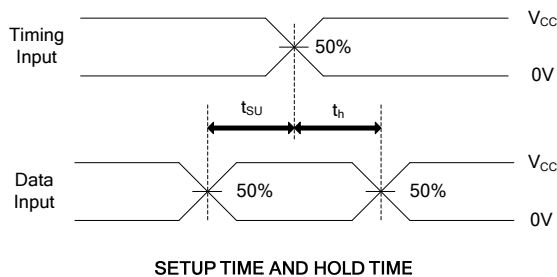

Note: C_L includes probe and jig capacitance.
 $P_{RR} \leq 1\text{MHz}$, $Z_O = 50\Omega$, $t_r \leq 3\text{ns}$, $t_f \leq 3\text{ns}$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.