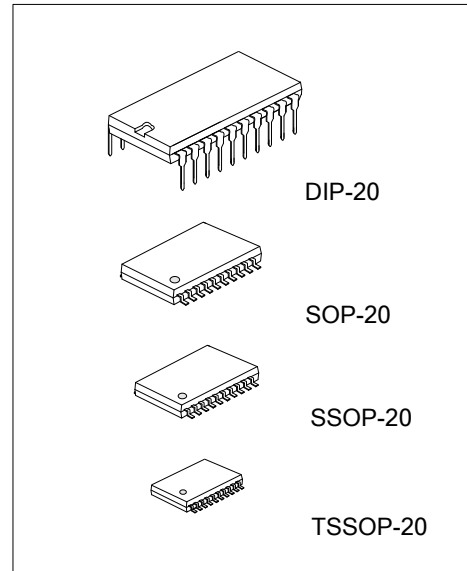


**U74HC244****CMOS IC****OCTAL BUFFER AND LINE DRIVER WITH 3-STATE OUTPUT****DESCRIPTION**

The **U74HC244** are octal buffer and line drivers with non-inverting 3-state outputs. When $\overline{nOE}$ is High, the outputs nQ will be in the high impedance.

FEATURES

- * Operation voltage range: 2~6V
- * 3-state output
- * Output Drive Capability: 15 LSTTL Loads

**ORDERING INFORMATION**


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74HC244L-D20-T	U74HC373G-D20-T	DIP-20	Tube
-	U74HC373G-S20-R	SOP-20	Tape Reel
-	U74HC373G-R20-R	SSOP-20	Tape Reel
-	U74HC373G-P20-R	TSSOP-20	Tape Reel

U74HC244L-D20-T (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel, T: Tube (2) D20: DIP-20, P20: TSSOP-20, R20: SSOP-20, S20: SOP-20 (3) L: Lead Free, G: Halogen Free and Lead Free
---	--

MARKING

DIP-20	SOP-20 / SSOP-20 / TSSOP-20
20 19 18 17 16 15 14 13 12 11 UTC □□□□ → Date Code U74HC244 □ → L: Lead Free □ → G: Halogen Free □□ → Lot Code 1 2 3 4 5 6 7 8 9 10	20 19 18 17 16 15 14 13 12 11 → Date Code UTC □□□□ U74HC244G □□ → Lot Code 1 2 3 4 5 6 7 8 9 10


PIN CONFIGURATION

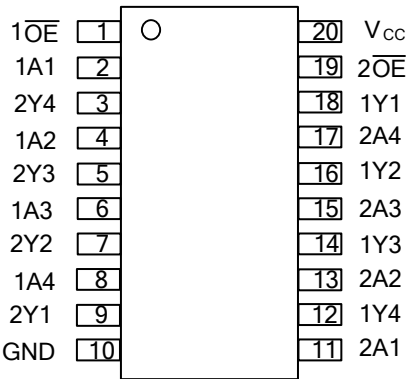

FUNCTION TABLE (each gate)

INPUT(nOE)	INPUT(nAn)	OUTPUT(nYn)
H	X	Z
L	H	H
L	L	L

LOGIC DIAGRAM (positive logic)

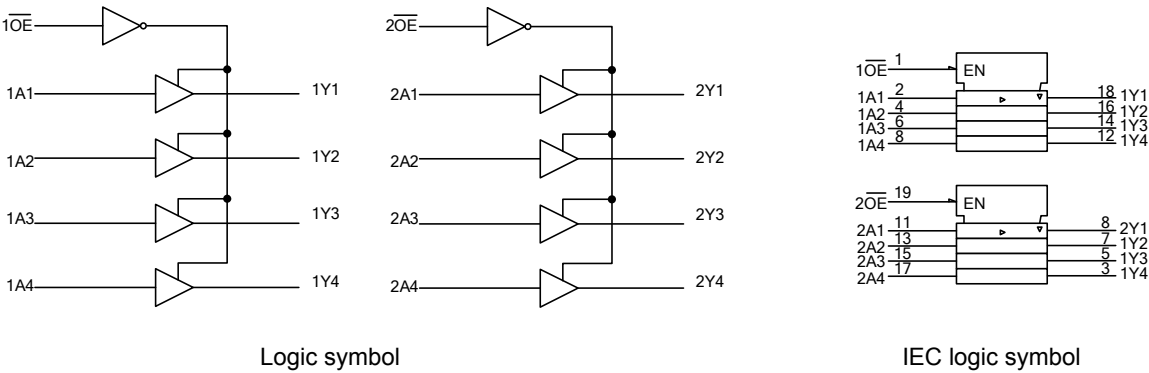

■ **ABSOLUTE MAXIMUM RATINGS** (unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5~7	V
Input Clamp Current	I_{IK}	± 20	mA
Output Clamp Current	I_{OK}	± 20	mA
Output Current	I_{OUT}	± 35	mA
V_{CC} or GND Current	I_{CC}	± 70	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **RECOMMENDED OPERATING CONDITIONS**

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2		6	V
Input Voltage	V_{IN}		0		V_{CC}	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input Rise or Fall Times	t_R, t_F	$V_{CC}=2V$			1000	ns
		$V_{CC}=4.5V$			500	ns
		$V_{CC}=6V$			400	ns
Operating Temperature	T_A		-40		85	°C

■ **STATIC CHARACTERISTICS** ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	V_{IH}	$V_{CC}=2V$	1.5			V
		$V_{CC}=4.5V$	3.15			V
		$V_{CC}=6V$	4.2			V
Low-Level Input Voltage	V_{IL}	$V_{CC}=2V$			0.5	V
		$V_{CC}=4.5V$			1.35	V
		$V_{CC}=6V$			1.8	V
High-Level Output Voltage	V_{OH}	$V_{CC}=2V, I_{OH}=-20\mu A$	1.9	1.998		V
		$V_{CC}=4.5V, I_{OH}=-20\mu A$	4.4	4.499		V
		$V_{CC}=6V, I_{OH}=-20\mu A$	5.9	5.999		V
		$V_{CC}=4.5V, I_{OH}=-6mA$	3.98	4.3		V
		$V_{CC}=6V, I_{OH}=-7.8mA$	5.48	5.8		V
Low-Level Output Voltage	V_{OL}	$V_{CC}=2V, I_{OL}=20\mu A$		0.002	0.1	V
		$V_{CC}=4.5V, I_{OL}=20\mu A$		0.001	0.1	V
		$V_{CC}=6V, I_{OL}=20\mu A$		0.001	0.1	V
		$V_{CC}=4.5V, I_{OL}=6mA$		0.17	0.26	V
		$V_{CC}=6V, I_{OL}=7.8mA$		0.15	0.26	V
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=6V, V_{IN}=V_{CC}$ or 0			± 100	nA
Output OFF-State Current	I_{OZ}	$V_{CC}=6V, V_{OUT}=V_{CC}$ or 0, $V_{IN}=V_{IH}$ or V_{IL}			± 0.5	μA
Quiescent Supply Current	I_Q	$V_{CC}=6V, V_{IN}=V_{CC}$ or 0, $I_{OUT}=0$			8	μA
Input Capacitance	C_{IN}	$V_{CC}=2V\sim 6V$		3	10	pF


■ **DYNAMIC CHARACTERISTICS** ($T_A=25^\circ\text{C}$, Input: $t_R, t_F=6\text{ns}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from input (A) to output(Y)	t_{PLH} / t_{PHL}	$V_{CC}=2\text{V}, C_L=50\text{pF}$		40	115	ns
		$V_{CC}=2\text{V}, C_L=150\text{pF}$		56	165	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$		13	23	ns
		$V_{CC}=4.5\text{V}, C_L=150\text{pF}$		18	33	ns
		$V_{CC}=6\text{V}, C_L=50\text{pF}$		11	20	ns
		$V_{CC}=6\text{V}, C_L=150\text{pF}$		15	28	ns
3-state output enable time $\overline{nOE}$ to nYn	t_{PZH} / t_{PZL}	$V_{CC}=2\text{V}, C_L=50\text{pF}$		75	150	ns
		$V_{CC}=2\text{V}, C_L=150\text{pF}$		100	200	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$		15	30	ns
		$V_{CC}=4.5\text{V}, C_L=150\text{pF}$		20	40	ns
		$V_{CC}=6\text{V}, C_L=50\text{pF}$		13	26	ns
		$V_{CC}=6\text{V}, C_L=150\text{pF}$		17	34	ns
3-state output disable time $\overline{nOE}$ to nYn	t_{PHZ} / t_{PLZ}	$V_{CC}=2\text{V}, C_L=50\text{pF}$		75	150	ns
		$V_{CC}=4.5\text{V}, C_L=50\text{pF}$		15	30	ns
		$V_{CC}=6\text{V}, C_L=50\text{pF}$		13	26	ns

■ **OPERATING CHARACTERISTICS**



PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	Cpd	No load		35		pF

TEST CIRCUIT AND WAVEFORMS

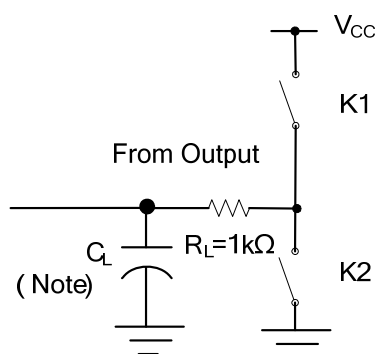

TEST	K1	K2
t_{PLH}/t_{PHL}	Open	Open
t_{PHZ}/t_{PZH}	Open	Close
t_{PLZ}/t_{PZL}	Close	Open

Note: C_L includes probe and jig capacitance.

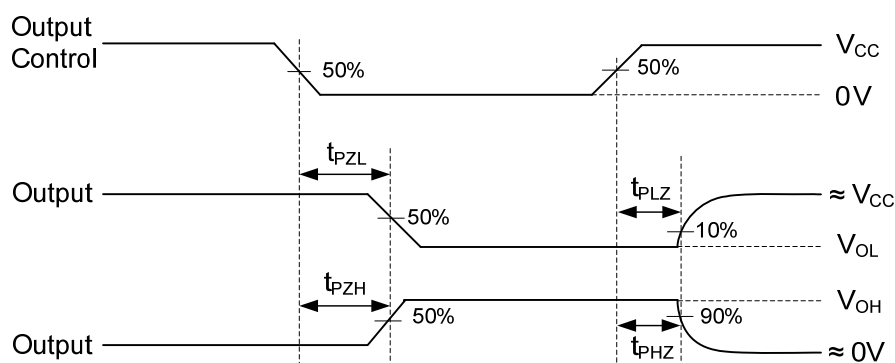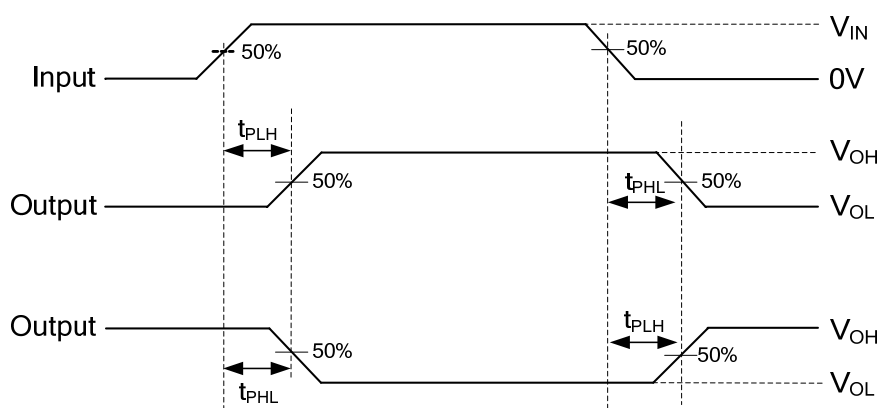

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.