


FEATURES

- **Controlled Baseline**
 - One Assembly/Test Site, One Fabrication Site
- **Extended Temperature Performance of –55°C to 125°C**
- **Enhanced Diminishing Manufacturing Sources (DMS) Support**
- **Enhanced Product-Change Notification**
- **Qualification Pedigree ⁽¹⁾**
- **Automatic Feed-Forward Compensation**
- **Programmable Pulse-by-Pulse Current Limiting**
- **Automatic Symmetry Correction in Push-Pull Configuration**
- **Enhanced Load-Response Characteristics**
- **Parallel Operation Capability for Modular Power Systems**
- **Differential Current-Sense Amplifier With Wide Common-Mode Range**
- **Double Pulse Suppression**
- **500-mA (Peak) Totem-Pole Outputs**
- **±1% Bandgap Reference**
- **Undervoltage Lockout**
- **Soft-Start Capability**
- **Shutdown Terminal**
- **500-kHz Operation**

(1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

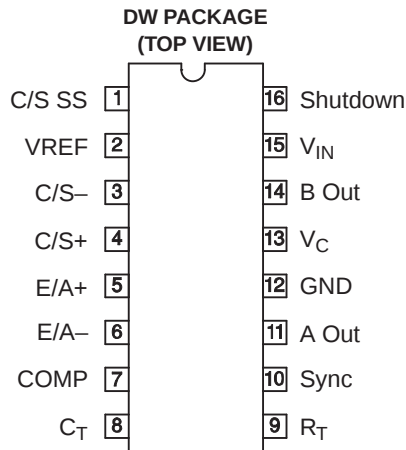

DESCRIPTION/ORDERING INFORMATION

The UC1846-EP control IC provides all of the necessary features to implement fixed-frequency, current-mode control schemes, while maintaining a minimum external parts count. The superior performance of this technique can be measured in improved line regulation, enhanced load-response characteristics, and a simpler, easier-to-design control loop. Topological advantages include inherent pulse-by-pulse current-limiting capability, automatic symmetry correction for push-pull converters, and the ability to parallel power modules, while maintaining equal current sharing.

Protection circuitry includes built-in undervoltage lockout and programmable current limit, in addition to soft-start capability. A shutdown function is also available, which can initiate either a complete shutdown with automatic restart or latch the supply off.

Other features include fully latched operation, double pulse suppression, deadline adjust capability, and a ±1% trimmed bandgap reference.

The UC1846-EP features low outputs in the OFF state.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

ORDERING INFORMATION

T _A	PACKAGE	ORDERABLE PART NUMBER	TOP-SIDE MARKING
–55°C to 125°C	SOIC – DW	UC1846MDWREP	UC1846MEP

BLOCK DIAGRAM

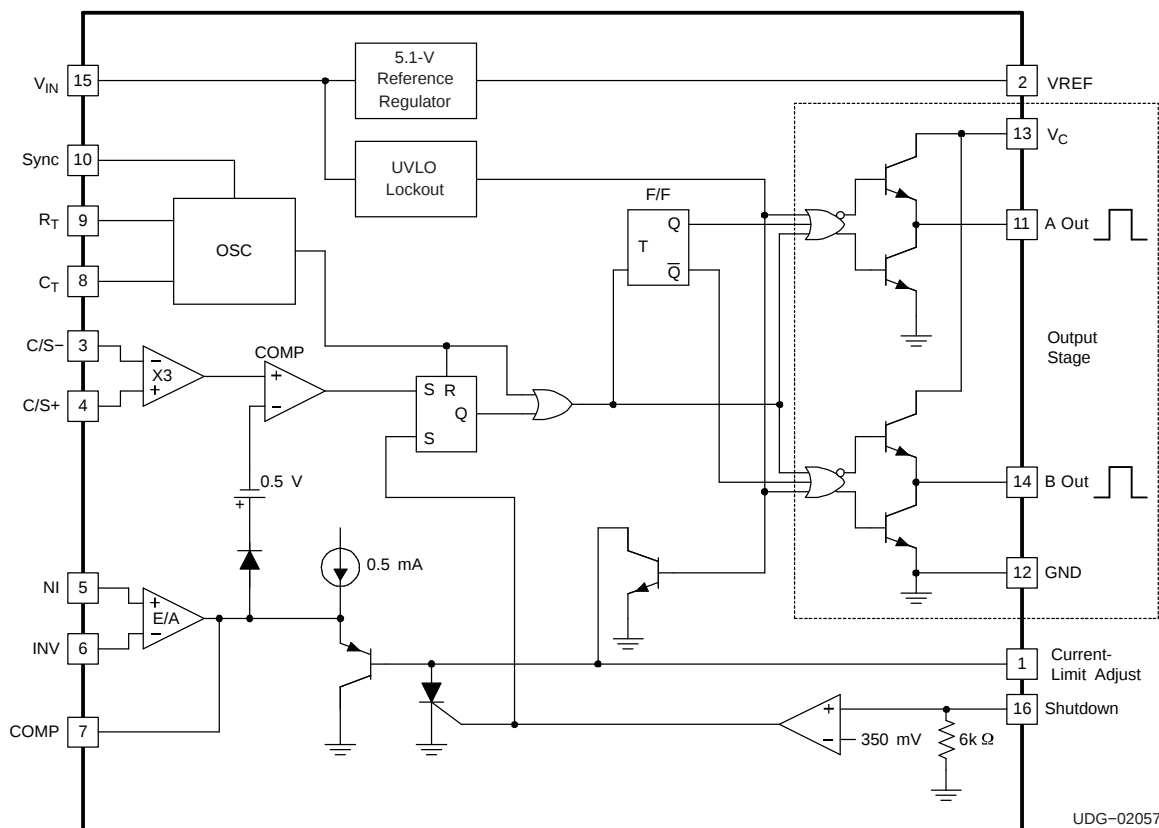

Absolute Maximum Ratings⁽¹⁾⁽²⁾

		MIN	MAX	UNIT
Supply voltage (pin 15)			40	V
Collector supply voltage (pin 13)			40	V
Output current, source or sink (pins 11, 14)			500	mA
Analog inputs (pins 3, 4, 5, 6, 16)		–0.3	V_{IN}	V
Reference output current (pin 2)			–30	mA
Sync output current (pin 10)			–5	mA
Error amplifier output current (pin 7)			–5	mA
Soft-start sink current (pin 1)			50	mA
Oscillator charging current (pin 9)			5	mA
Power dissipation	$T_A = 25^\circ\text{C}$		1000	mW
	$T_C = 25^\circ\text{C}$		2000	
Storage temperature range		–65	150	$^\circ\text{C}$
Lead temperature (soldering, 10 s)			300	$^\circ\text{C}$

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground, pin 13. Currents are positive into, negative out of the specified terminal.

Electrical Characteristics

$T_A = -55^{\circ}\text{C}$ to 125°C , $V_{IN} = 15\text{ V}$, $R_T = 10\text{ k}$, $C_T = 4.7\text{ nF}$, $T_A = T_J$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference					
Output voltage	$T_J = 25^{\circ}\text{C}$, $I_O = 1\text{ mA}$	5.05	5.1	5.15	V
Line regulation	$V_{IN} = 8\text{ V}$ to 40 V		5	20	mV
Load regulation	$I_L = 1\text{ mA}$ to 10 mA		3	15	mV
Temperature stability	Over operating range ⁽¹⁾		0.4		mV/ $^{\circ}\text{C}$
Total output variation	Line, load, and temperature ⁽¹⁾	5		5.2	V
Output noise voltage	$10\text{ Hz} \leq f \leq 10\text{ kHz}$, $T_J = 25^{\circ}\text{C}$ ⁽¹⁾		100		μV
Long-term stability	$T_J = 125^{\circ}\text{C}$, 1000 h		5		mV
Short-circuit output current	$V_{REF} = 0\text{ V}$	-10	-45		mA
Oscillator					
Initial accuracy	$T_J = 25^{\circ}\text{C}$	39	43	47	kHz
Voltage stability	$V_{IN} = 8\text{ V}$ to 40 V		-1	2	%
Temperature stability	Over operating range ⁽¹⁾		-1		%
Sync output high level		3.9	4.35		V
Sync output low level			2.3	2.5	V
Sync input high level	Pin 8 = 0 V	3.9			V
Sync input low level	Pin 8 = 0 V			2.5	V
Sync input current	Sync voltage = 3.9 V, Pin 8 = 0 V		1.3	1.5	mA
Error Amplifier					
Input offset voltage			0.5	5	mV
Input bias current			-0.6	-1	μA
Input offset current			40	250	nA
Common-mode range	$V_{IN} = 8\text{ V}$ to 40 V	0		$V_{IN} - 2$	V
Open-loop voltage gain	$\Delta V_O = 1.2\text{ V}$ to 3 V , $V_{CM} = 2\text{ V}$	80	105		dB
Unity gain bandwidth	$T_J = 25^{\circ}\text{C}$ ⁽¹⁾	0.7	1		MHz
CMRR	$V_{CM} = 0\text{ V}$ to 38 V , $V_{IN} = 40\text{ V}$	75	100		dB
PSRR	$V_{IN} = 8\text{ V}$ to 40 V	80	105		dB
Output sink current	$V_{ID} = -15\text{ mV}$ to -5 V , $V_{PIN7} = 1.2\text{ V}$	2	6		mA
Output source current	$V_{ID} = 15\text{ mV}$ to 5 V , $V_{PIN7} = 2.5\text{ V}$	-0.4	-0.5		mA
High-level output voltage	$R_L = 15\text{ k}\Omega$ (pin 7)	4.3	4.6		V
Low-level output voltage	$R_L = 15\text{ k}\Omega$ (pin 7)		0.7	1	V

(1) These parameters, although specified over the recommended operating conditions, are not 100% tested in production.

Electrical Characteristics (continued)

$T_A = -55^{\circ}\text{C}$ to 125°C , $V_{IN} = 15\text{ V}$, $R_T = 10\text{ k}$, $C_T = 4.7\text{ nF}$, $T_A = T_J$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Current-Sense Amplifier					
Amplifier gain	$V_{PIN3} = 0\text{ V}$, Pin 1 open ⁽²⁾⁽³⁾	2.5	2.75	3	V
Maximum differential input signal ($V_{PIN4} - V_{PIN3}$)	Pin 1 open, ⁽²⁾ R_L (pin 7) = 15 kW	1.1	1.2		V
Input offset voltage	$V_{PIN1} = 0.5\text{ V}$, Pin 7 open ⁽²⁾		5	25	mV
CMRR	$V_{CM} = 1\text{ V}$ to 12 V	60	83		dB
PSRR	$V_{IN} = 8\text{ V}$ to 40 V	60	84		dB
Input bias current	$V_{PIN1} = 0.5\text{ V}$, Pin 7 open ⁽²⁾		-2.5	-10	μA
Input offset current	$V_{PIN1} = 0.5\text{ V}$, Pin 7 open ⁽²⁾		0.08	1	μA
Input common-mode range		0		$V_{IN} - 3$	V
Delay to outputs	$T_J = 25^{\circ}\text{C}$ ⁽⁴⁾		200	500	ns
Current-Limit Adjust					
Current-limit offset	$V_{PIN3} = 0\text{ V}$, $V_{PIN4} = 0\text{ V}$, Pin 7 open ⁽²⁾	0.45	0.5	0.55	V
Input bias current	$V_{PIN5} = V_{REF}$, $V_{PIN6} = 0\text{ V}$		-10	-30	μA
Shutdown Terminal					
Threshold voltage		250	350	400	mV
Input voltage range		0		V_{IN}	V
Minimum latching current (I_{PIN1}) ⁽⁵⁾		3	1.5		mA
Maximum nonlatching current (I_{PIN1}) ⁽⁶⁾			1.5	0.8	mA
Delay to outputs	$T_J = 25^{\circ}\text{C}$ ⁽⁴⁾		300	600	ns
Output					
Collector-emitter voltage		40			V
Collector leakage current	$V_C = 40\text{ V}$			200	μA
Output low level	$I_{SINK} = 20\text{ mA}$		0.1	0.4	V
	$I_{SINK} = 100\text{ mA}$		0.4	2.1	
Output high level	$I_{SOURCE} = 20\text{ mA}$	13	13.5		V
	$I_{SOURCE} = 100\text{ mA}$	12	13.5		
Rise time	$C_L = 1\text{ nF}$, $T_J = 25^{\circ}\text{C}$ ⁽⁴⁾		50	300	ns
Fall time	$C_L = 1\text{ nF}$, $T_J = 25^{\circ}\text{C}$ ⁽⁴⁾		50	300	ns
Undervoltage Lockout					
Start-up threshold			7.7	8	V
Threshold hysteresis			0.75		V
Total Standby Current					
Supply current			17	21	mA

(2) Parameter measured at trip point of latch with $V_{PIN5} = V_{REF}$, $V_{PIN6} = 0\text{ V}$.

(3) Amplifier gain defined as:


$$G = \frac{(\Delta V_{PIN7})}{(\Delta V_{PIN4})}$$

where $V_{PIN4} = 0$ to 1 V

(4) These parameters, although specified over the recommended operating conditions, are not 100% tested in production.


(5) Current into pin 1 is ensured to latch circuit in shutdown state.

(6) Current into pin 1 is ensured not to latch circuit in shutdown state.

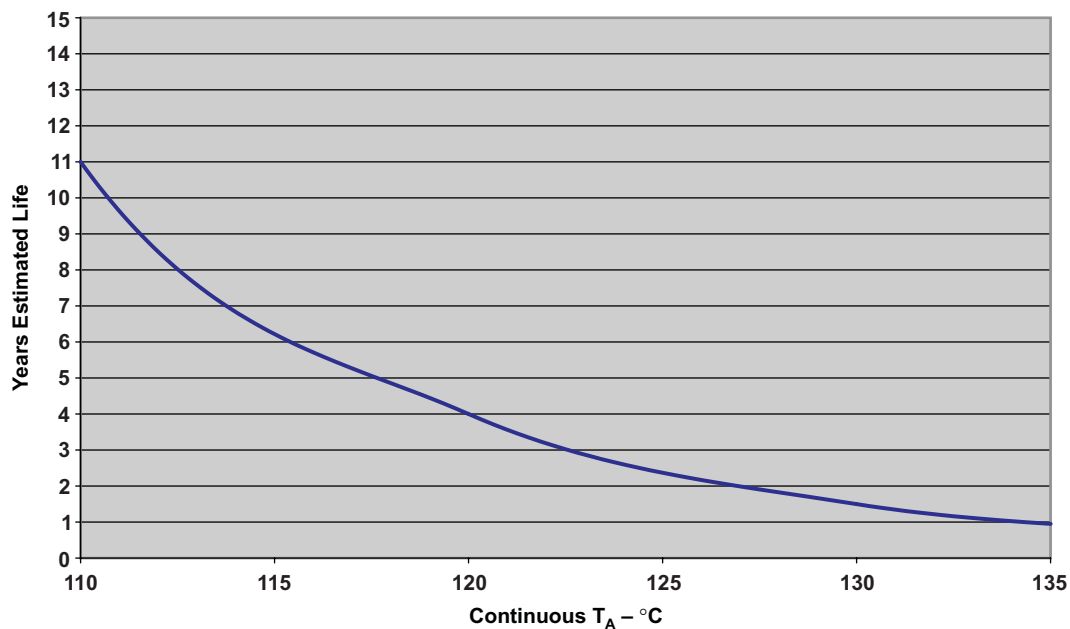

**Figure 1. UC1846MDWREP Estimated Device Life at Elevated Temperatures
Wirebond Voiding Fail Modes**

APPLICATION INFORMATION

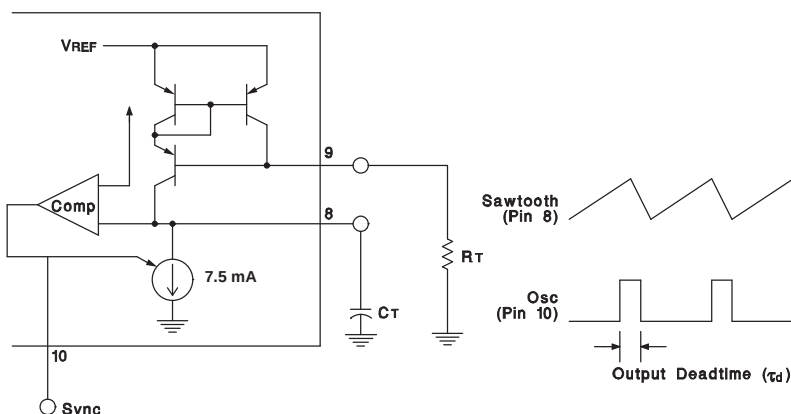

Output deadtime is determined by the external capacitor, C_T , according to the formula:


$$\tau_d (\mu s) = 145 C_T (\mu f) \left(\frac{I_D}{I_D - \frac{3.6}{R_T (k\Omega)}} \right)$$

I_D = Oscillator discharge current at 25°C is typically 7.5 mA.

For large values of R_T : $\tau_d (\mu s) \approx 145 C_T (\mu f)$

Oscillator frequency is approximated by the formula: $f_T (kHz) \approx \frac{2.2}{R_T (k\Omega) \times C_T (\mu f)}$

Figure 2. Oscillator Circuit

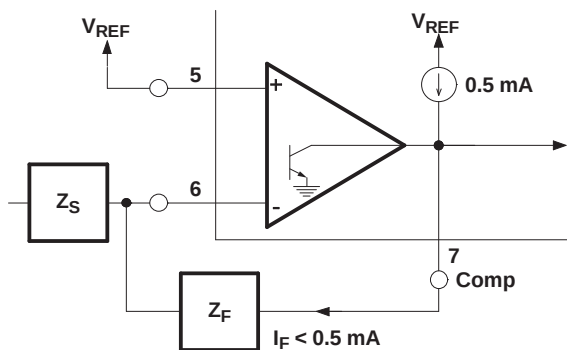

Error amplifier can source up to 0.5 mA.

Figure 3. Error-Amplifier Output Configuration

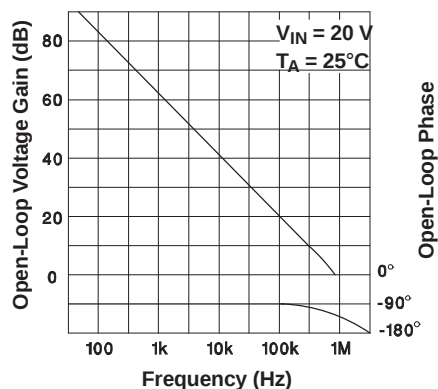


Figure 4. Error-Amplifier Gain and Phase vs Frequency

APPLICATION INFORMATION (continued)


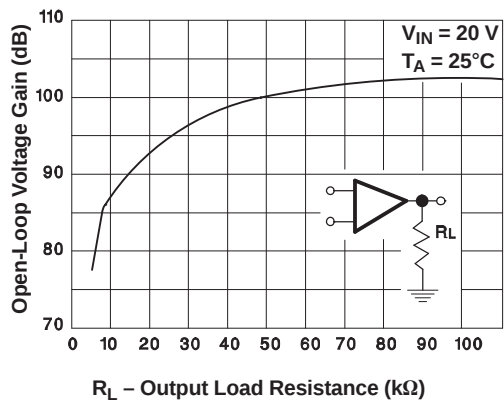


Figure 5. Error-Amplifier Open-Logic DC Gain vs Load Resistance

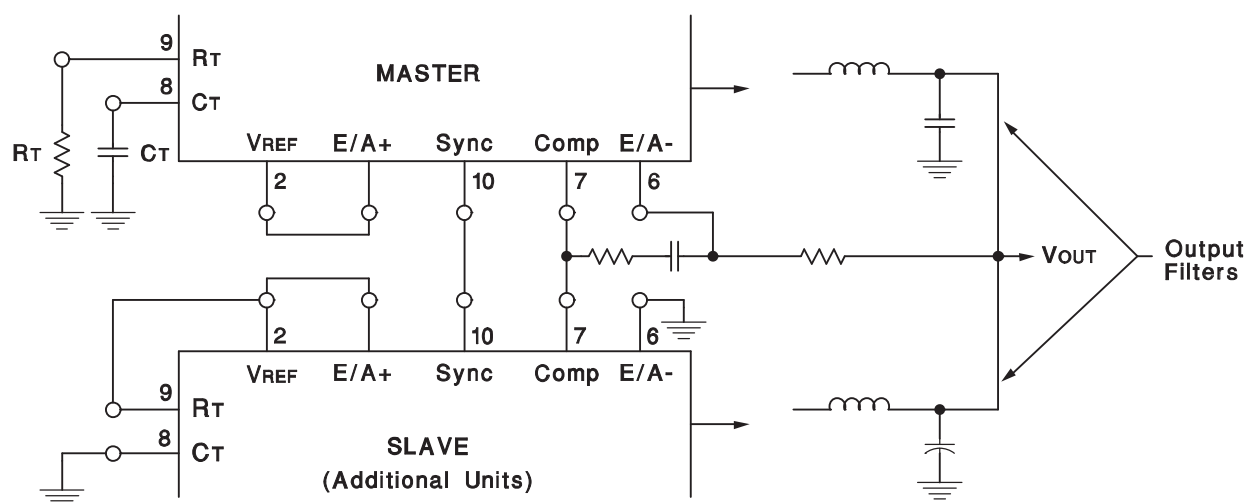

Slaving allows parallel operation of two or more units with equal current sharing.

Figure 6. Parallel Operation

APPLICATION INFORMATION (continued)


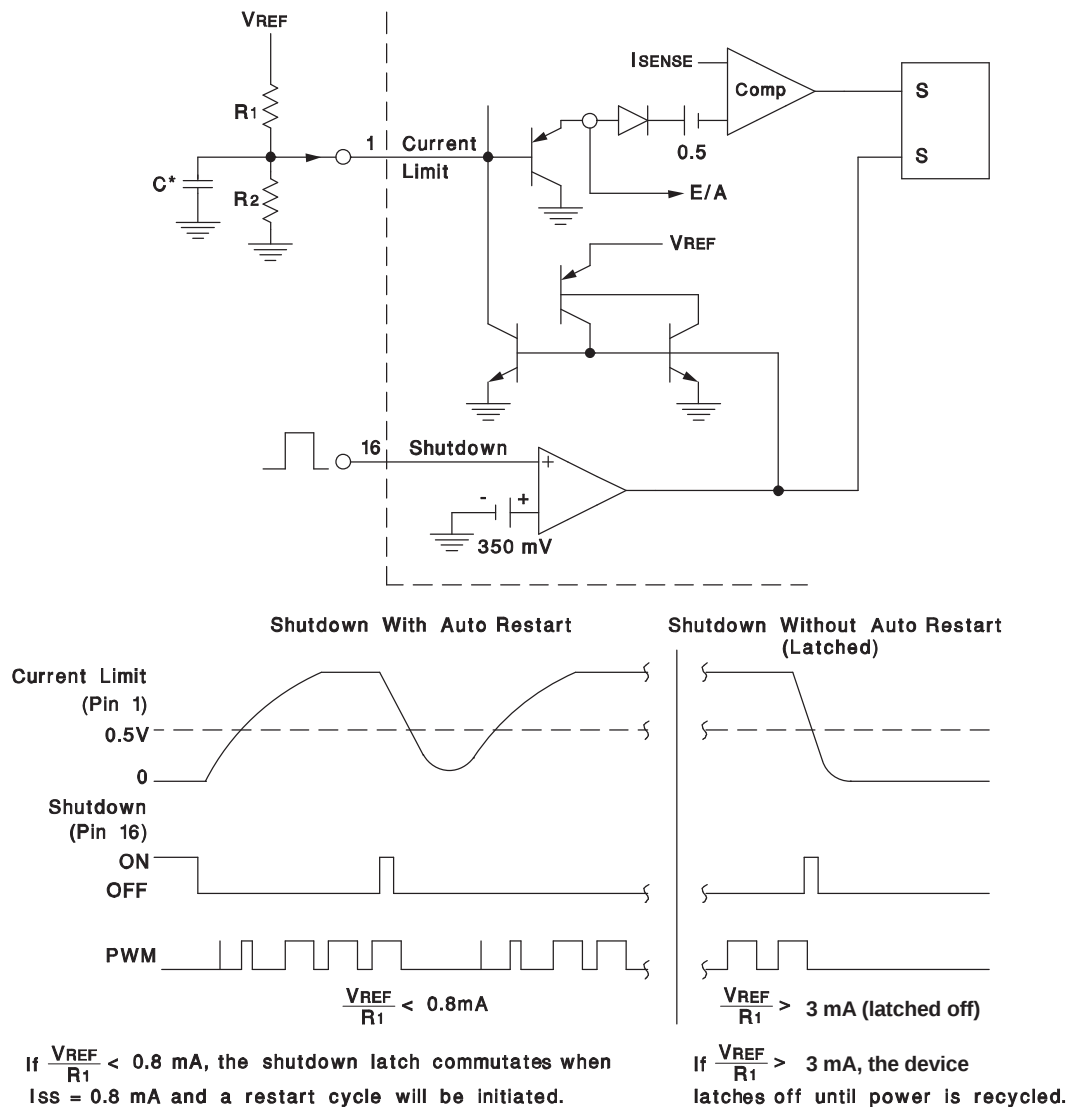



Figure 8. Soft-Start and Shutdown/Restart Functions

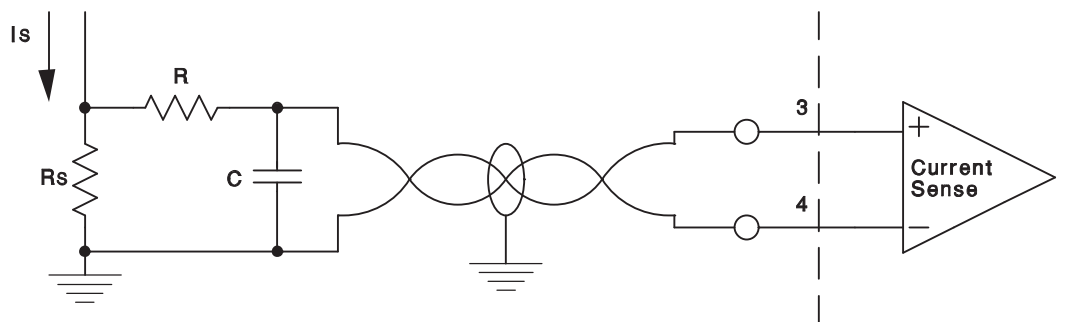

A small RC filter may be required in some applications to reduce switch transients.
Differential input allows remote noise-free sensing.

Figure 9. Current-Sense Amplifier Connection

APPLICATION INFORMATION (continued)

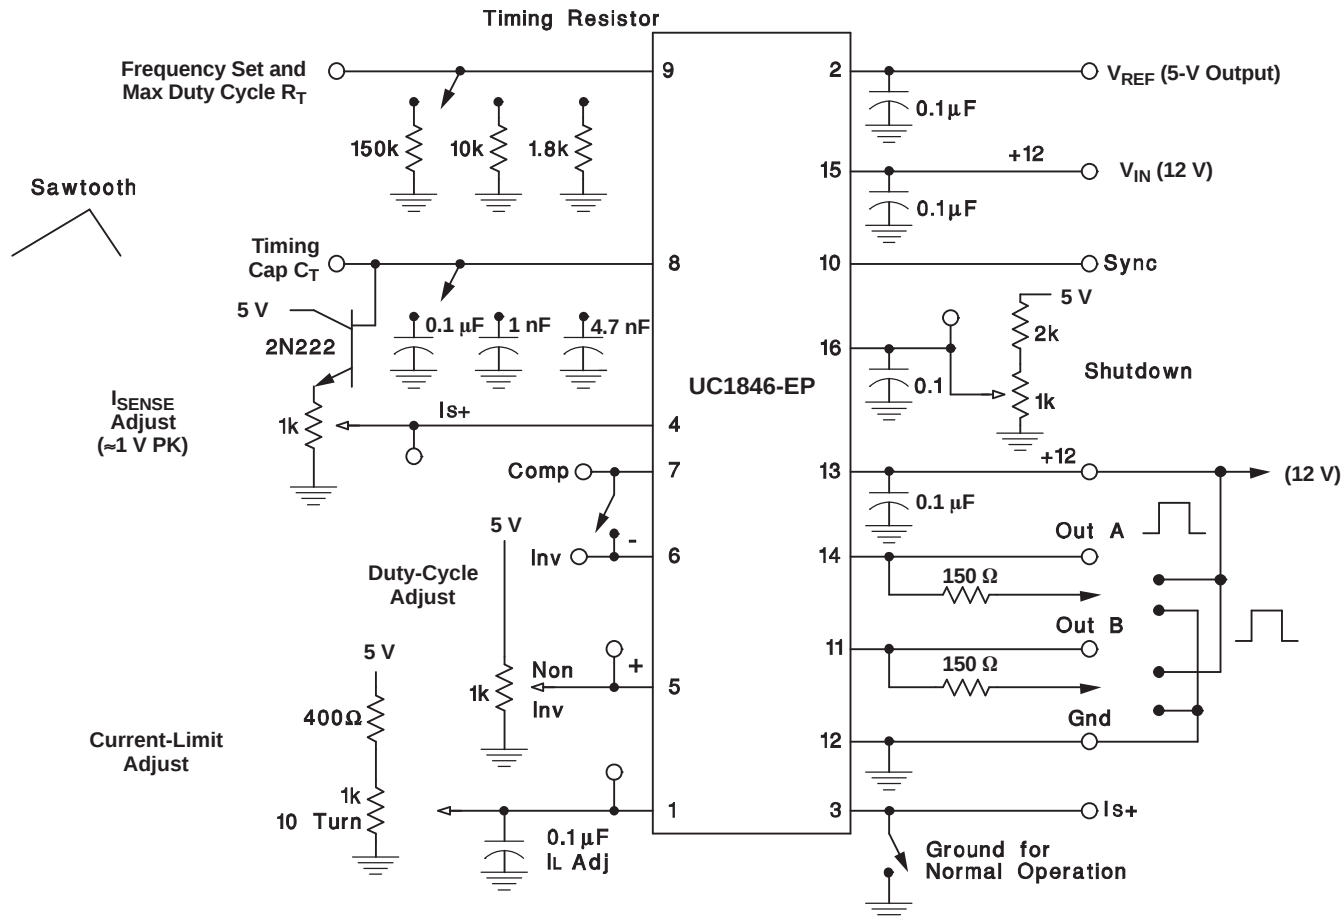

–Bypass capacitance should be low ESR and ESL type.

–Short pins 6 and 7 for unity gain testing.

Figure 10. Open-Loop Test Circuit

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/ Ball Finish	MSL Peak Temp ⁽³⁾	Samples (Requires Login)
UC1846MDWREP	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Add to cart
V62/06606-01XE	ACTIVE	SOIC	DW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	Add to cart

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF UC1846-EP :

● Catalog: [UC1846](#)


● Space: [UC1846-SP](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application

DW (R-PDSO-G16)

PLASTIC SMALL OUTLINE

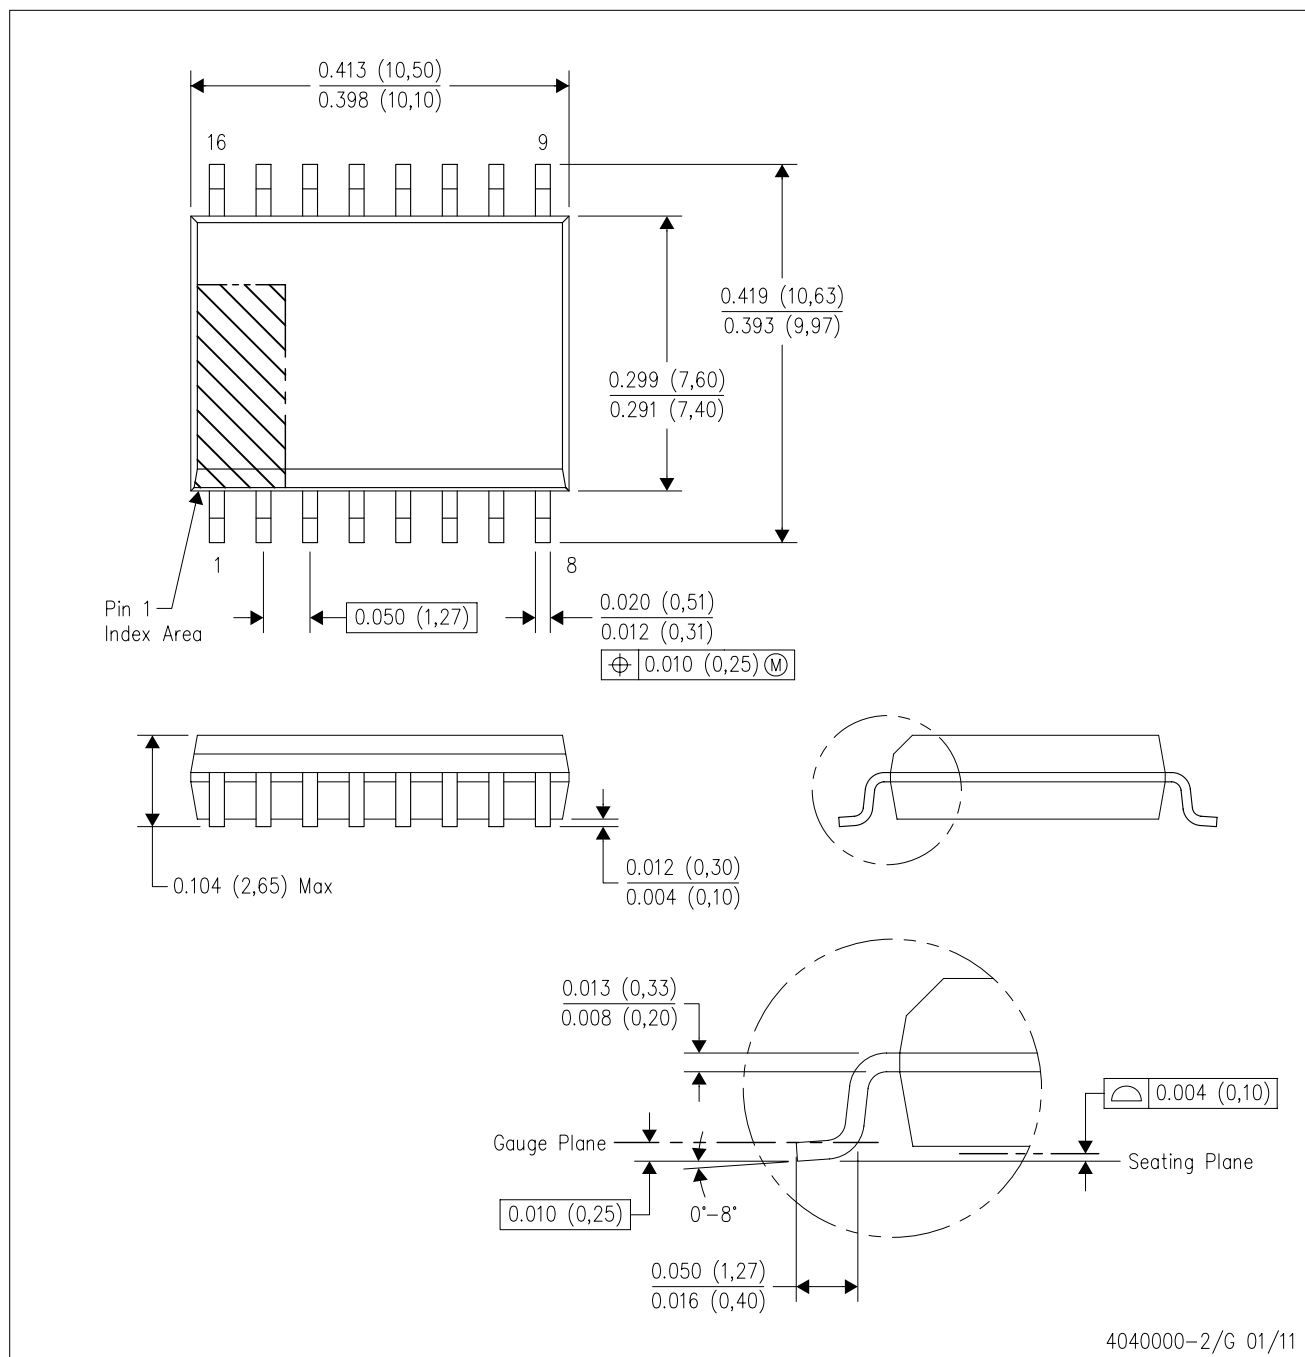

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated