

UC3383

CMOS IC

PFM CONTROLLED, STEP-UP DC/DC CONVERTERS (VARIABLE DUTY RATIO)



SOT-25



SOT-89

■ DESCRIPTION

The UTC **UC3383** Series are PFM step-up DC/DC switching converter. The UTC **UC3383** can support both large and small currents. It automatically switches duty ratio (45%/75%) when it senses changes in load.

Both built-in and external transistor types include 5-pin and 3-pin packages, which are provided with either a CE (chip enable) function that reduces power consumption during shut-down mode, or a V_{DD} pin function (separated power and voltage detect pins).

■ FEATURES

* Output Voltage Range: 2.0V~7.0V in 0.1V Increments
* Operating (Start-up) Voltage Range: 0.9V~10V
* Highly Accurate: Set-up Voltage ±2.5%
* Maximum Oscillator Frequency (Max Fosc1): 180kHz (±15%)
* Variable Duty Ratio: 45%/75% (±5%)
* Both Switching Transistor Built-in and External Types are Available
* 5-Lead Package Offer Chip Enable or Independent V_{OUT} Pin Option.

■ RDERING INFORMATION

Ordering Number		Package	Pin Assignment					Packing
Lead Free	Halogen Free		1	2	3	4	5	
UC3383L-xx-AB3-R	UC3383G-xx-AB3-R	SOT-89	V_{SS}	V_{OUT}	Lx	-	-	Tape Reel
UC3383L-xx-AF5-R	UC3383G-xx-AF5-R	SOT-25	CE	V_{OUT}	NC	V_{SS}	Lx	Tape Reel



Note: Pin Assignment: NC: No Connection CE: Chip Enable
xx: Output Voltage, refer to Marking Information.

UC3383G-xx-AB3-R
(1)Packing Type
(2)Package Type
(3)Output Voltage Code
(4)Green Package

(1) R: Tape Reel
(2) AB3: SOT-89, AF5: SOT-25
(3) xx: refer to Marking Information
(4) G: Halogen Free and Lead Free, L: Lead Free

Copyright © 2018 Unisonic Technologies Co., Ltd.

■ MARKING INFORMATION

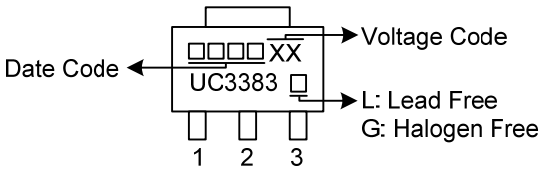
PACKAGE	VOLTAGE CODE	MARKING
SOT-25	20:2.0V 25:2.5V 26:2.6V 27:2.7V 28:2.8V 30:3.0V 31:3.1V 32:3.2V 33:3.3V 36:3.6V 37:3.7V 40:4.0V 45:4.5V 50:5.0V	
SOT-89		

■ PIN DESCRIPTION

PIN NO.		PIN NAME	FUNCTION
SOT-25	SOT-89		
1	-	CE	Chip Enable
2	2	V_{OUT}	Output voltage monitor, IC internal power supply
3	-	NC	No Connection
4	1	V_{SS}	Ground
5	3	Lx	Switch

■ BLOCK DIAGRAM

UTC UC3383 V_{DD} is internally connected to the V_{OUT} pin.

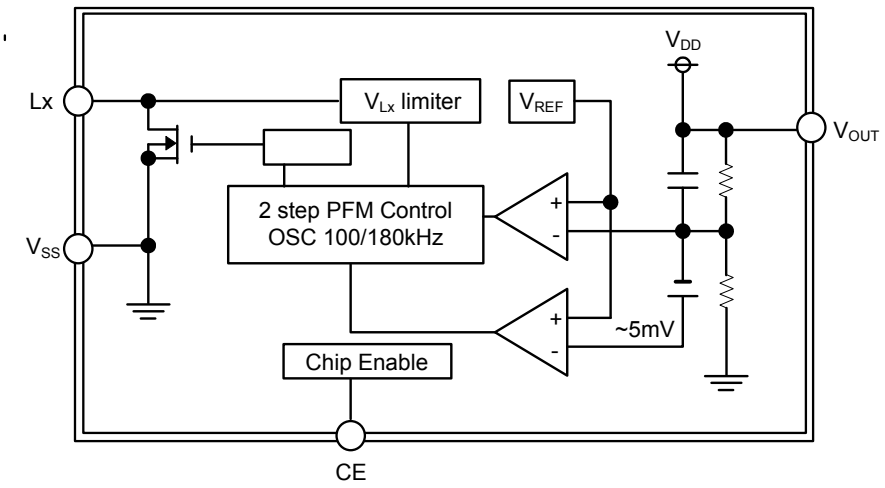

Note: The CE pin is only used with the 5-Lead Package.

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
V_{OUT} Input Voltage		V_{OUT}	12	V
Lx pin Voltage		V_{Lx}	12	V
CE Input Voltage		V_{CE}	12	V
V_{DD} Input Voltage		V_{DD}	12	V
Lx pin Current		I_{LX}	400	mA
Power Dissipation	SOT-89	P_D	500	mW
	SOT-25		250	mW
Operating Junction Temperature		T_J	+125	°C
Ambient Operating Temperature		T_{OPR}	-30 ~ +80	°C
Storage Temperature		T_{STG}	-40 ~ +125	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTRISTICS(T_A=25°C, V_{IN}=V_{OUT}× 0.6, unless otherwise specified)

UTC UC3383-2.0V (I_{OUT}=10mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	1.950	2.000	2.050	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD1}. F_{OSC}>F_{OSC}1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.3	8.6	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		13.6	27.3	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		1.9	3.9	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		9.1	13.7	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	50	55	60	%
Efficiency		EFFI	L, SD, C_L etc. connected		70		%
Maximum Oscillation Frequency		F_{OSC}1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		F_{OSC}2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

■ ELECTRICAL CHARACTRISTICS (Cont.)

UTC UC3383-2.5V (I_{OUT}=10mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	2.438	2.500	2.563	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD1}. F_{OSC}>F_{OSC}1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.45	8.95	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		16.65	33.35	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.0	4.05	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		7.15	10.8	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		70		%
Maximum Oscillation Frequency		F_{OSC}1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		F_{OSC}2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

UTC UC3383-2.6V (I_{OUT}=10mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	2.535	2.600	2.665	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD1}. F_{OSC}>F_{OSC}1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.48	9.02	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		17.26	34.56	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.02	4.08	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		6.76	10.22	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}.Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		70		%
Maximum Oscillation Frequency		F_{OSC}1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		F_{OSC}2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

■ ELECTRICAL CHARACTRISTICS (Cont.)

UTC UC3383-2.7V (I_{OUT}=10mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	2.633	2.700	2.768	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD1}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.51	9.09	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		17.87	35.77	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.04	4.11	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		6.37	9.64	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}.Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		70		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

UTC UC3383-2.8V (I_{OUT}=10mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	2.730	2.800	2.870	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD1}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.54	9.16	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		18.48	36.98	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.06	4.14	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		5.98	9.06	Ω
Duty Ratio 1		DTY1	Same as I_{DD1},.Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		70		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

■ ELECTRICAL CHARACTRISTICS (Cont.)

UTC UC3383-3.0V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	2.925	3.000	3.075	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.6	9.3	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		19.7	39.4	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.1	4.2	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		5.2	7.9	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

UTC UC3383-3.1V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	3.023	3.100	3.178	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.635	9.365	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		20.3	40.6	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.115	4.23	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		5.08	7.72	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}, Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

■ ELECTRICAL CHARACTRISTICS (Cont.)

UTC UC3383-3.2V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	3.120	3.200	3.280	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.67	9.34	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		20.9	41.8	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.13	4.26	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		4.96	7.54	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

UTC UC3383-3.3V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	3.218	3.300	3.383	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.705	9.41	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		21.5	43	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.145	4.29	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		4.84	7.36	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

■ ELECTRICAL CHARACTRISTICS (Cont.)

UTC UC3383-3.6V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	3.510	3.600	3.690	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.81	9.62	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		23.3	46.6	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.19	4.38	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		4.48	6.82	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

UTC UC3383-3.7V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	3.608	3.700	3.793	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.845	9.755	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		23.9	47.8	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.205	4.41	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		4.36	6.64	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

■ ELECTRICAL CHARACTRISTICS (Cont.)

UTC UC3383-4.0V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	3.900	4.000	4.100	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		4.95	9.94	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		25.7	51.4	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.25	4.5	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		4.0	6.1	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

UTC UC3383-4.5V (I_{OUT}=30mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	4.388	4.500	4.613	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		5.125	10.25	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		28.8	57.6	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		2.325	4.65	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		3.4	5.2	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		80		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

■ ELECTRICAL CHARACTRISTICS (Cont.)

UTC UC3383-5.0V (I_{OUT}=50mA)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage		V_{OUT}	L, SD, C_L etc. connected	4.875	5.000	5.125	V
Maximum Input Voltage		V_{IN}				10	V
Oscillation Start-up Voltage		V_{ST}	I_{OUT}=1mA		0.80	0.90	V
Oscillation Hold Voltage		V_{HLD}	I_{OUT}=1mA	0.70			V
Lx Limit Voltage		V_{LxLMT}	Same as I_{DD1}. F_{OSC}>Fosc1×2	0.7		1.1	V
No-Load Input Current		I_{IN}	I_{OUT}=0mA (Note 1)		5.3	10.6	μA
Supply Current 1(Note 2)		I_{DD1}	V_{IN}=V_{OUT}×0.95		31.7	63.4	μA
Supply Current 2		I_{DD2}	V_{IN}=V_{OUT}+0.5V		4.0	8.0	μA
Lx Leakage Current		I_{LXL}	No external components, V_{OUT}=V_{Lx}=10V.			1.0	μA
Lx Switch-On Resistance		R_{SWON}	Same as I_{DD1}. V_{Lx}=0.4V		2.8	4.3	Ω
Duty Ratio 1		DTY1	Same as I_{DD1}. Measuring of Lx waveform	70	75	80	%
Duty Ratio 2		DTY2	I_{OUT}=1mA. Measuring of Lx on-time	40	45	50	%
Efficiency		EFFI	L, SD, C_L etc. connected		85		%
Maximum Oscillation Frequency		Fosc1	Same as I_{DD1}. 75% duty	100	120	130	kHz
		Fosc2	Same as I_{DD1}. 45% duty	150	180	210	kHz
FOR 5-PINS PACKAGE ONLY							
CE Voltage	High	V_{CEH}	Same as I_{DD1}. Existence of Lx Oscillation.	0.75			V
	Low	V_{CEL}	Same as I_{DD1}. Disappearance of Lx Oscillation			0.20	V
CE "High" Current	High	I_{CEH}	Same as I_{DD1}. V_{CE}=V_{OUT}×0.95			0.25	μA
	Low	I_{CEL}	Same as I_{DD1}. V_{CE}=0V			-0.25	μA
Stand-by Current		I_{STB}	Same as I_{DD1}.			0.5	μA

Note: 1. The Schottky diode (SD) must be type MA735, with reverse current(I_R)<1.0μA at reverse voltage (V_R) =10V.
2. "Supply Current 1" is the supply current while the oscillator is continuously oscillating. The current actually provided by an external V_{IN} source is represented by "No-Load Input Current (I_{IN})".

■ TYPICAL APPLICATION CIRCUITS

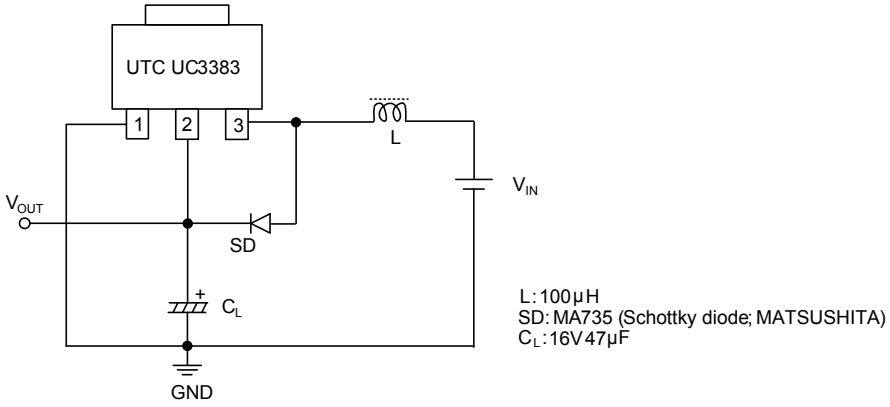


Fig.1 3-Lead Package Application(SOT-89)


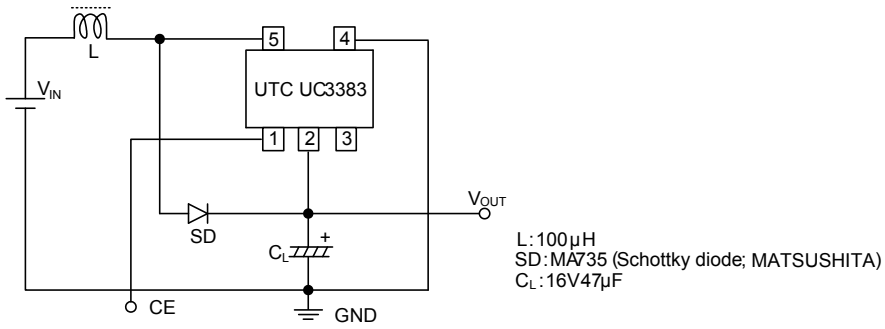


Fig.2 5-Lead Package Application(SOT-25)


■ TYPICAL CHARACTERISTICS (BUILT-IN SWITCHING TRANSISTOR)

(1) OUTPUT VOLTAGE vs. OUTPUT CURREN

L3383-3.0V

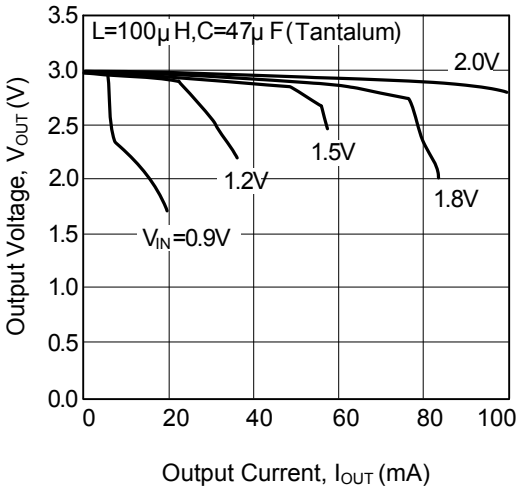


L3383-5.0V

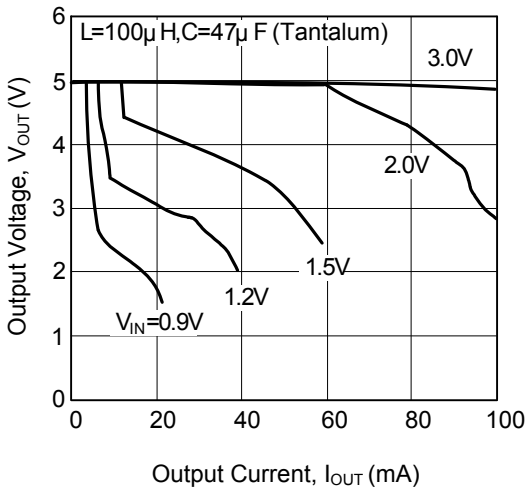


(2) EFFICIENCY vs. OUTPUT CURRENT

(3)

L3383-3.0V

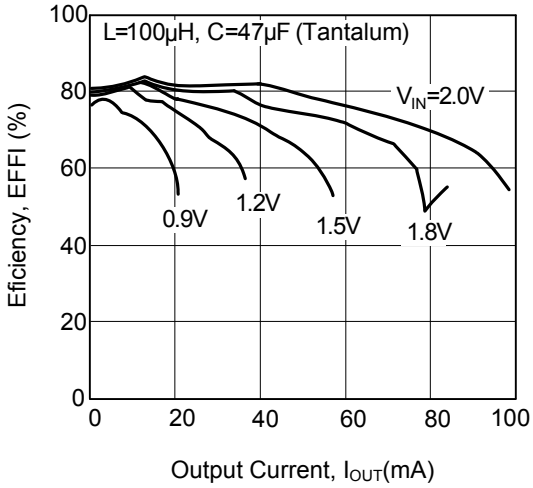


L3383-5.0V

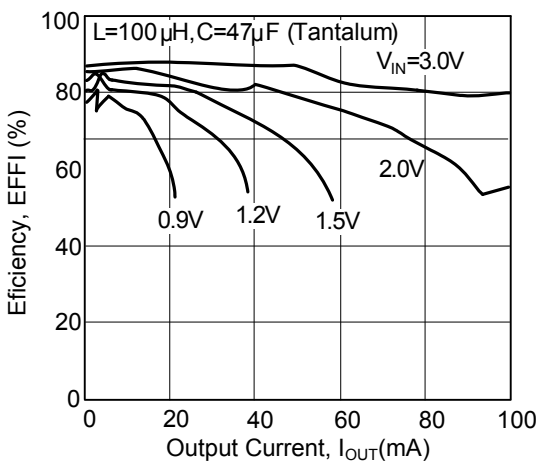


(3) RIPPLE VOLTAGE vs. OUTPUT CURRENT

L3383-3.0V

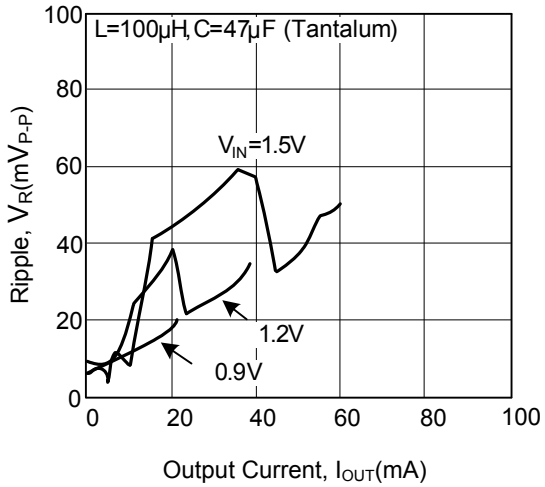


L3383-5.0V

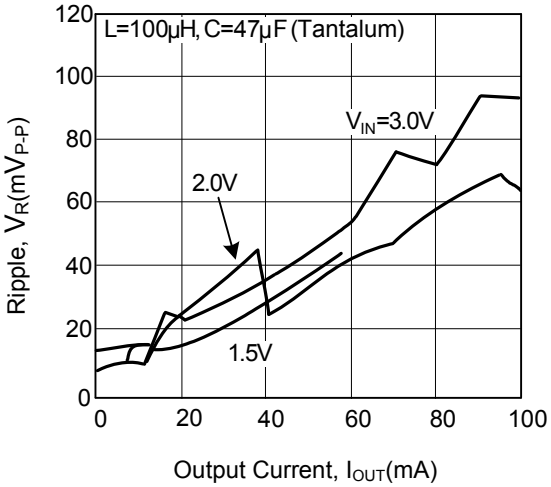


■ TYPICAL CHARACTERISTICS FOR UC3383-5.0


(1) Operating Start Voltage, Retain Voltage vs. Output Current

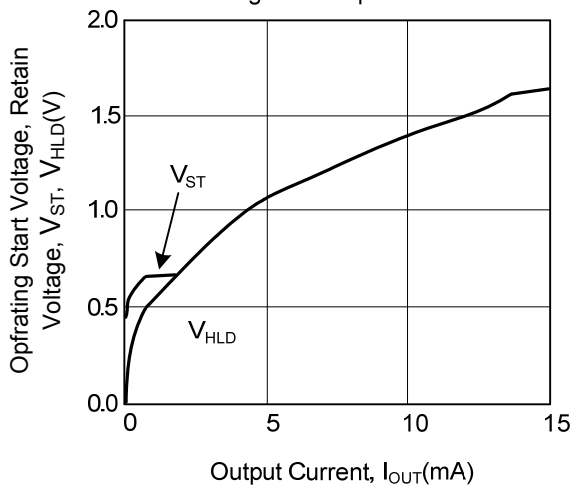


(2) Output Voltage vs. Temperature

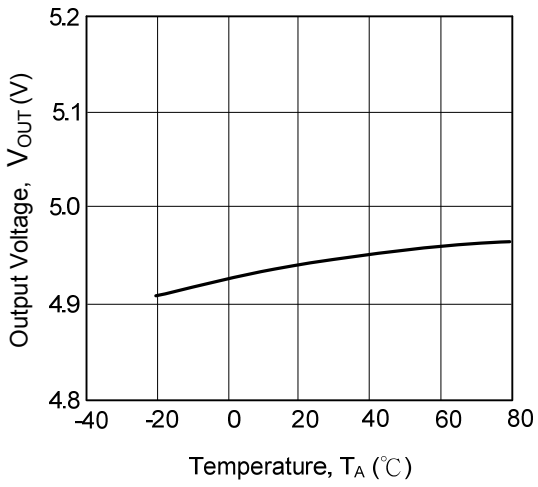


(3) Operating Start Voltage, Retain Voltage vs. Output Current

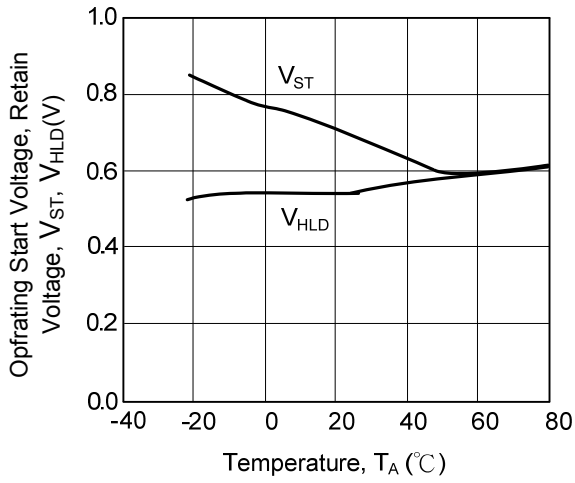


(4) Current Consumption 1 vs. Temperature

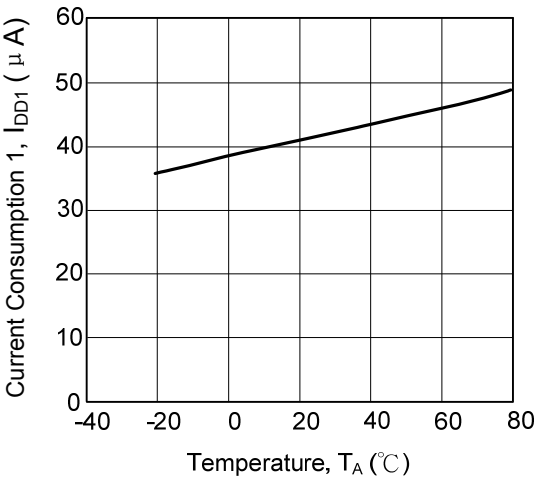

(5) Current Consumption 2 vs. Temperature

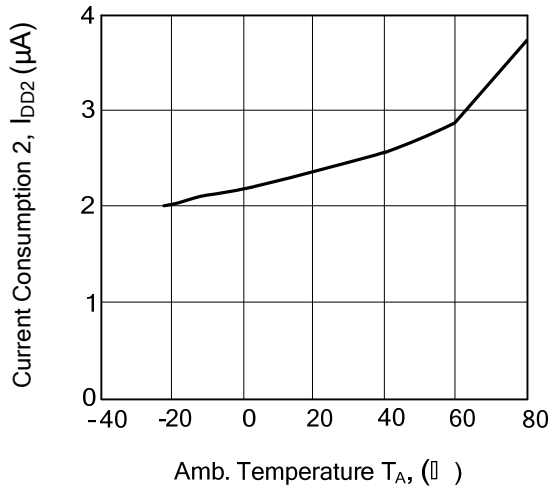


(6) Lx Switching-on Resistance vs. Temperature

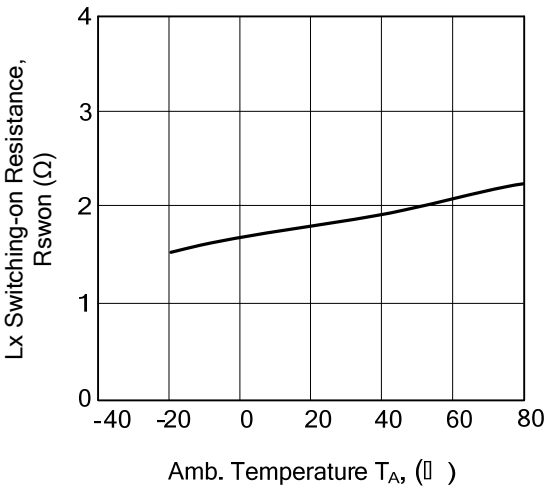


■ TYPICAL CHARACTERISTICS FOR UC3383-5.0V (cont.)

(7) Max Osc Frequency1, 2 vs. Amb. Temperture

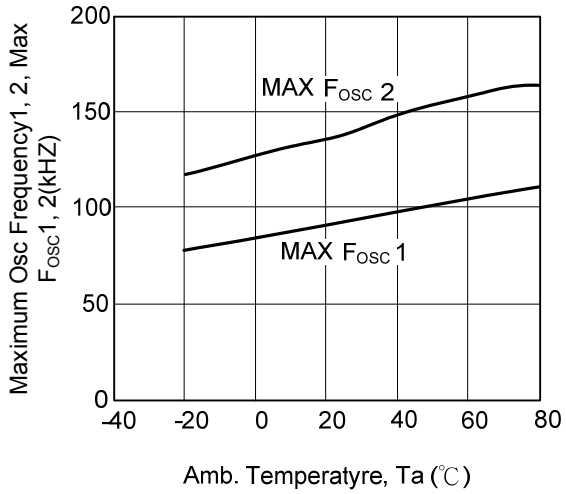

(8) Duty Ratio1, 2 vs. Amb. Temperature

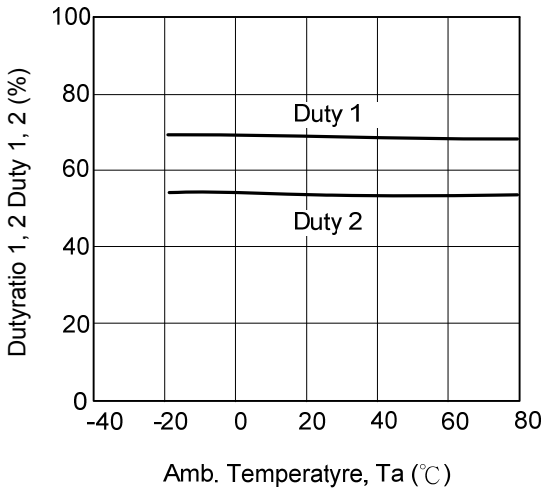

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.