Glass Passivated Ultra Fast Recovery Rectifier

COMCHIP
SMD DIODE SPECIALIST

UF20C01CF-G THRU UF20C05CF-G

Voltage Range 50 to 600 V
Current 20.0 Ampere


Features

- ✶ Fast switching for high efficiency
- ✶ Low forward voltage drop
- ✶ High current capability
- ✶ Low reverse leakage current
- ✶ High surge current capability

Mechanical Data

- ✶ Case: Molded plastic ITO-220AB
- ✶ Epoxy: UL 94V-0 rate flame retardant
- ✶ Terminals: Solderable per MIL-STD-202 method 208
- ✶ Polarity:Color band denotes cathode
- ✶ Mounting position: Any
- ✶ Weight: 1.81 grams

ITO-220AB

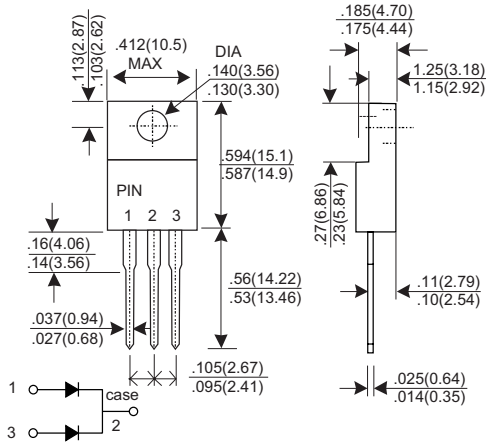

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	SYMBOL	UF 20C01CF-G	UF 20C02CF-G	UF 20C03CF-G	UF 20C04CF-G	UF 20C05CF-G	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	V
Maximum Average Forward Rectified Current T_C=125°C	$I_{F(AV)}$	20.0					A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	125					A
Maximum Instantaneous Forward Voltage @ 10.0 A	V_F	1.0			1.3	1.7	V
Maximum DC Reverse Current @T_J=25°C At Rated DC Blocking Voltage @T_J=125°C	I_R	10.0 250					uA uA
Maximum Reverse Recovery Time (Note 1)	Trr	50				75	nS
Typical junction Capacitance (Note 2)	C_J	120			70		pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	2.0					°CW
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150					°C

NOTES : (1) Reverse recovery test conditions I_F = 0.5A, I_R = 1.0A, Irr = 0.25A.
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
(3) Thermal Resistance junction to case.

RATINGS AND CHARACTERISTIC CURVES UF20C01CF-G THRU UF20C05CF-G

FIG.1 - FORWARD CURRENT DERATING CURVE

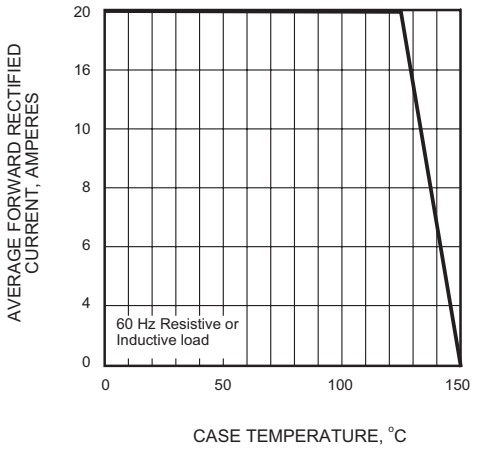


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

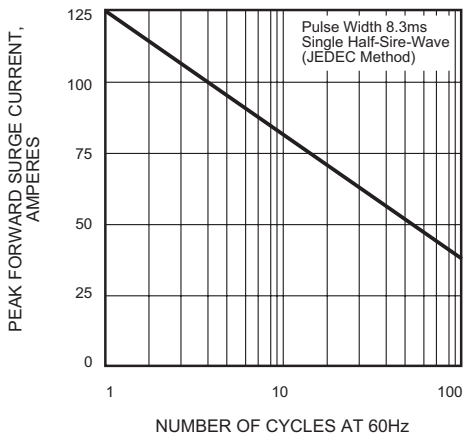


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

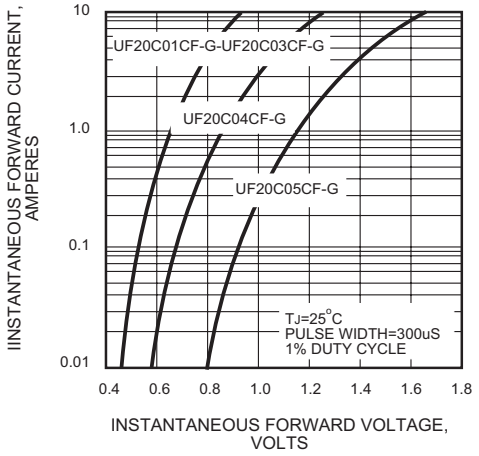


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

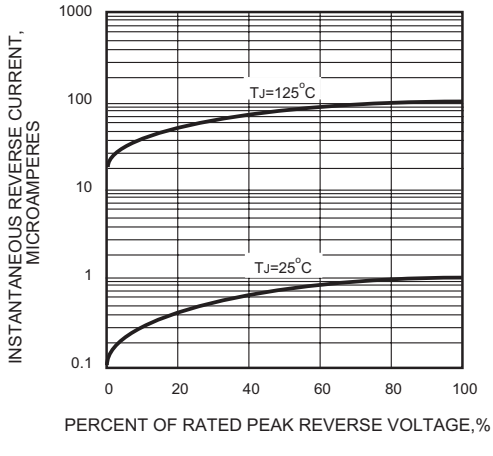


FIG.5 - TYPICAL JUNCTION CAPACITANCE

