
2.5V DRIVE SILICON N-CHANNEL MOSFET

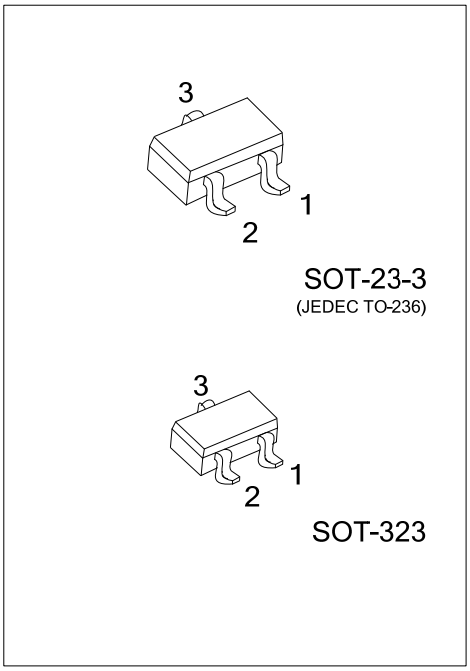


■ DESCRIPTION

The UTC **UK3018** is a Silicon N-channel MOSFET, designed to minimize on-state resistance while it provides rugged, reliable and fast switching performance. The product is particularly suited for low voltage and low current applications such as small servo motor controllers, power MOSFET gate drivers, and other switching applications.

■ FEATURES

* Min V_{DSS} =30V
* $R_{DS(ON)}$ =5Ω(V_{GS}=4V)
* $R_{DS(ON)}$ =7Ω(V_{GS}=2.5V)
* Pulsed ID=400mA
* Low voltage drive (2.5V)
* Halogen Free

■ SYMBOL



■ ORDERING INFORMATION


Ordering Number	Package	Pin Assignment			Packing
		1	2	3	
UK3018G-AE2-R	SOT-23-3	S	G	D	Tape Reel
UK3018G-AL3-R	SOT-323	S	G	D	Tape Reel

UK3018G-AE2-R

(1)Packing Type
(2)Package Type
(3)Halogen Free

(1) R: Tape Reel
(2) AE2: SOT-23-3, AL3: SOT-323
(3) G: Halogen Free

■ MARKING



Copyright © 2009 Unisonic Technologies Co., LTD

■ ABSOLUTE MAXIMUM RATING (Ta=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	30	V
Gate-Source Voltage		V_{GSS}	±20	V
Drain Current	Continuous	I_D	100	mA
	Pulsed (Note 2)	I_{DP}	400	mA
Power Dissipation (Note 3)		P_D	200	mW
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Pw≤10μs, Duty cycle≤1%
3. With each pin mounted on the recommended lands.


■ THERMAL RESISTANCE

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	625	°C/W


■ ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V, I_D=10μA	30			V
Drain-Source Leakage Current	I_{DSS}	V_{DS}=30V, V_{GS}=0V			1	μA
Gate-Source Leakage Current	I_{GSS}	V_{DS}=0V, V_{GS}=±20V,			±1	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	V_{DS}=3V, I_D=100μA	0.8		1.5	V
Static drain-source on-state resistance	$R_{DS(ON)}$	V_{GS}=4V, I_D=10mA,		5	8	Ω
		V_{GS}=2.5V, I_D=1mA,		7	13	Ω
DYNAMIC PARAMETERS						
Input capacitance	C_{ISS}	V_{DS} = 5V, V_{GS} = 0V, f = 1MHz		13		pF
Output capacitance	C_{OSS}			9		pF
Reverse transfer capacitance	C_{RSS}			4		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	$t_{D(ON)}$	V_{GS} = 5V, V_{DD}≈5V I_D = 10mA, R_L = 500Ω, R_G = 10Ω		15		ns
Turn-ON Rise Time	t_R			35		ns
Turn-OFF Delay Time	$t_{D(OFF)}$			80		ns
Turn-OFF Fall-Time	t_F			80		ns

■ TEST CIRCUITS AND WAVEFORMS

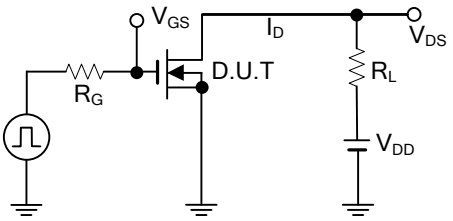

Switching Time Measurement Circuit

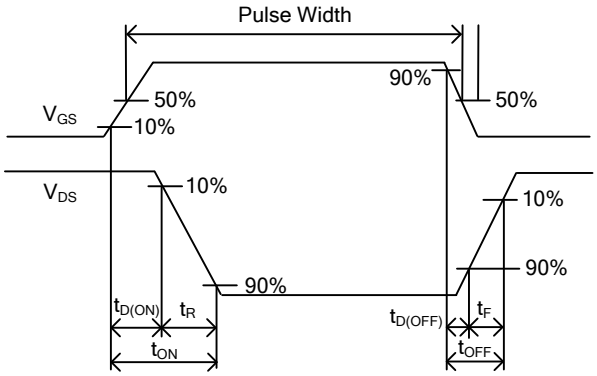

Switching Time Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.