

DESCRIPTION

The ULN2803/2804 series are high-voltage, high-current darlington arrays comprised of eight NPN darlington

pairs. All units feature integral clamp diodes for switching inductive loads.

FEATURES

- Output current.....500mA
- High Sustaining Voltage.....50V Min.
- Output Clamp Diode
- Inputs Compatible With Various Types of Logic

Type	Input Resistor	Designation
ULN2803	2.7K Ω	TTL, 5V C-MOS
ULN2804	10.5K Ω	6~15V P-MOS, C-MOS


MAXIMUM RATING(Ta=25°C unless otherwise)

Characteristic	Symbol	Rating	Unit
Output Sustaining Voltage	$V_{CE(SUS)}$	50	V
Output Current	I_{OUT}	500	mA
Input Voltage	V_{IN}	-0.5~+30	V
Input Current	I_{IN}	25	mA
Clamp Reverse Voltage	V_R	50	V
Diode Forward Current	I_F	500	mA
GND Terminal Current	I_{GND}	3.2	A
Power Dissipation	P_D	1.47	W
Operating Temperature	T_{opr}	-40~85	°C
Storage Temperature	T_{stg}	-55~150	°C


18 DIP




PIN CONNECTION (TOP VIEW)

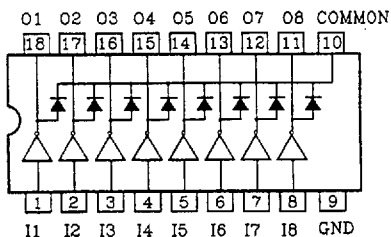

ULN2803



ULN2804

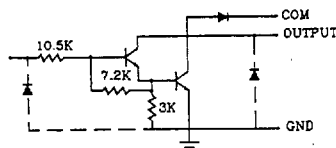

RECOMMENDED OPERATING CONDITIONS($T_a = -40 \sim 85^\circ\text{C}$)


CHARACTERISTIC	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Output Sustaining Voltage	$V_{CE(SUS)}$		0	-	50	V
Output Current	I_{OUT}	$T_{PW}=25\text{mS}, DF=8\%, 8 \text{ Circuits}$	0	-	400	mA
		$T_{PW}=25\text{mS}, DF=25\% 8 \text{ Circuits}$	0	-	200	
Input Voltage	V_{IN}		0	-	30	V
Clamp Diode Reverse Voltage	V_R		-	-	50	V
Clamp Diode Forward Current	I_F		-	-	400	mA
Power Dissipation	P_D		-	-	0.52	W

ELECTRICAL CHARACTERISTICS($T_a = 25^\circ\text{C}$ unless otherwise noted)


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	CONDITION	MIN.	TYP.	MAX.	UNIT
Output leak Current	I_{CEX}	1	$V_{CE}=50\text{V}, T_a=25^\circ\text{C}$	-	-	50	μA
			$V_{CE}=50\text{V}, T_a=85^\circ\text{C}$	-	-	100	
			$V_{CE}=50\text{V}, V_{IN}=1\text{V}$	-	-	500	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	2	$I_{OUT}=350\text{mA}, I_{IN}=500\mu\text{A}$	-	1.3	1.6	V
			$I_{OUT}=200\text{mA}, I_{IN}=350\mu\text{A}$	-	1.1	1.3	
			$I_{OUT}=100\text{mA}, I_{IN}=250\mu\text{A}$	-	0.9	1.1	
Input Current	$I_{IN(on)}$	3	$V_{IN}=3.85\text{V}$	-	0.93	1.35	mA
			$V_{IN}=5\text{V}$	-	0.35	0.5	
			$V_{IN}=12\text{V}$	-	1.0	1.45	
Input Voltage	$V_{IN(on)}$	4	$I_{OUT}=500\mu\text{A}, T_a=85^\circ\text{C}$	50	65	-	μA
			$V_{CE}=2\text{V}, I_{OUT}=200\text{mA}$	-	-	2.4	
			$V_{CE}=2\text{V}, I_{OUT}=250\text{mA}$	-	-	2.7	
Input Voltage	$V_{IN(on)}$	5	$V_{CE}=2\text{V}, I_{OUT}=300\text{mA}$	-	-	3.0	V
			$V_{CE}=2\text{V}, I_{OUT}=125\text{mA}$	-	-	5.0	
			$V_{CE}=2\text{V}, I_{OUT}=200\text{mA}$	-	-	6.0	
			$V_{CE}=2\text{V}, I_{OUT}=275\text{mA}$	-	-	7.0	
			$V_{CE}=2\text{V}, I_{OUT}=350\text{mA}$	-	-	8.0	
DC Current Transistor Ratio	h_{FE}	2	$V_{CE}=2\text{V}, I_{OUT}=350\text{mA}$	1000	-	-	
Clamp Diode Reverse Current	I_E	6	$V_R=50\text{V}, T_a=25^\circ\text{C}$	-	-	50	μA
			$V_R=50\text{V}, T_a=85^\circ\text{C}$	-	-	100	
Clamp Diode Forward Voltage	V_F	7	$I_F=350\text{mA}$	-	-	2.0	V
Input Capacitance	C_{IN}			-	15	-	pF
Turn-On Delay	t_{ON}	8	$V_{OUT}=50\text{V}, R_L=163\Omega$ $C_L=15\text{pF}$	-	0.1	-	μS
Turn-Off Delay	t_{OFF}			-	0.2	-	

TEST CIRCUIT


1. I_{CEX}

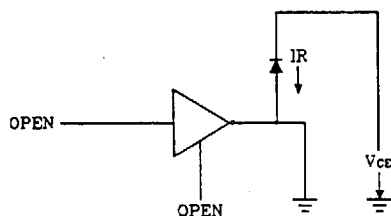


2. $V_{CE(sat)}$, h_{FE}




3. $I_{IN(ON)}$

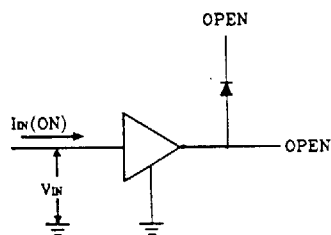


4. $I_{IN(OFF)}$

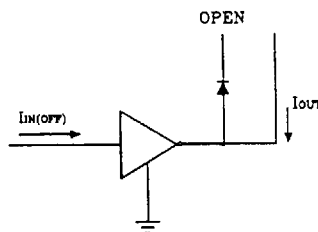


5. $V_{IN(ON)}$

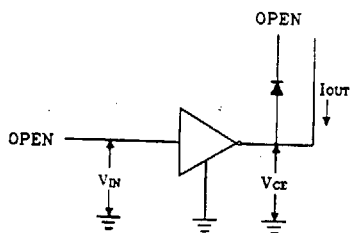


6. I_R

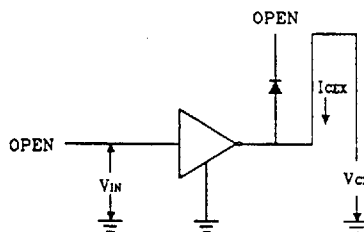

7. V_F

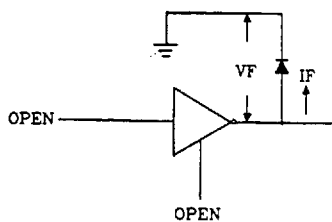

8. t_{ON} , t_{OFF}

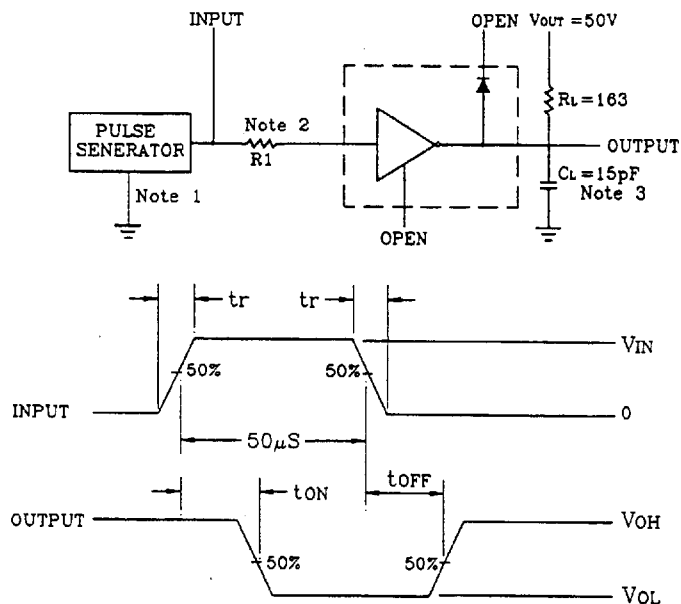

Notes: 1. Pulse Width $50 \mu\text{s}$, Duty Cycle 10%

Output Impedance 50Ω

$t_r \leq 5 \text{ ns}$, $t_f \leq 10 \text{ ns}$


2. See below

Input Conditions


TYPE NUMBER	R_L	V_{IH}
ULN2803	0	3V
ULN2804	0	8V

3. C_L includes prob and jig capacitance.


ULN2803 $I_{IN} - V_{IN}$

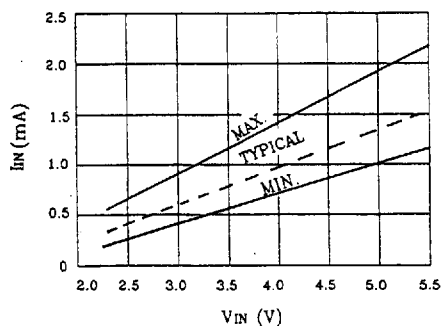


ULN2804 $I_{IN} - V_{IN}$

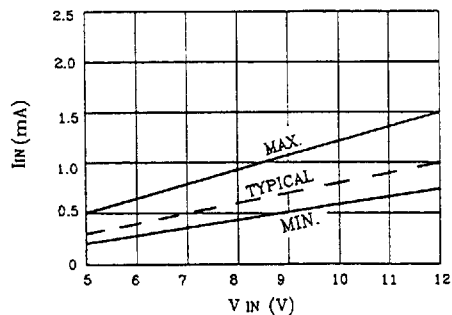

$P_D - T_a$

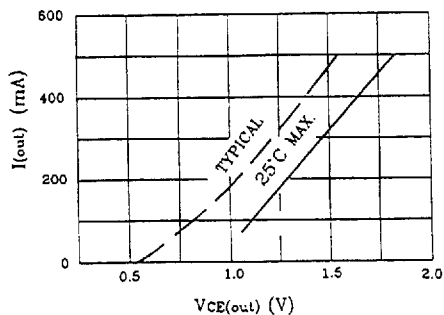

$I_{OUT} - V_{CE(out)}$

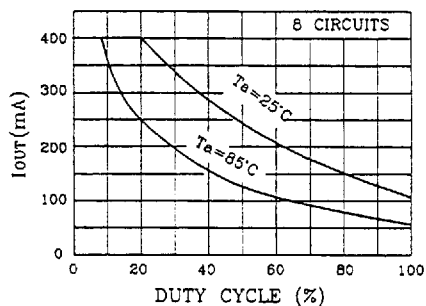

$I_{OUT} - DUTY CYCLE$

