3-Electrode Gas Discharge Tube (GDT)

UN3E7 Series

Description


Gas discharge Tubes (GDT) are classical components for protecting the installations of the telecommunications. It is essential that IT and telecommunications systems -with their high-grade but sensitive electronic circuits - be protected by arresters. They are thus fitted at the input of the power supply system together with varistors and at the connection points to telecommunication lines. They have become equally indispensable for protecting base stations in mobile telephone systems as well as extensive cable television (CATV) networks with their repeaters and distribution systems.

These protective components are also indispensable in other sectors, In AC power transmission systems, they are often used with current-limiting varistors, In customer premises equipment such as DSL modems, WLAN routers, TV sets and cable modems In air-conditioning equipment, the integral black-box concept offers graduated protection by combining arresters with varistors, PTC, diodes and inductor.

UN3E7-XXXHM **UN3E7-XXXH**



Schematic Symbol



a = Tip
b = Ring
e = Ground
(center electrode)

Features

- **u** Non-Radioactive
- **u** RoHS compliant
- **u** Low insertion loss
- **u** Excellent response to fast rising transients
- **u** Ultra low capacitance
- **u** 10KA surge capability tested with 8/20μs pulse as defined by IEC 61000-4-5

Applications

- **u** Communication equipment
- **u** CATV equipment
- **u** Test equipment
- **u** Data lines
- **u** Power supplies
- **u** Telecom SLIC protection
- **u** Broadband equipment
- **u** ADSL equipment, including ADSL2+
- **u** XDSL equipment
- **u** Satellite and CATV equipment
- **u** Consumer electronics

Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E341061

Product Characteristics

Materials	Nickel-plated with Tinplated wires	
Product Marking	**UNION** **XXXH** XXX -Nominal voltage M -20KA	
Glow to Arc Transition Current	~1 Amps	
Glow Voltage	~70 Volts	
Storage and Operational Temperature	-40 to +90°C	
Weight	**UN3E7-XXXHM**	~2.3g
	UN3E7-XXXH	~2.1g
Climatic category (IEC 60068-1)	40/ 90/ 21	


@SOCAY Electronics Co., Ltd. 2014
Specifications are subject to change without notice.
Please refer to www.socay.com for current information.

3-Electrode Gas Discharge Tube (GDT)


UN3E7 Series

Dimensions (Unit: mm)

Radial Leaded Devices (UN3E7-XXXHM)

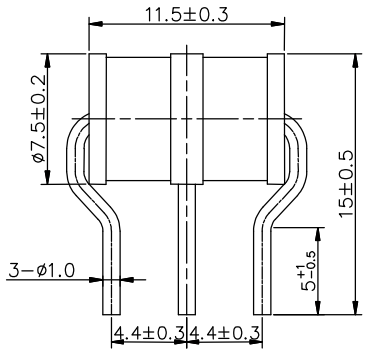

Without wire Devices (UN3E7-XXXH)



Electrical Characteristics

Part Number	Marking	DC Spark-over Voltage	Maximum Impulse Spark-over Voltage		Minimum Insulation Resistance	Maximum Capacitance	Arc Voltage	Service Life			
								Nominal Impulse Discharge Current	Max Impulse Discharge Current	Nominal Alternating Discharge Current	Impulse Life
		@100V/S	@100V/μs	@1KV/μs		@1MHz	@1A	@8/20μs [4] ±5 times	@8/20μs [4] 1 time	@50Hz [4] 1 Sec 10 times	@10/1000μs [4] 300 times
UN3E7-75HM UN3E7-75H	UNION 75H	75V±20%	＜500V	＜600V	1 GΩ (at 25V)	＜1.5pF	~15V	20KA	25KA	20A	200A
UN3E7-90HM UN3E7-90H	UNION 90H	90V±20%	＜500V	＜600V	1 GΩ (at 50V)	＜1.5pF	~15V	20KA	25KA	20A	200A
UN3E7-150HM UN3E7-150H	UNION 150H	150V±20%	＜500V	＜600V	1 GΩ (at 50V)	＜1.5pF	~25V	20KA	25KA	20A	200A
UN3E7-230HM UN3E7-230H	UNION 230H	230V±20%	＜600V	＜700V	1 GΩ (at 100V)	＜1.5pF	~25V	20KA	25KA	20A	200A
UN3E7-250HM UN3E7-250H	UNION 250H	250V±20%	＜600V	＜700V	1 GΩ (at 100V)	＜1.5pF	~25V	20KA	25KA	20A	200A
UN3E7-350HM UN3E7-350H	UNION 350H	350V±20%	＜800V	＜900V	1 GΩ (at 100V)	＜1.5pF	~25V	20KA	25KA	20A	200A
UN3E7-470HM UN3E7-470H	UNION 470H	470V±20%	＜900V	＜1000V	1 GΩ (at 100V)	＜1.5pF	~25V	20KA	25KA	20A	200A
UN3E7-600HM UN3E7-600H	UNION 600H	600V±20%	＜1100V	＜1200V	1 GΩ (at 100V)	＜1.5pF	~25V	20KA	25KA	20A	200A
UN3E7-800HM UN3E7-800H	UNION 800H	800V±20%	＜1200V	＜1400V	1 GΩ (at 100V)	＜1.5pF	~25V	20KA	25KA	20A	200A

Notes:


1). Terms in accordance with ITU-T K.12 and GB/T 9043-2008
2). At delivery AQL 0.65 level Ⅱ, DIN ISO 2859
3). Tip or ring electrode to center electrode
4). Total current through center electrode, half value through tip respectively ring electrode

@SOCAY Electronics Co., Ltd. 2014
Specifications are subject to change without notice.
Please refer to www.socay.com for current information.


3-Electrode Gas Discharge Tube (GDT)

UN3E7 Series


Electrical Rating

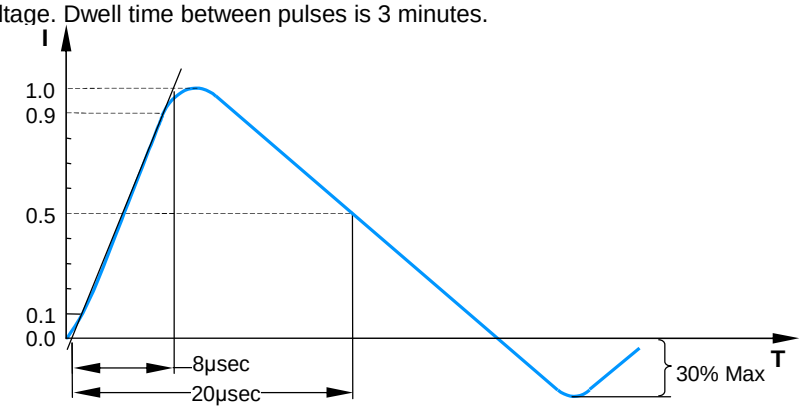Item	Test Condition / Description	Requirement
DC Spark-over Voltage	The voltage is measured with a slowly rate of rise dv / dt=100V/s	To meet the specified value
Impulse Spark-over Voltage	The maximum impulse spark-over voltage is measured with a rise time of dv / dt=100V//μs or 1KV/μs	
Insulation Resistance	The resistance of gas tube shall be measured each terminal each other terminal, please see above spec.	
Capacitance	The capacitance of gas tube shall be measured each terminal to each other terminal. Test frequency :1MHz	
Nominal Impulse Discharge Current	The maximum current applying a waveform of 8/20μs that can be applied across the terminals of the gas tube. One hour after the test is completed, re-testing of the DC spark-over voltage does not exceed ±30% of the nominal DC spark-over voltage. Dwell time between pulses is 3 minutes. 	
Nominal Alternating Discharge Current	Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC spark-over voltage does not exceed ±30% of the nominal DC spark-over voltage. IR > 10^8ohms.	

Recommended soldering profile

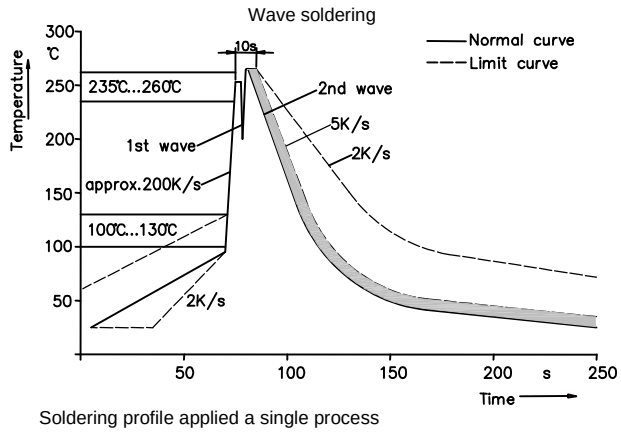

Soldering profile applied a single process

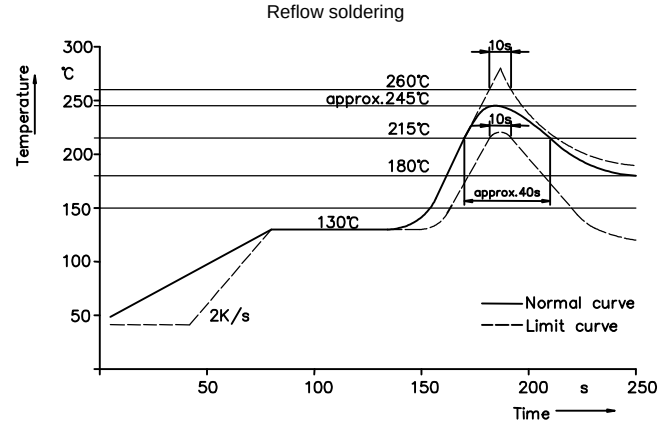

Soldering Parameters - Hand Soldering

Solder Iron Temperature: 350°C +/-5°C
Heating Time: 5 seconds max.

@SOCAY Electronics Co., Ltd. 2014
Specifications are subject to change without notice.
Please refer to www.socay.com for current information.

3-Electrode Gas Discharge Tube (GDT)

UN3E7 Series

Part Numbering


UN3E7 – XXX H M

- M, with wire
- No, without wire
- 8/20μs Level H, 20KA
- Nominal DC Spark-over Voltage
  - 75 = 75V
  - 90 = 90V
  - 150 = 150V
  - 230 = 230V
  - 350=350V
  - 470=470V
  - 600=600V
  - 800=800V
- Series

Packaging

Part Number	Description	Quantity
UN3E7-XXXHM	100PCS per Tray, 10 Trays / Inner Carton	1000
UN3E7-XXXH	100PCS per Tray, 10 Trays / Inner Carton	1000

Tray Dimension (Unit: mm)

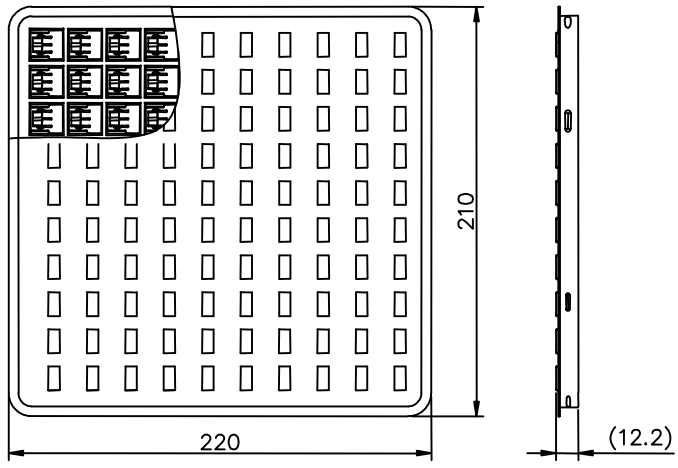

Cautions and warnings

- Gas discharge tubes (GDT) must not be operated directly in power supply networks.
- Gas discharge tubes (GDT) may become hot in case of longer periods of current stress (danger of burning).
- Gas discharge tubes (GDT) may be used only within their specified values. In the event of overload, the head contacts may fail or the component may be destroyed.
- Damaged Gas discharge tubes (GDT) must not be re-used.

@SOCAY Electronics Co., Ltd. 2014
Specifications are subject to change without notice.
Please refer to www.socay.com for current information.