
UR533

LINEAR INTEGRATED CIRCUIT

5A ADJUSTABLE/FIXED ULTRA LOW DROP-OUT LINEAR REGULATOR

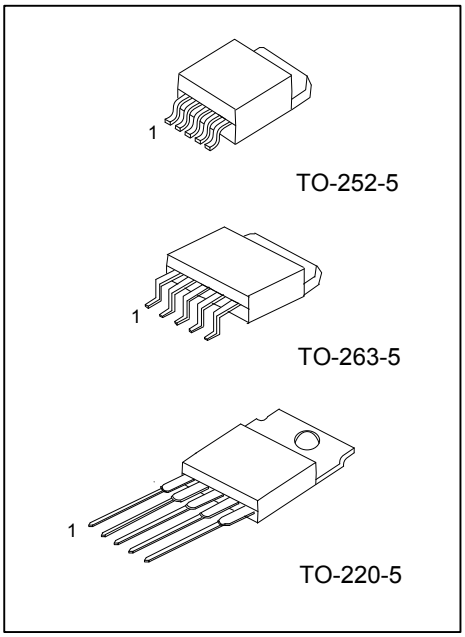

Lead-free: UR533L-xx
Halogen-free: UR533G-xx

■ DESCRIPTION

The UTC **UR533** is ultra-low dropout regulators with 5A output current capability. This device has been optimized for low voltage applications including V_{TT} bus termination, where transient response and minimum input voltage is critical. The UTC **UR533** is ideal for low voltage microprocessor applications requiring a regulated output from 1.3V ~ 5.7V with a power input supply of 1.75V ~ 6.5V.

Current limit ensures controlled short-circuit current. On-chip thermal limiting provides protection against any combination of overload and ambient temperature that would create excessive junction temperatures.

■ FEATURES

* Ultra Low dropout voltage
* Remote sense operation
* Fast transient response
* Load regulation: 0.05% typical
* 0.5% initial accuracy
* On-chip thermal limiting

■ ORDERING INFORMATION

Ordering Number			Package	Packing
Normal	Lead Free	Halogen Free		
UR533-xx-TA5-T	UR533L-xx-TA5-T	UR533G-xx-TA5-T	TO-220-5	Tube
UR533-xx-TN5-R	UR533L-xx-TN5-R	UR533G-xx-TN5-R	TO-252-5	Tape Reel
UR533-xx-TQ5-R	UR533L-xx-TQ5-R	UR533G-xx-TQ5-R	TO-263-5	Tape Reel
UR533-xx-TQ5-T	UR533L-xx-TQ5-T	UR533G-xx-TQ5-T	TO-263-5	Tube

Note: xx: Output Voltage, refer to Marking Information.


UR533L-xx-TA5-R

(1)Packing Type
(2)Package Type
(3)Output Voltage Code
(4)Lead Plating

(1) R: Tape Reel, T:Tube
(2) TA5: TO-220-5, TN5: TO-252-5, TQ5: TO-263-5
(3) xx: refer to Marking Information
(4) G: Halogen Free, L: Lead Free, Blank: Pb/Sn

Copyright © 2009 Unisonic Technologies Co., Ltd


■ MARKING INFORMATION

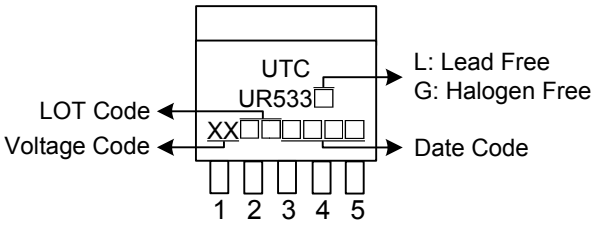PACKAGE	VOLTAGE CODE	MARKING
TO-220-5 TO-252-5 TO-263-5	15 :1.5V 25 :2.5V AD:ADJ	

■ PIN DESCRITIONS

PIN NO.	PIN NAME	DESCRITION
1	V_{SENSE}	Remote Voltage Sense.
2	ADJ/GND	Adjust for **UR533-ADJ**, the output voltage determined by feedback voltage. Ground for fixed output products(**UR533-xx)**
3	V_{OUT}	Output Voltage.
4	V_{CNTL}	Control Voltage.
5	V_{IN}	Input Voltage.

■ BLOCK DIAGRAM

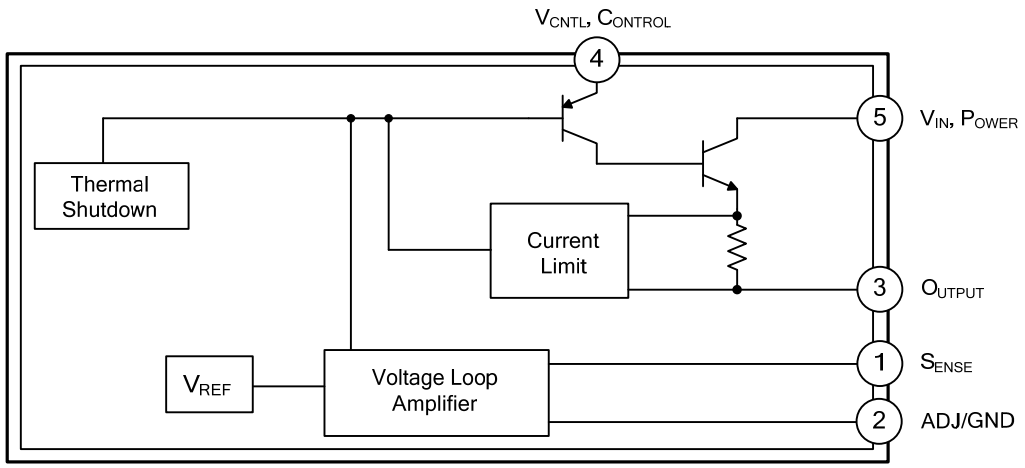

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	7	V
Control Voltage	V_{CNTL}	13.2	V
Operating Junction Temperature	T_{OPR}	-40~+85	°C
Storage Temperature	T_{STG}	-65~+150	°C

Note Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Case	TO-220-5	θ_{JC}	3	°C/W
	TO-252-5		8	°C/W
	TO-263-5		4	°C/W

■ ELECTRICAL CHARACTERISTICS (T_C= 25°C, V_{OUT} = V_S, V_{ADJ} = 0V unless otherwise specified.)

For UR533-AD(Adjustable)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Voltage	V_{REF}	V_{IN} = 2.0V, V_{CNTL} = 2.75V,I_{OUT} = 10mA	1.243	1.250	1.257	V
		2.05V≤V_{IN}≤5.5V,2.7V≤V_{CNTL}≤12V, 10mA≤ I_{OUT}≤5A	1.237	1.250	1.263	V
Output Voltage	V_{OUT}	3V ≤ V_{IN} ≤ 7V, 10mA ≤ I_{OUT} ≤ 5A	V_{REF}	1.5	5.7	V
Line Regulation	ΔV_{OUT}	1.75V≤V_{IN}≤5.5V, 2.5V≤V_{CNTL}≤12V, I_{OUT} = 10mA		1	3	mV
Load Regulation	ΔV_{OUT}	V_{IN} = 2.1V, V_{CNTL} = 2.75V, 10mA≤I_{OUT}≤5A		1	5	mV
Dropout Voltage	V_{CNTL}–V_{OUT}	V_{IN} = 2.05V, ΔV_{REF} = 1%, I_{OUT} = 5A		1.05	1.18	V
	V_{IN} –V_{OUT}	V_{CNTL} = 2.75V, ΔV_{REF} = 1%,I_{OUT} = 5A		0.4	0.5	V
Current Limit	I_{LIMIT}	V_{IN} = 2.05V, V_{CNTL} = 2.75V	5.2			A
Control Pin Current	I_{CTRL}	V_{IN} = 2.05V, V_{CNTL} = 2.75V,I_{OUT} = 10mA		2	6	mA
Adjust Pin Current	I_{ADJ}	V_{IN} = 2.05V, V_{CNTL} = 2.75V		50	120	μA
Minimum Load Current	I_{LOAD}	V_{IN} = 3.3V, V_{CNTL} = 5V		5.0	10	mA
Ripple Rejection	RR	V_{IN} = 3.75V, V_{CNTL} = 3.75V, f = 120Hz, C_{OUT} = 22μF Tantalum, I_{OUT} = 2.5A		80		dB
Thermal Regulation		T_a = 25°C, 30ms pulse		0.002	0.02	%/W
Thermal Shutdown				150		°C

For UR533-xx(Fixed)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	UR533-15	V_{OUT}	3V≤V_{IN}≤7V, 10mA≤I_{OUT}≤5A	1.47	1.5	1.53	V
	UR533-25	V_{OUT}	5.1V≤V_{IN}≤7V, 10mA≤I_{OUT}≤5A	2.474	2.5	2.526	V
Line Regulation		ΔV_{OUT}	1.75V≤V_{IN}≤5.5V, 2.5V≤V_{CNTL}≤12V, I_{OUT} = 10mA		1	3	mV
Load Regulation		ΔV_{OUT}	V_{IN} = 2.1V, V_{CNTL} = 2.75V, 10mA≤I_{OUT}≤5A		1	5	mV
Dropout Voltage		V_{CNTL}–V_{OUT}	V_{IN} = 2.05V, ΔV_{REF} = 1%, I_{OUT} = 5A		1.05	1.18	V
Dropout Voltage		V_{IN} –V_{OUT}	V_{CNTL} = 2.75V, ΔV_{REF} = 1%,I_{OUT} = 5A		0.4	0.5	V
Current Limit		I_{LIMIT}	V_{IN} = 2.05V, V_{CNTL} = 2.75V	5.2			A
Control Pin Current		I_{CTRL}	V_{IN} = 2.05V, V_{CNTL} = 2.75V,I_{OUT} = 10mA		2	6	mA
Minimum Load Current		I_{LOAD}	V_{IN} = 3.3V, V_{CNTL} = 5V		5.0	10	mA
Ripple Rejection		RR	V_{IN} = 3.75V, V_{CNTL} = 3.75V, f = 120Hz, C_{OUT} = 22μF Tantalum, I_{OUT} = 2.5A		80		dB
Thermal Regulation			T_a = 25°C, 30ms pulse		0.002	0.02	%/W
Thermal Shutdown					150		°C


■ TYPICAL APPLICATION CIRCUIT

FOR ADJUSTABLE VERSION

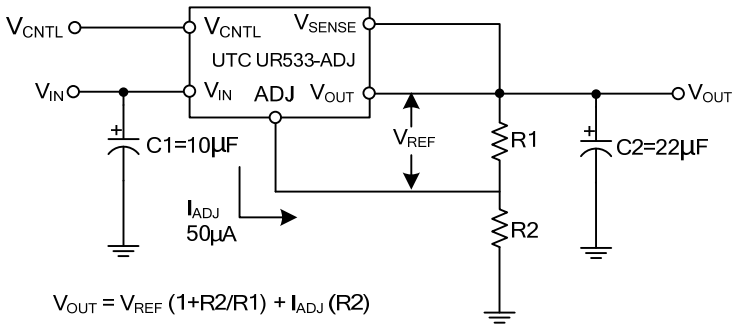

Note: C2 is recommended to use 22µF solid tantalum or 100µF aluminum electrolytic for output stability.


FOR FIXED OUTPUT VERSION

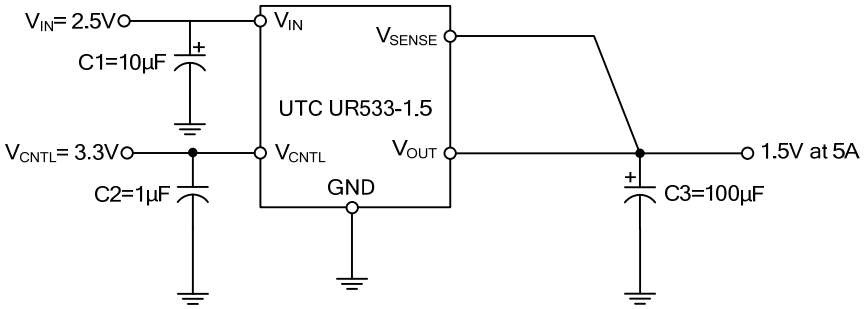


Note: C3 is recommended to use 22µF solid tantalum or 100µF aluminum electrolytic for output stability.

■ TYPICAL PERFOMANCE CHARACTERISTICS


Dropout Voltage vs Output Current

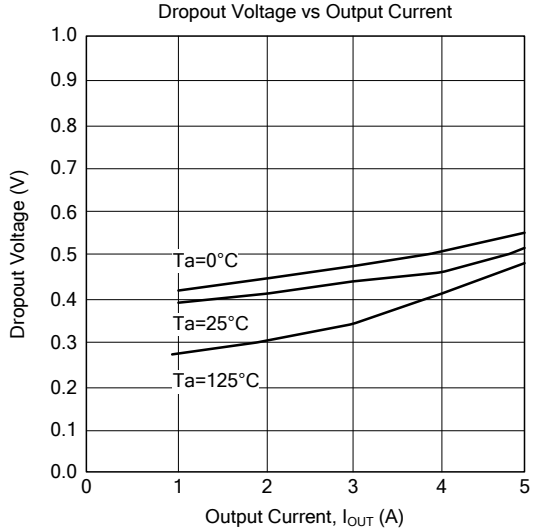


Load Regulation vs Temperature

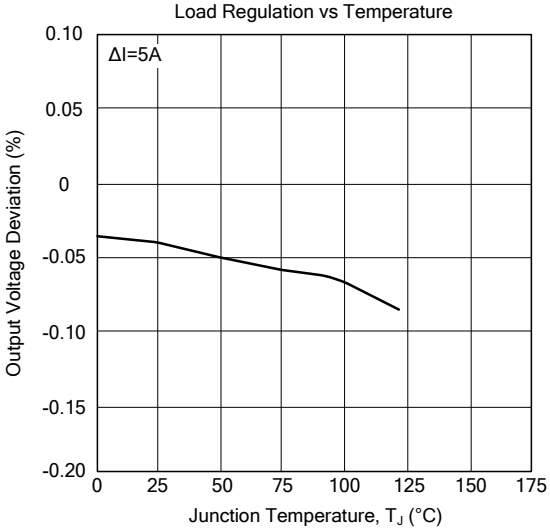


Reference Voltage vs Temperature

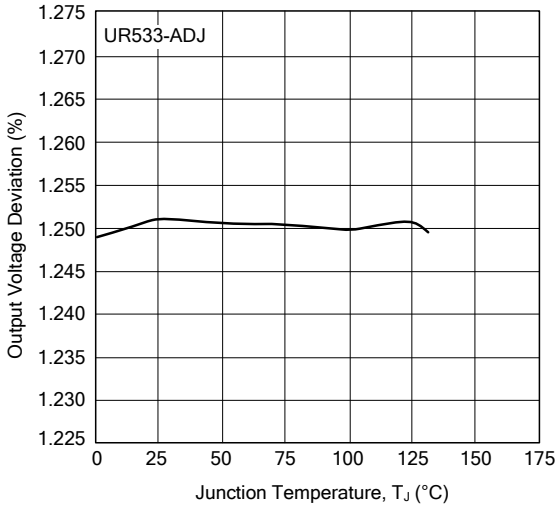

Short-Circuit Current vs Temeperature

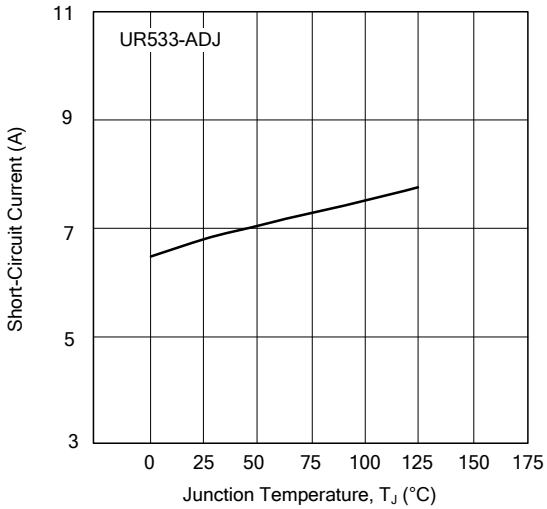

Ripple Rejection vs Frequency

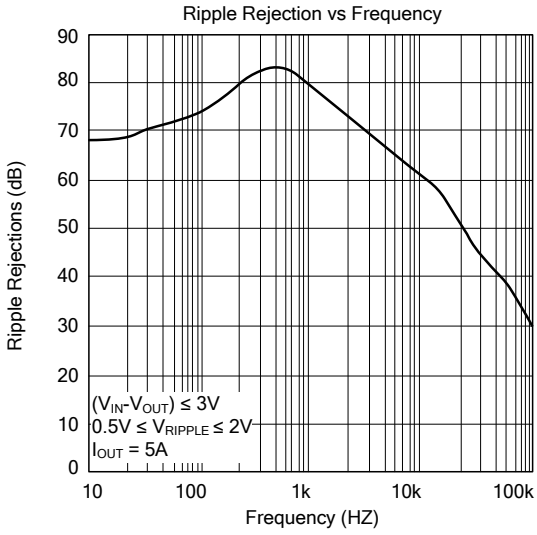

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.