
UR6225

CMOS IC

POSITIVE VOLTAGE REGULATOR

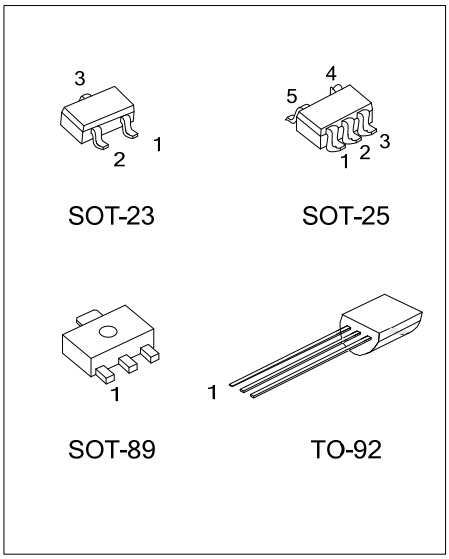

■ DESCRIPTION

The UTC **UR6225** is a positive voltage output, three-pin regulator that provides a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The UTC **UR6225** consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient responses to load variations have improved in comparison to the existing series.

■ FEATURES

* Maximum Output Current: 300mA (Within Max. Power Dissipation, V_{OUT} = 5.0V)
* Output Voltage Range: 1.2V ~ 6.0V in 0.1V Increments (1.2V ~ 1.9V for Custom Products)
* Highly Accurate: Output Voltage ±2%(±1% for Semi-Custom Products)
* Low Power Consumption: Typ. 2.0μA @ V_{OUT}=5.0V
* Output Voltage Temperature Characteristics: Typ. ±100ppm/°C
* Input Stability : Typ. 0.2%/V
* Small Input-Output Differential: I_{OUT} = 100mA @ V_{OUT} = 5.0V with a 0.12V Differential.
* Over Temperature Protection

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment					Packing
Lead Free	Halogen Free		1	2	3	4	5	
UR6225L-xx-AB3-C-R	UR6225G-xx-AB3-C-R	SOT-89	G	I	O	-	-	Tape Reel
UR6225L-xx-AE3-3-R	UR6225G-xx-AE3-3-R	SOT-23	O	G	I	-	-	Tape Reel
UR6225L-xx-AF5-C-R	UR6225G-xx-AF5-C-R	SOT-25	I	G	N	N	O	Tape Reel
UR6225L-xx-AF5-F-R	UR6225G-xx-AF5-F-R	SOT-25	G	I	O	N	N	Tape Reel
UR6225L-xx-T92-C-B	UR6225G-xx-T92-C-B	TO-92	G	I	O	-	-	Tape Box
UR6225L-xx-T92-C-K	UR6225G-xx-T92-C-K	TO-92	G	I	O	-	-	Bulk
UR6225L-xx-T92-C-R	UR6225G-xx-T92-C-R	TO-92	G	I	O	-	-	Tape Reel
UR6225L-xx-T92-B-B	UR6225G-xx-T92-B-B	TO-92	O	G	I	-	-	Tape Box
UR6225L-xx-T92-B-K	UR6225G-xx-T92-B-K	TO-92	O	G	I	-	-	Bulk
UR6225L-xx-T92-B-R	UR6225G-xx-T92-B-R	TO-92	O	G	I	-	-	Tape Reel





Note: Pin Assignment: I:V_{IN} O:V_{OUT} G:V_{SS} N: No Connection
xx: Output Voltage, refer to Marking Information.

UR6225L-xx-AB3-C-R
(1)Packing Type
(2)Pin Assignment
(3)Package Type
(4)Output Voltage Code
(5)Lead Free


(1) R:Tape Reel, K:Bulk, B:Tape Box
(2) refer to Pin Assignment
(3) AB3:SOT-89, AE3:SOT-23, AF5:SOT-25, T92:TO-92
(4) xx:refer to Marking Information
(5) L: Lead Free, G: Halogen Free

Copyright © 2013 Unisonic Technologies Co., Ltd

■ MARKING INFORMATION

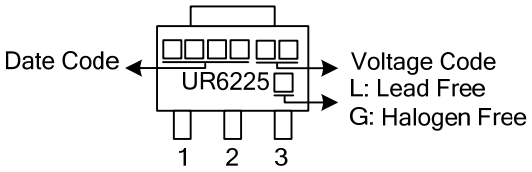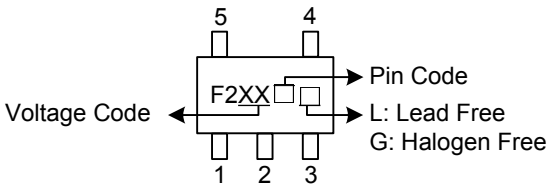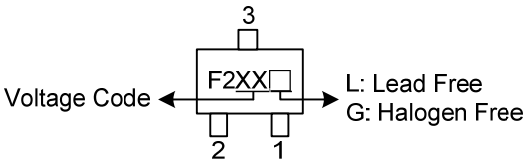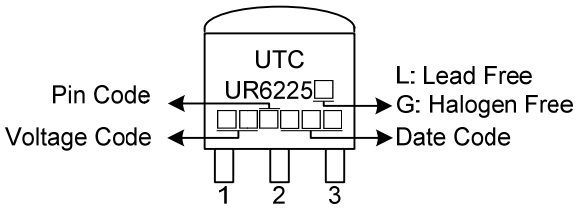PACKAGE	VOLTAGE CODE	MARKING
SOT-89	12:1.2V 13:1.3V 15:1.5V 18:1.8V 20:2.0V 21:2.1V 25:2.5V 26:2.6V 27:2.7V 28:2.8V 2J:2.85V 30:3.0V 33:3.3V 35:3.5V 36:3.6V 38:3.8V 40:4.0V 45:4.5V 50:5.0V 60:6.0V	
SOT-25		
SOT-23		
TO-92		

■ BLOCK DIAGRAM

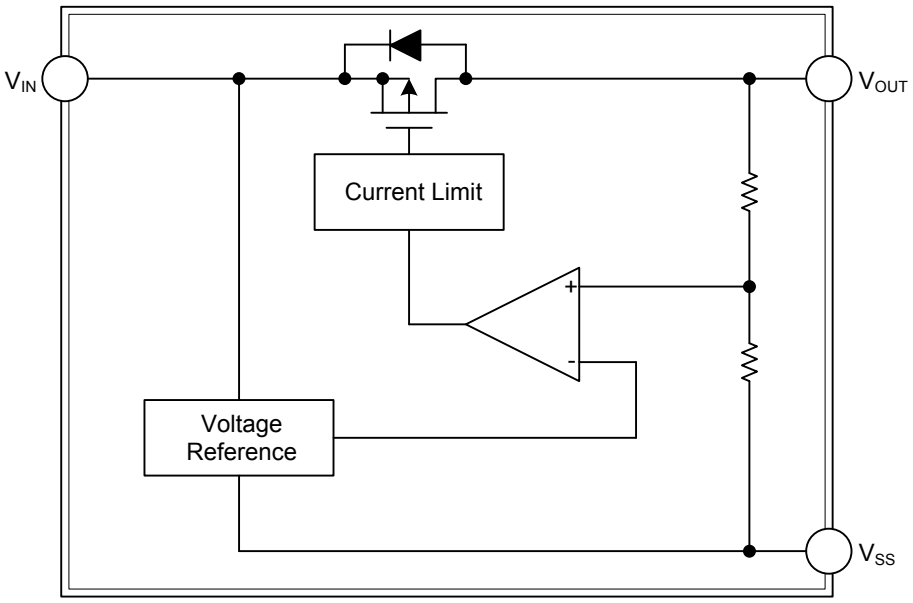

■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage		V_{IN}	10	V
Output Current		I_{OUT}	300	mA
Output Voltage		V_{OUT}	V_{SS}-0.3 ~ V_{IN}+0.3	V
Power Dissipation	SC-23/SOT-25	P_D	250	mW
	SOT-89		500	mW
	TO-92		300	mW
Junction Temperature		T_J	+125	°C
Operating Temperature		T_{OPR}	-40 ~ +85	°C
Storage Temperature		T_{STG}	-40~+125	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (T_A=25°C, unless otherwise specified)

UR6225-6.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA~40mA, V_{IN}=7.0V	5.880	6.000	6.120	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=7.0V, V_{OUT}(E)≥5.4V	250			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=7.0V,1mA≤I_{OUT}≤100mA		40	80	mV
Input-Output Voltage Differential (Note3)	1	V_{DIF}1	I_{OUT}=100mA		120	300	mV
	1	V_{DIF}2	I_{OUT}=200mA		380	600	mV
Supply Current	2	I_{SS}	V_{IN}=7.0V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 7.0V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-5.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA~40mA, V_{IN}=6.0V	4.900	5.000	5.100	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=6.0V, V_{OUT}(E)≥4.5V	250			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=6.0V,1mA≤I_{OUT}≤100mA		40	80	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=100mA		120	300	mV
	1	V_{DIF}2	I_{OUT}=200mA		380	600	mV
Supply Current	2	I_{SS}	V_{IN}=6.0V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 6.0V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

UR6225-4.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$(Note2)	I_{OUT}=50μA~40mA, V_{IN}=5.5V	4.410	4.500	4.59	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=5.5V, $V_{OUT}(E)\geq$4.05V	200			mA
Minimum Load Current		$I_{OUT(MIN)}$	$V_{IN}=V_{OUT}$+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=5.5V,1mA≤I_{OUT}≤100mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	$V_{DIF}1$	I_{OUT}=100mA		170	330	mV
	1	$V_{DIF}2$	I_{OUT}=200mA		400	630	mV
Supply Current	2	I_{SS}	V_{IN}=5.5V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times V_{OUT}}$	I_{OUT}=40mA 5.5V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-4.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$(Note2)	I_{OUT}=50μA~40mA, V_{IN}=5.0V	3.920	4.000	4.080	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=5.0V, $V_{OUT}(E)\geq$3.6V	200			mA
Minimum Load Current		$I_{OUT(MIN)}$	$V_{IN}=V_{OUT}$+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=5.0V,1mA≤I_{OUT}≤100mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	$V_{DIF}1$	I_{OUT}=100mA		170	330	mV
	1	$V_{DIF}2$	I_{OUT}=200mA		400	630	mV
Supply Current	2	I_{SS}	V_{IN}=5.0V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times V_{OUT}}$	I_{OUT}=40mA 5.0V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-3.8V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	$V_{OUT}(E)$(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=4.8V	3.724	3.800	3.876	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=4.8V,$V_{OUT}(E)\geq$3.42V	165			mA
Minimum Load Current		$I_{OUT(MIN)}$	$V_{IN}=V_{OUT}$+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=4.8V, 1mA≤I_{OUT}≤86mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	$V_{DIF}1$	I_{OUT}=86mA		180	360	mV
	1	$V_{DIF}2$	I_{OUT}=172mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=4.8V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN}\times V_{OUT}}$	I_{OUT}=40mA 4.8V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR}\times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

UR6225-3.6V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=4.6V	3.528	3.600	3.672	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=4.6V,V_{OUT}(E)≥3.24V	165			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=4.6V, 1mA≤I_{OUT}≤86mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=86mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=172mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=4.6V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 4.6V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-3.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=4.5V	3.430	3.500	3.570	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=4.5V,V_{OUT}(E)≥3.15V	165			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=4.5V, 1mA≤I_{OUT}≤86mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=86mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=172mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=4.5V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 4.5V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-3.3V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=4.3V	3.234	3.300	3.366	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=4.3V,V_{OUT}(E)≥2.97V	165			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=4.3V, 1mA≤I_{OUT}≤86mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=86mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=172mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=4.3V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 4.3V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

UR6225-3.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=4.0V	2.940	3.000	3.060	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=4.0V,V_{OUT}(E)≥2.7V	150			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=4.0V, 1mA≤I_{OUT}≤80mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=80mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=160mA		400	700	mV
Supply Current	2	Iss	V_{IN}=4.0V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OU}T=40mA 4.0V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-2.85V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA,V_{IN}=3.85V	2.793	2.85	2.907	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=3.85V,V_{OUT}(E)≥2.565V	150			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=3.85V, 1mA≤I_{OUT}≤77mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=77mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=154mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=3.85V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 3.85V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-2.8V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=3.8V	2.744	2.800	2.856	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=3.8V, V_{OUT}(E)≥2.52V	150			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=3.8V, 1mA≤I_{OUT}≤76mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=76mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=152mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=3.8V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 3.8V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

UR6225-2.7V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=3.7V	2.646	2.700	2.754	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=3.7V, V_{OUT}(E)≥2.43V	150			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=3.7V, 1mA≤I_{OUT}≤76mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=76mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=152mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=3.7V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 3.7V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-2.6V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=3.6V	2.548	2.600	2.652	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=3.6V, V_{OUT}(E)≥2.34V	150			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=3.6V, 1mA≤I_{OUT}≤72mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=72mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=144mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=3.6V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 3.6V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-2.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=3.5V	2.45	2.500	2.55	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=3.5V, V_{OUT}(E)≥2.25V	125			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=3.5V, 1mA≤I_{OUT}≤70mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=70mA		180	360	mV
	1	V_{DIF}2	I_{OUT}=140mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=3.5V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 3.5V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

UR6225-2.1V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=3.1V	2.058	2.100	2.142	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=3.1V, V_{OUT}(E)≥1.89V	125			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=3.1V, 1mA≤I_{OUT}≤62mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	$V_{DIF}1$	I_{OUT}=62mA		180	360	mV
	1	$V_{DIF}2$	I_{OUT}=124mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=3.1V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 3.1V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-2.0V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=3.0V	1.960	2.000	2.040	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=3.0V, V_{OUT}(E)≥1.8V	100			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=3.0V, 1mA≤I_{OUT}≤60mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	$V_{DIF}1$	I_{OUT}=60mA		180	360	mV
	1	$V_{DIF}2$	I_{OUT}=120mA		400	700	mV
Supply Current	2	I_{SS}	V_{IN}=3.0V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 3.0V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-1.8V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=2.8V	1.764	1.800	1.836	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=2.8V, V_{OUT}(E)≥1.62V	100			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	$\triangle V_{OUT}$	V_{IN}=2.8V, 1mA≤I_{OUT}≤60mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	$V_{DIF}1$	I_{OUT}=56mA		400	560	mV
	1	$V_{DIF}2$	I_{OUT}=112mA		600	900	mV
Supply Current	2	I_{SS}	V_{IN}=2.8V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 2.8V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

UR6225-1.5V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=2.5V	1.470	1.500	1.530	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=2.5V, V_{OUT}(E)≥1.35V	100			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=2.5V, 1mA≤I_{OUT}≤60mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=56mA		400	600	mV
	1	V_{DIF}2	I_{OUT}=112mA		600	900	mV
Supply Current	2	I_{SS}	V_{IN}=2.5V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 2.5V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-1.3V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=2.3V	1.274	1.300	1.326	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=2.3V, V_{OUT}(E)≥1.17V	100			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=2.3V, 1mA≤I_{OUT}≤60mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=56mA		400	600	mV
	1	V_{DIF}2	I_{OUT}=112mA		600	900	mV
Supply Current	2	I_{SS}	V_{IN}=2.3V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 2.3V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

UR6225-1.2V (Note1)

PARAMETER	CIRCUIT	SYMBOL	TEST CONDITONS	MIN	TYP	MAX	UNIT
Output Voltage	1	V_{OUT}(E)(Note2)	I_{OUT}=50μA ~40mA, V_{IN}=2.2V	1.176	1.200	1.224	V
Maximum Output Current	1	$I_{OUT(MAX)}$	V_{IN}=2.2V, V_{OUT}(E)≥1.08V	100			mA
Minimum Load Current		$I_{OUT(MIN)}$	V_{IN}=V_{OUT}+1V			50	μA
Load Stability	1	△V_{OUT}	V_{IN}=2.2V, 1mA≤I_{OUT}≤60mA		45	90	mV
Input-Output Voltage Differential(Note3)	1	V_{DIF}1	I_{OUT}=56mA		400	600	mV
	1	V_{DIF}2	I_{OUT}=112mA		600	900	mV
Supply Current	2	I_{SS}	V_{IN}=2.2V		2.0	4.5	μA
Input Stability	1	$\frac{\triangle V_{OUT}}{\triangle V_{IN} \times V_{OUT}}$	I_{OUT}=40mA 2.2V≤V_{IN}≤10V		0.2	0.3	%/V
Input Voltage		V_{IN}	I_{OUT}=5mA			10	V
Thermal Shutdown					150		°C
Output Voltage Temperature Characteristics	1	$\frac{\triangle V_{OUT}}{\triangle T_{OPR} \times V_{OUT}}$	I_{OUT}=40mA -40°C≤T_{OPR}≤85°C		±100		ppm/°C

Note: 1. V_{OUT}(T)=Specified Output Voltage.


2. V_{OUT}(E)=Effective Output Voltage (i.e. the output voltage when "V_{OUT}(T)+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

3. V_{DIF}= {V_{IN}1 (Note4) -V_{OUT} (E)}


4. V_{IN}1= The input voltage at the time 98% of V_{OUT}(E) is output (input voltage has been gradually reduced).

■ TEST CIRCUITS


Circuit 1

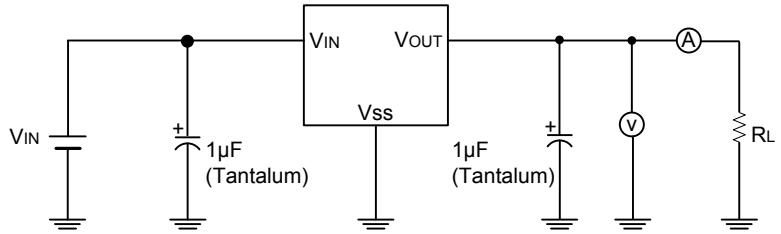

Circuit 2

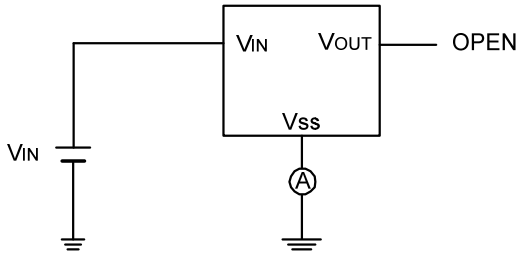


■ TYPICAL APPLICATION CIRCUIT

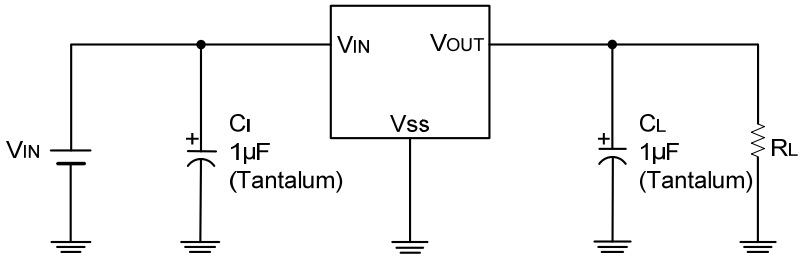


■ TYPICAL CHARACTERISTIC

(1) OUTPUT VOLTAGE VS. OUTPUT CURRENT


UR6225-5.0V

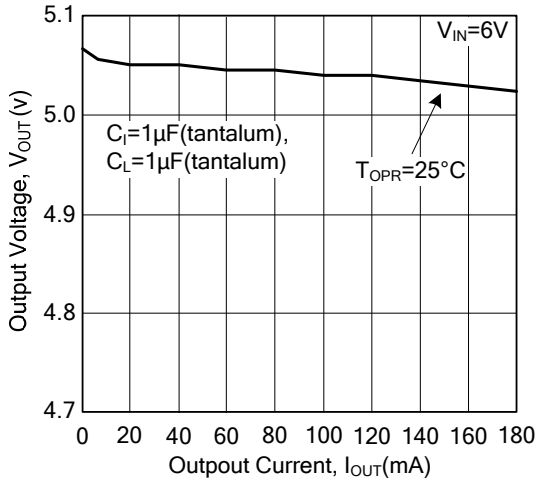


UR6225-3.3V

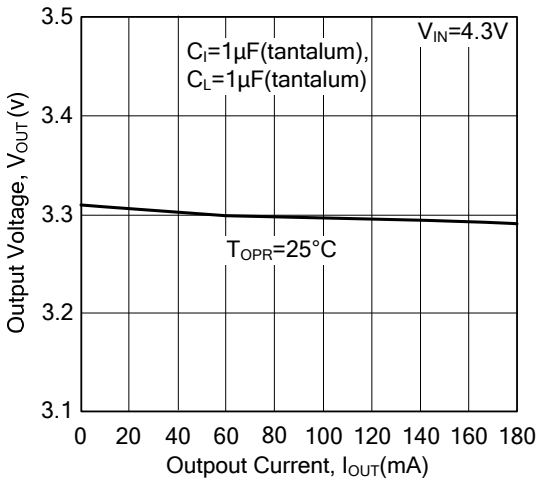

UR6225-2.8V

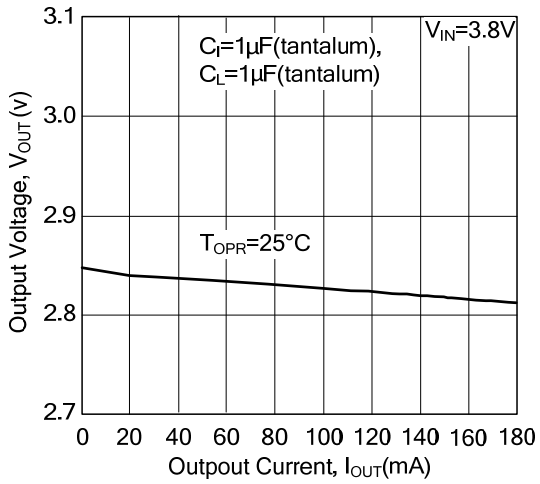


UR6225-1.8V

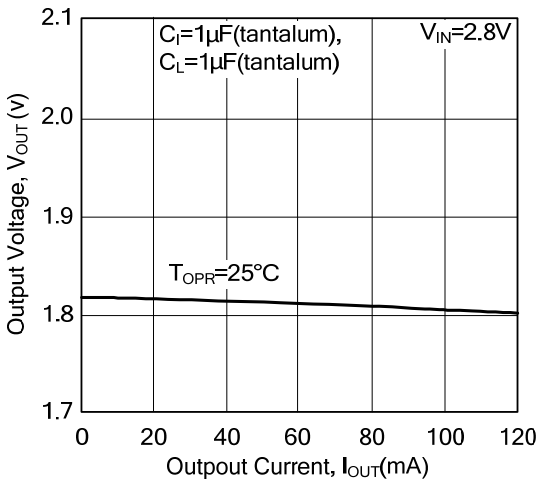


(2) OUTPUT VOLTAGE VS. INPUT VOLTAGE

UR6225-5.0V

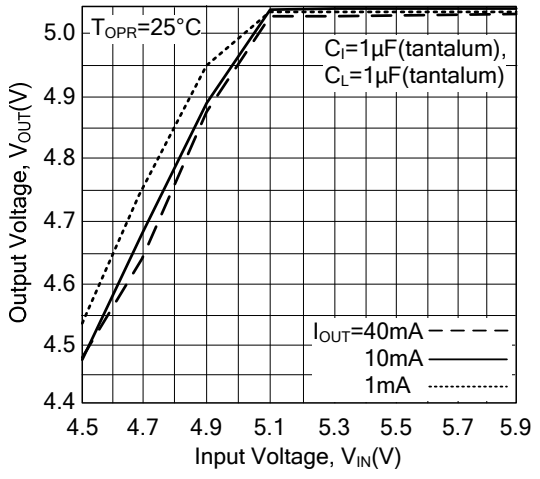


UR6225-5.0V

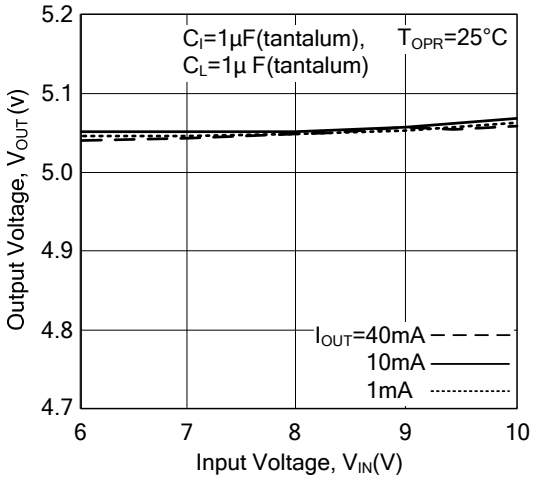


■ TYPICAL CHARACTERISTIC(Cont.)


UR6225-3.3V

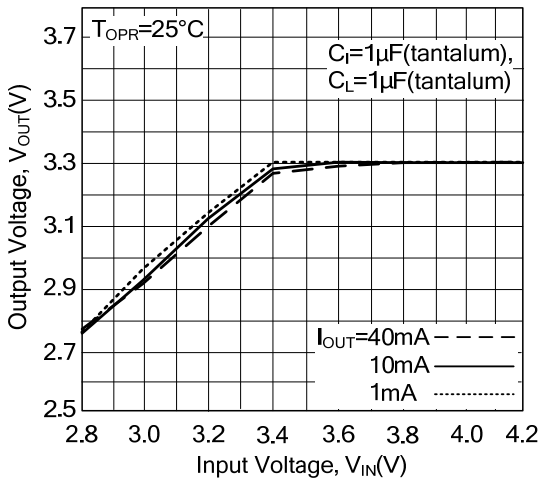


UR6225-3.3V

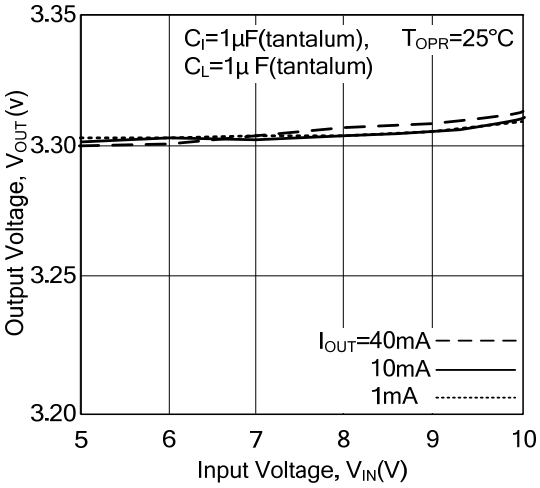


UR6225-2.8V

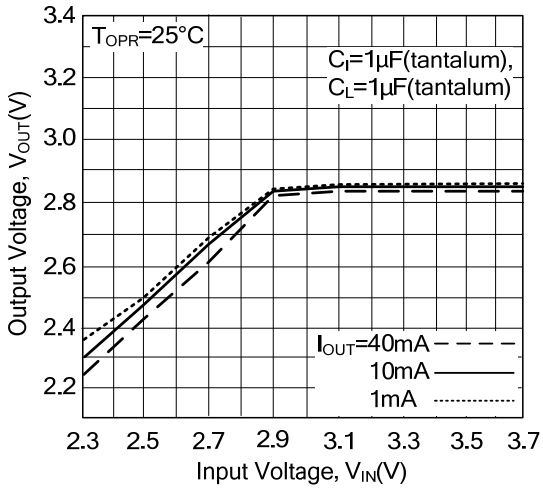


UR6225-2.8V

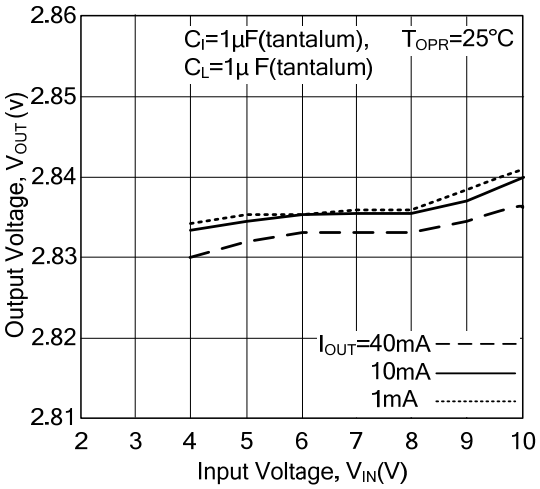

UR6225-1.8V

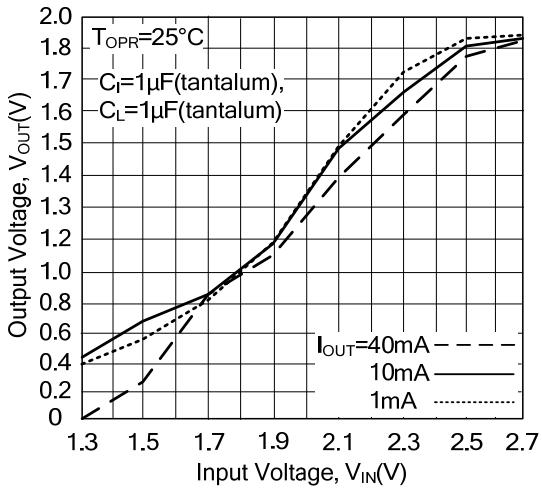


UR6225-1.8V

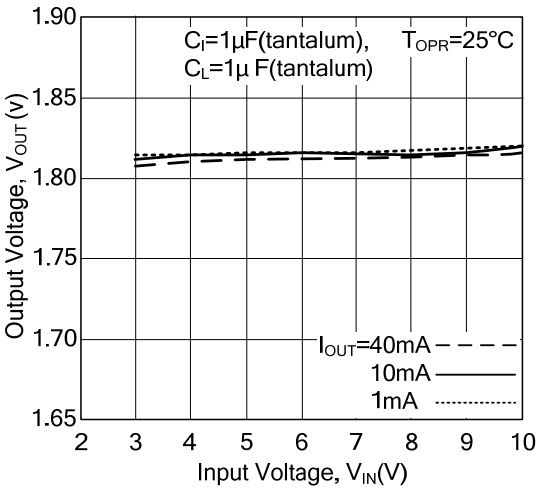


■ TYPICAL CHARACTERISTIC(Cont.)

(3) INPUT/OUTPUT VOLTAGE DIFFERENTIAL VS. OUTPUT CURRENT


UR6225-5.0V

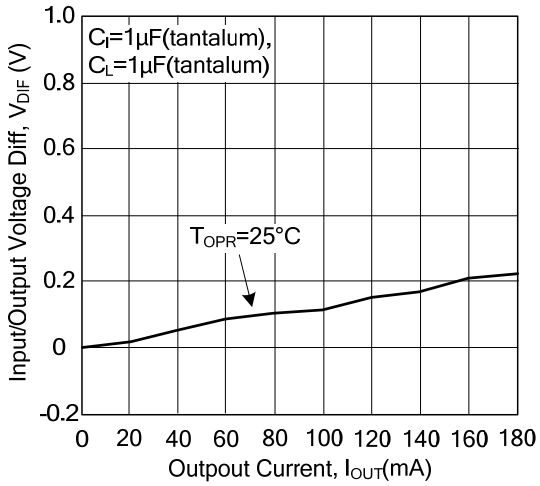


UR6225-3.3V

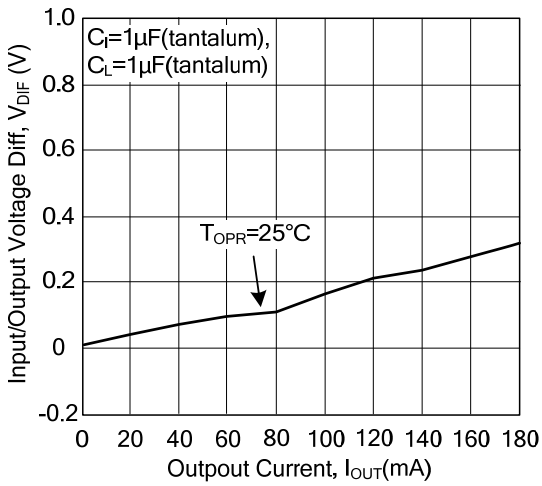

UR6225-2.8V

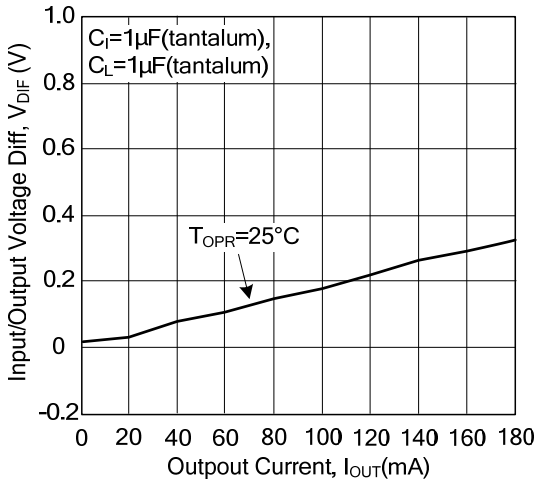


UR6225-1.8V

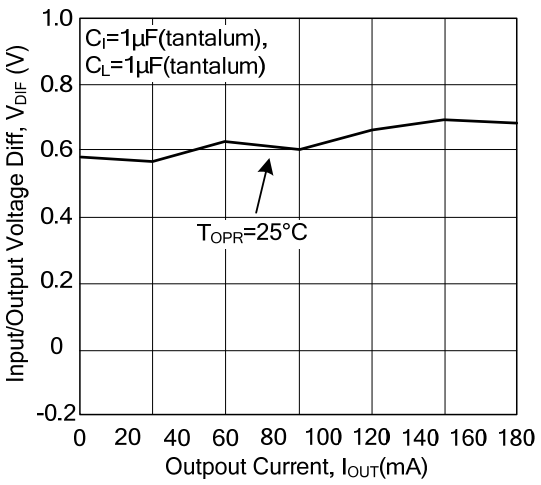


(4) SUPPLY CURRENT VS. INPUT VOLTAGE

UR6225-5.0V

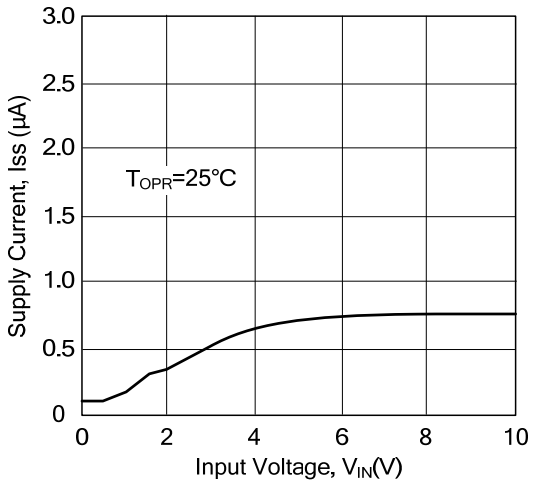


UR6225-5.0V

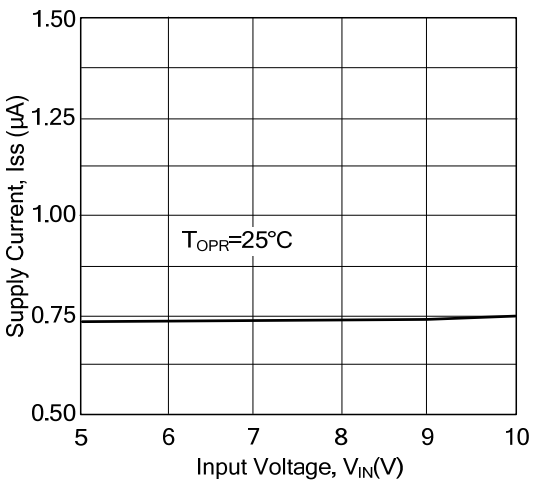


■ TYPICAL CHARACTERISTIC(Cont.)


UR6225-3.3V

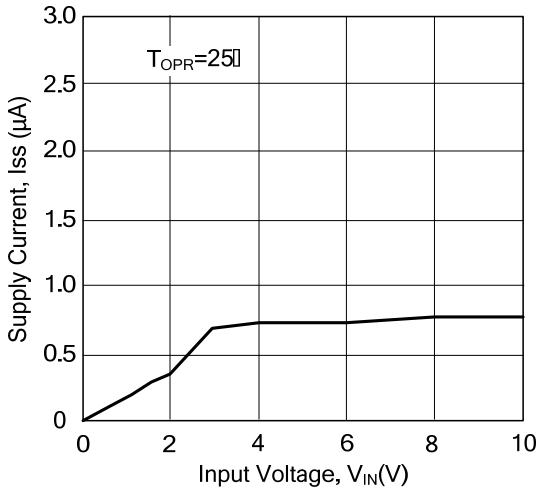


UR6225-3.3V

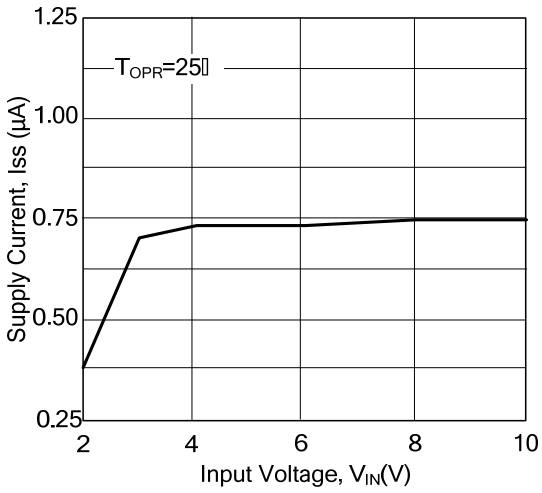


UR6225-2.8V

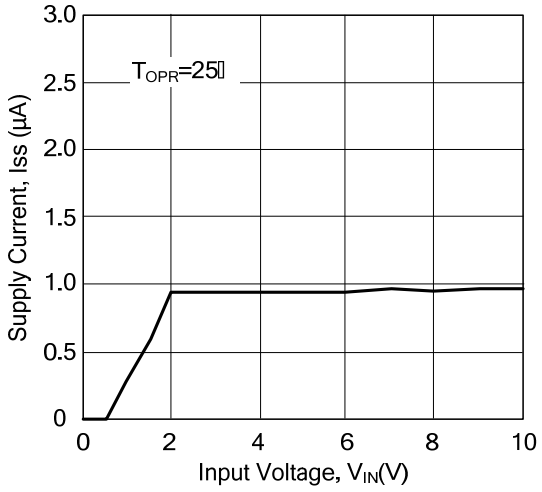


UR6225-2.8V

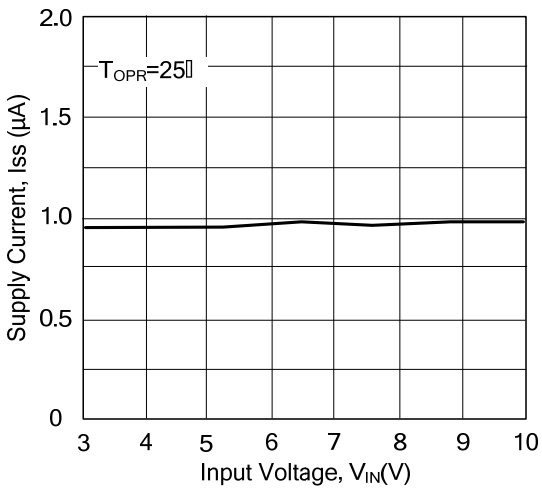

UR6225-1.8V

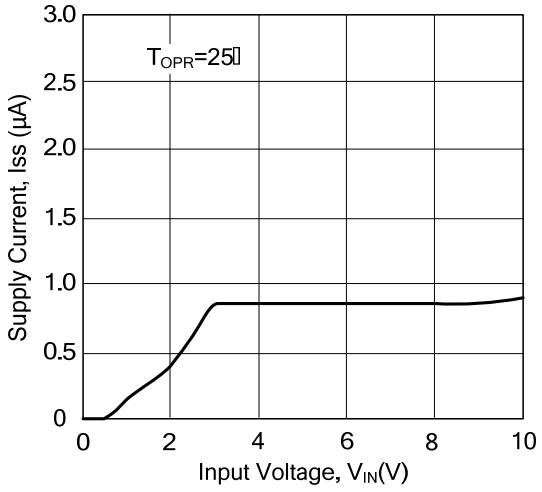


UR6225-1.8V

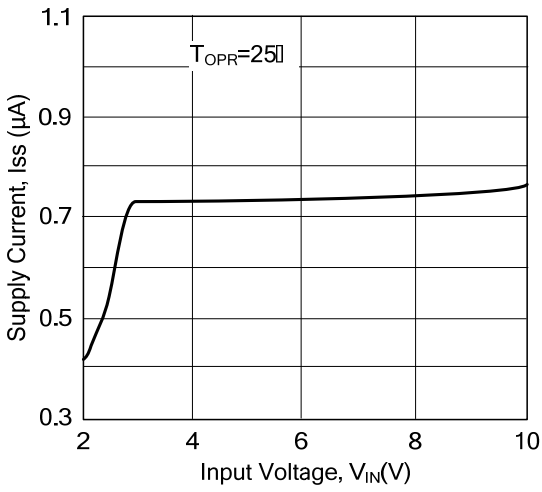

■ TYPICAL CHARACTERISTIC(Cont.)

(5) LOAD TRANSIENT RESPONSE

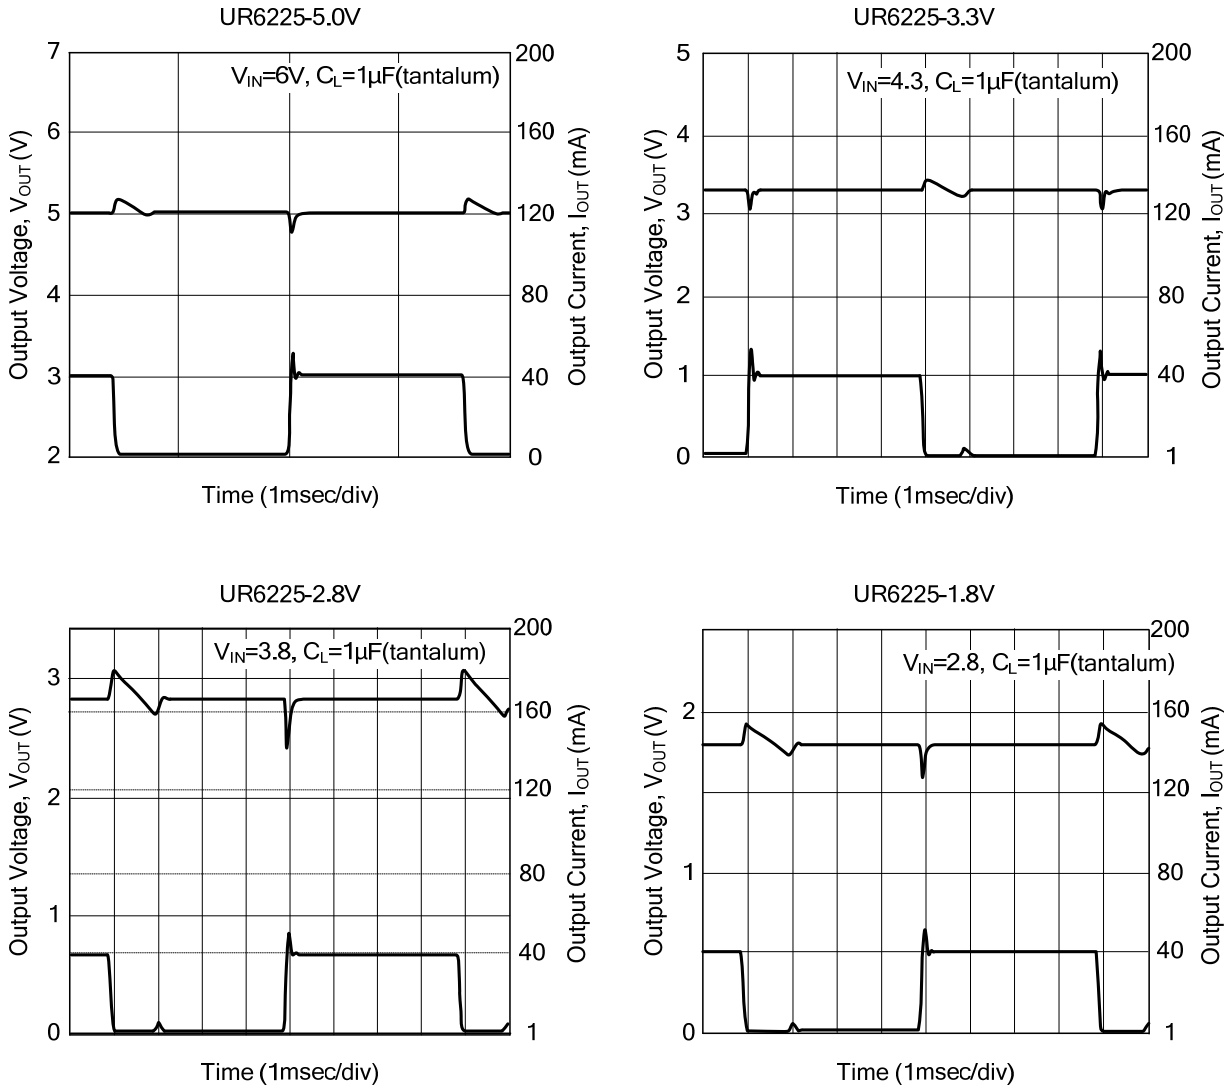

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.