


DC/DC Converter

URF1D_QB-100W Series

MORNSUN®

100W, wide input voltage, isolated & regulated single output DC-DC converter



Patent Protection RoHS

FEATURES

- Wide input voltage range: 66-160V
- High efficiency up to 92%
- Low no-load power consumption
- Isolation voltage: 3K VDC
- Operating temperature range: -40°C to +100°C
- Input under-voltage protection, output short circuit, over-current, over-voltage, over-temperature protection
- International standard: 1/4 brick

URF1D_QB -100W Series is a high performance product designed for the field of railway applications. The DC/DC converters feature 100W output power, no min. load requirement, wide input voltage of 66-160VDC, And allow the high base plate temperature(up to 100°C). The products also provide input under-voltage protection, output over-voltage protection, short-circuit protection, over-temperature protection, remote control and compensation, output voltage regulation functions. And target railway system.

Selection Guide

Part No.	Input Voltage (VDC)		Output		Efficiency (% Typ) @ Full Load	Max. Capacitive Load(μF)
	Nominal (Range)	Max.*	Output Voltage(VDC)	Output Current (mA)(Max./Min.)		
URF1D12QB-100W	110 (66-160)	170	12	8333/0	87/89	6000
URF1D12QB-100WH						
URF1D15QB-100W			15	6667/0	87/89	4700
URF1D15QB-100WH						
URF1D24QB-100W			24	4167/0	90/92	3000
URF1D24QB-100WH						

Note: *Exceeding the maximum input voltage may cause permanent damage.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (no-load / full load)	Nominal input voltage	URF1D12QB-100W(H)	--	5/1021	15/1044	mA
		URF1D15QB-100W(H)	--	5/1021	15/1044	
		URF1D24QB-100W(H)	--	5/988	15/1010	
Reflected Ripple Current	Nominal input voltage		--	50	--	VDC
Surge Voltage (1sec. max.)			-0.7	--	180	
Starting Voltage			--	--	66	
Input Under-voltage Protection			--	58	--	
Starting Time			--	25	--	mS
Input Filter			Pi filter			
Hot Plug			Unavailable			
Ctrl*	Module switch on		Ctrl open circuit or connected to TTL high level (3.5-12VDC)			
	Module switch off		Ctrl connected to -Vin or low level (0-1.2VDC)			
	Input current when switched off		--	2	--	mA

Note: * the voltage of Ctrl pin is relative to input pin -Vin.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Nominal input voltage, 10%-100% load	--	--	±2	%
	Nominal input voltage, 0%-10% load	--	--	±3	
Line Regulation	Full load, the input voltage is from low to high	--	--	±0.3	
Load Regulation	Nominal input voltage, 10%-100% load	--	--	±0.5	

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2017.07.19-A/3 Page 1 of 8

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Transient Recovery Time	25% load step change	--	300	500	μs
Transient Response Deviation		--	±3	±5	%
Temperature Coefficient	Full load	--	--	±0.03	%/°C
Ripple & Noise *	20MHz bandwidth	--	100	300	mVp-p
Trim		-5	--	10	%
Output voltage remote compensation(Sense)		--	--	5	
Output Over-voltage Protection	Input voltage range	110	--	140	%Vo
Output Over-current Protection		110	130	180	%Io
Short-circuit Protection		Continuous, self-recovery			

Note: * The measuring method of ripple and noise, please refer to Fig. 1 .

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output	3000	--	--	VDC
	Input-case	1500	--	--	
	Output-case	1500	--	--	
Insulation Resistance	Input-output, insulation voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	2200	--	pF
Switching Frequency	PFM mode	--	220	--	KHz
MTBF	MIL-HDBK-217F@25°C	500	--	--	K hours

Environmental Specifications

Item		Operating Conditions	Min.	Max.	Unit
Base-Plate Temperature Range		Within the operating temperature curve	-40	+100	°C
Over-temperature Protection		Base- Plate Temperature	--	+115	
Thermal Resistance(R _{th} (B-A))	URF1D_QB-100W	Natural convection	8	--	°C/W
		200LFM convection	6.0	--	
		400LFM convection	5.0	--	
		1000LFM convection	4.0	--	
	URF1D_QB-100WH	Natural convection	5.1	--	
		200LFM convection	2.8	--	
		400LFM convection	2.2	--	
		1000LFM convection	1.8	--	
Storage Humidity		Non-condensing	5	95	%RH
Storage Temperature			-55	+125	°C
Lead Temperature		Welding spot is 1.5mm away from the casing, 10 seconds	--	+300	
Cooling Test			EN60068-2-1		
Dry Heat			EN60068-2-2		
Damp heat			EN60068-2-30		
Shock and Vibration Test			IEC/EN 61373 car body 1 B mold		

Physical Specifications


Casing Material	Black flame-retardant and heat-resistant plastic (UL94 V-0)	
Dimension	Without Heatsink	60.80*39.20*12.70mm
	With Heatsink	62.00*39.20*30.80mm
Weight	Without Heatsink	46g (Typ.)
	With Heatsink	76g (Typ.)
Cooling method	Natural convection or Forced convection	

EMC Specifications


EMI	CE	CISPR32/EN55032	150KHz-30MHz Class B (see Fig. 2-1for recommended circuit)	
	RE	CISPR32/EN55032	30MHz-1GHz Class B (see Fig. 2-1for recommended circuit)	
EMS	ESD	IEC/EN61000-4-2	GB/T17626.2 Contact $\pm 6\text{KV}$, Air $\pm 8\text{KV}$	perf.Criteria B
	RS	IEC/EN61000-4-3	GB/T17626.3 10V/m	perf.Criteria A
	CS	IEC/EN61000-4-6	GB/T17626.6 10Vr.m.s	perf.Criteria A
	EFT	IEC/EN61000-4-4	GB/T17626.4 $\pm 2\text{KV}$ (5KHz, 100KHz)(see Fig. 2-1for recommended circuit)	perf.Criteria B
	Surge	IEC/EN61000-4-5	GB/T17626.5 line to line $\pm 2\text{KV}$ (1.2 $\mu\text{s}/50\mu\text{s}$ 2 Ω),(see Fig.2-1for recommended circuit) line to ground $\pm 4\text{KV}$ (1.2 $\mu\text{s}/50\mu\text{s}$ 12 Ω), (see Fig.2-1 for recommended circuit)	perf.Criteria B
		EN50155	see Fig.2-1for recommended circuit	perf.Criteria B
	Immunities of short interruption	EN50155	100%, 0%, 10ms (see Fig.2-1 for recommended circuit)	perf.Criteria B

Product Characteristic Curves


URF1D12QB-100W Thermal Curves (Vin=110V)

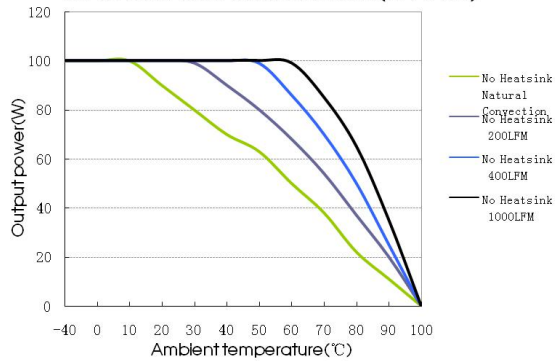


URF1D12QB-100WH Thermal Curves (Vin=110V)

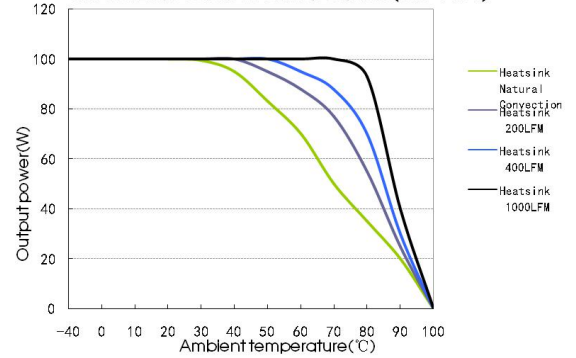


URF1D15QB-100W Thermal Curves (Vin=110V)

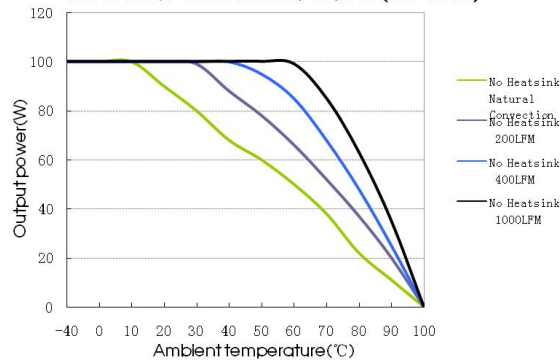


URF1D15QB-100WH Thermal Curves (Vin=110V)


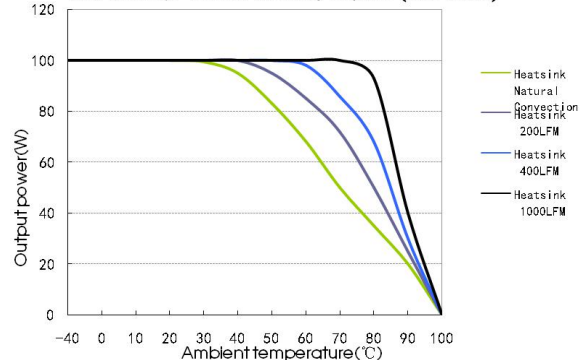


URF1D24QB-100W Thermal Curves (Vin=110V)

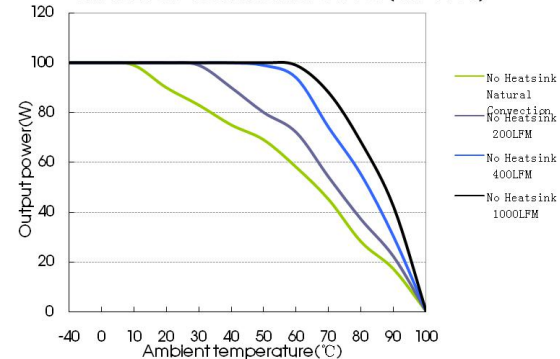

URF1D24QB-100WH Thermal Curves (Vin=110V)

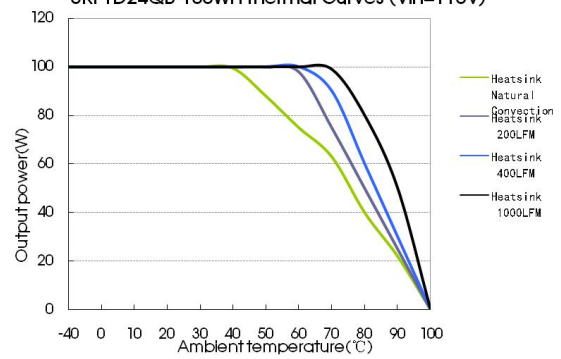

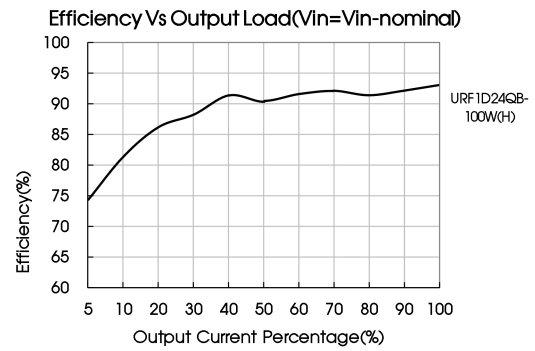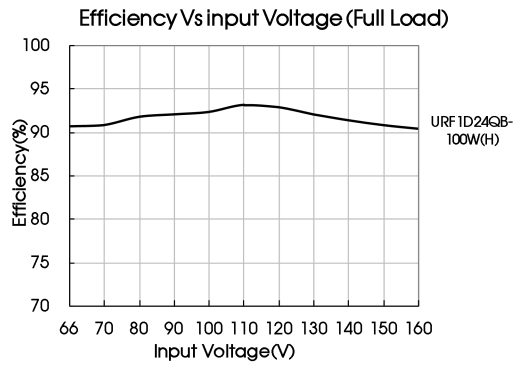


Note:

1. The temperature derating curve and the efficiency curve are typical test values
2. Temperature derating curve in accordance with our laboratory test conditions for testing, the actual use of environmental conditions if the customer is not consistent, to ensure that the product aluminum shell temperature does not exceed 100 °C, can be used within any rated load range.

Sense of application and precautions


1. When not using remote sense

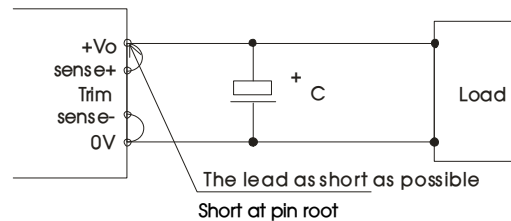

Notes:

- 1) When not using remote sense, make sure + Vo and Sense + are shorted, and that 0V and Sense- are shorted as well;
- 2) Keep the tracks between + Vo and Sense + and 0V and Sense- as short as possible. Avoid a looping track. If noise interferes the loop, the operation of the power module will become unstable.

2. When Remote Sense is used

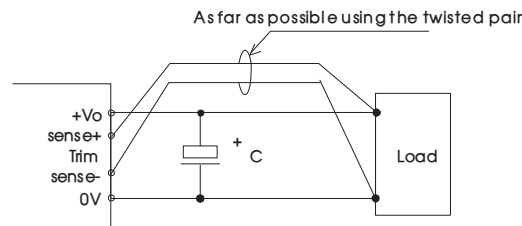

Notes:

1. Using remote sense with long wires may cause output voltage to become unstable. Consult us if long sensing wiring is necessary.
2. Sense tracks or wires should be as short as possible. If using wires, it should not use twisted-pair or shielded wires.
3. Please use wide PCB tracks or a thick wires between the power supply module and the load, the line voltage drop should be kept less than 0.3V. Make sure the power supply module's output voltage remains within the specified range.
4. The impedance of wires may cause the output voltage oscillation or a greater ripple, please do adequate assessments before using.

Design Reference

1. Ripple & noise

All the URF1D_QB-100W series have been tested according to the following recommended test circuit before leaving the factory (see Fig. 1).

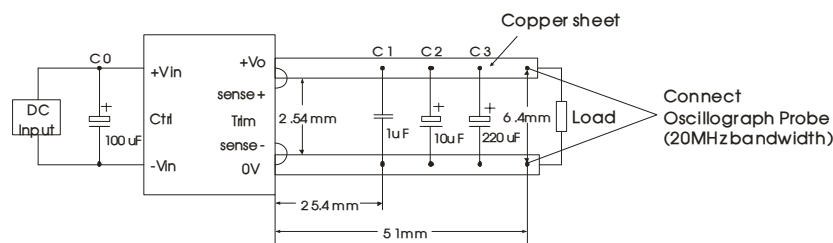


Fig. 1

2. Typical application

If not using our Mornsun's recommended circuit, please ensure an 100 μ F electrolytic capacitors in parallel with the input, which used to suppress the surge voltage come from the input terminal.

If it is required to further reduce input&output ripple, properly increase the input & output of additional capacitors Cin and Cout or select capacitors of low equivalent impedance, provided that the capacitance is no larger than the max. capacitive load of the product.



Capacitive Parameter	Cout(μ F)	Cin(μ F)
Output Voltage		
12VDC	220	100
15VDC		
24VDC		

3. EMC solution-module recommended circuit

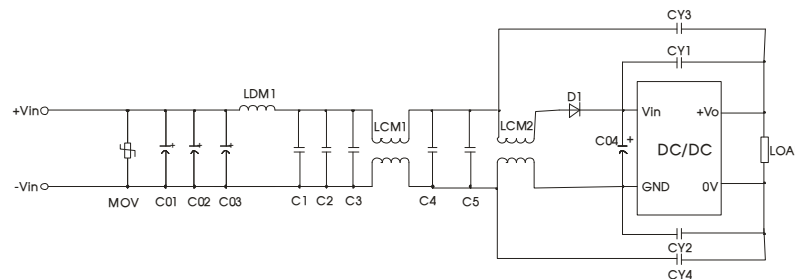


Fig. 2-1

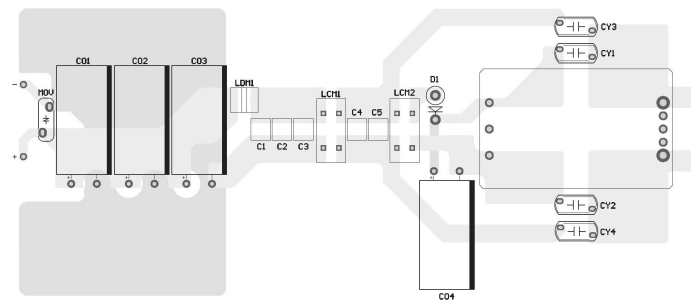


Fig. 2-2

MOV	S20K130(Varistor)
C01、C02、C03、C04	100uF/400V(electrolytic capacitor)
LDM1	10uH(Shielded inductor)
C1、C2、C3、C4、C5	2.2uF/250V
D1	SF306
CY1、CY2、CY3、CY4	2200 pF /400VAC (Y safety capacitor)
LCM1	FL2D-30-222
LCM2	FL2D-30-472

4. Thermal design

The maximum operating temperature of base-plate TB is 100 $^{\circ}$ C, as long as the user's thermal system keeps TB <100 $^{\circ}$ C, the converter can deliver its full rated power. A power derating curve can be calculated for any heatsink that is attached to the base-plate of the converter. It is open airflow rate. This information is usually available from the heatsink vendor. The following formula can be used to determine the maximally necessary to determine the thermal resistance, Rth(B-A), of the chosen heatsink between the base-plate and the ambient air for a given power the converter can dissipate for a given thermal condition if its base-plate is to be no higher than 100 $^{\circ}$ C.


$$P_{diss}^{max} = \frac{100^{\circ}\text{C} - T_A}{R_{th(B-A)}} \quad (T_A \text{ is ambient temperature, } R_{th(B-A)} \text{ is thermal resistance of base-plate, } P_{diss}^{max} \text{ is max dissipation power})$$

The maximum load operating power of power supply module at a certain ambient temperature can be calculated by the power dissipation, Formula is as follows:

$$P_{o\max} = \frac{P_{\text{diss}}^{\max}}{\left(\frac{1}{\eta} - 1\right)} \quad (\eta \text{ is converter efficiency})$$

Therefore, customers can according to the actual application to choose the right heatsink.

5. Application of Trim and calculation of Trim resistance

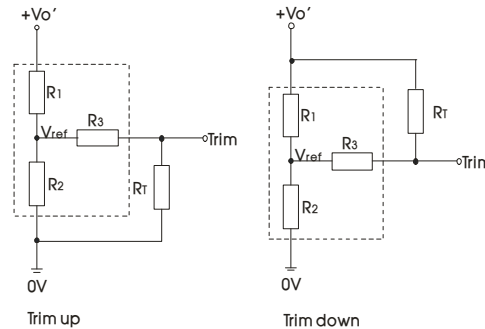

Applied circuits of Trim (Part in broken line is the interior of models)

Calculation formula of Trim resistance:

$$\begin{aligned} \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{\text{ref}}}{V_{o'} - V_{\text{ref}}} \cdot R_1 \\ \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_{o'} - V_{\text{ref}}}{V_{\text{ref}}} \cdot R_2 \end{aligned}$$

table 1

Vo	12(VDC)	15(VDC)	24(VDC)
Parameter			
R1(KΩ)	11	14.49	24.87
R2(KΩ)	2.87	2.87	2.87
R3(KΩ)	15	15	20
Vref(V)	2.5	2.5	2.5


Note:

Value for R1, R2, R3, and Vref refer to the above table 1. RT: Resistance of Trim. α: User-defined parameter, no actual meanings. Vo': The trim up/down voltage.


6. It is not allowed to connect modules output in parallel to enlarge the power

7. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout (without heatsink)

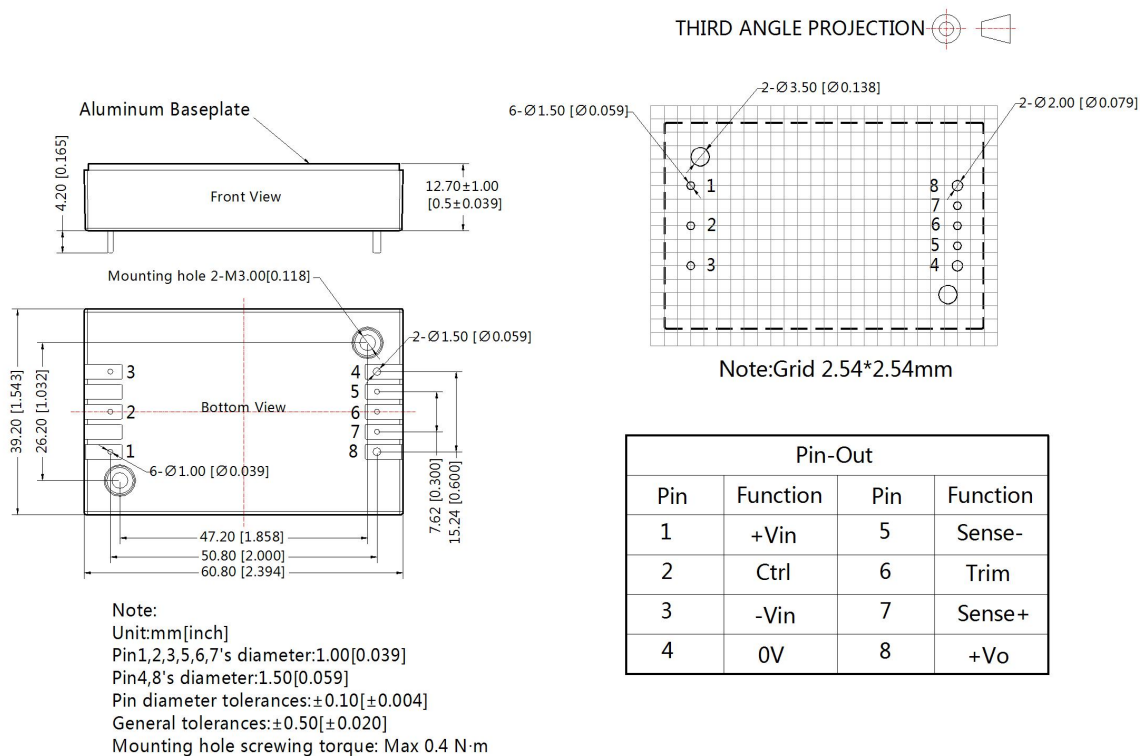

Dimensions and Recommended Layout(with heatsink)

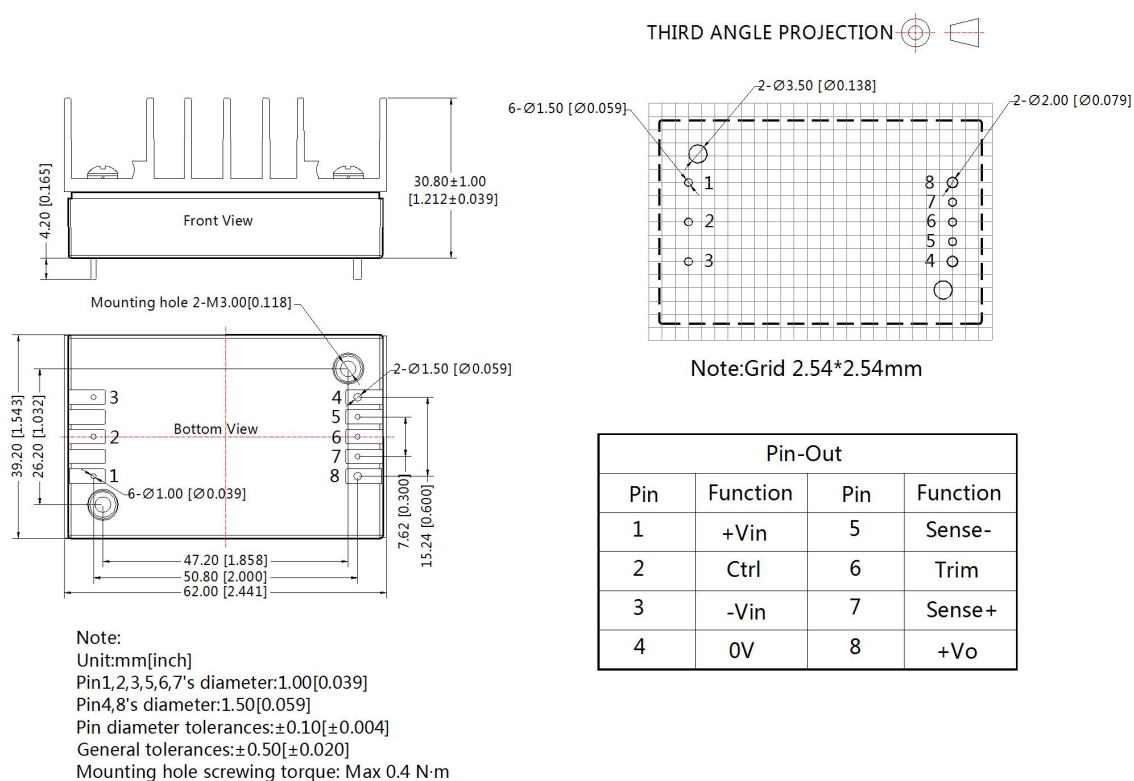

Note

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58010113(without heatsink), 58220017(with heatsink);
2. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. If the customer tests EMC, suggest to take our recommended circuit. If the customer needs to meet the performance aspects of the surge, and don't take our recommended circuit, please make sure the surge residual voltage is less than 180V, to ensure the reliability of the product;
5. Recommends that customers plus silicone film or thermal grease between the module and the heatsink, in order to ensure good heat dissipation;
6. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
7. All index testing methods in this datasheet are based on Company's corporate standards;
8. We provide product customization service and match filter module, please directly contact our technicians for specific information;
9. Specifications of this product are subject to changes without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn