
UT2305

Power MOSFET

4.2A, 20V P-CHANNEL POWER MOSFET

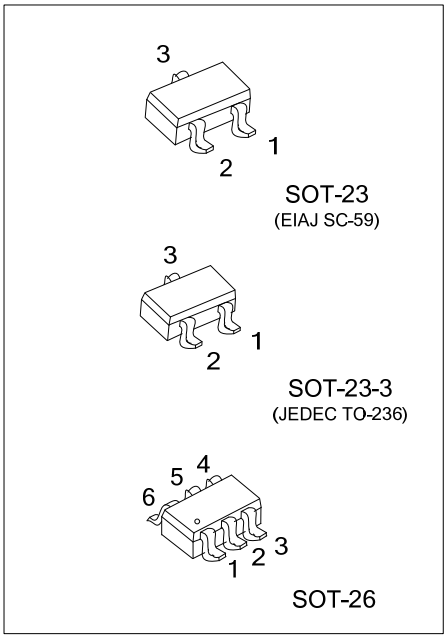


■ DESCRIPTION

The UTC **UT2305** is P-channel enhancement mode power MOSFET, designed in serried ranks. With fast switching speed, low on-resistance, favorable stabilization.

Used in commercial and industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

■ SYMBOL





■ ORDERING INFORMATION

Ordering Number	Package	Pin Assignment						Packing
		1	2	3	4	5	6	
UT2305G-AE2-R	SOT-23-3	S	G	D	-	-	-	Tape Reel
UT2305G-AE3-R	SOT-23	S	G	D	-	-	-	Tape Reel
UT2305G-AG3-R	SOT-26	D	D	G	S	D	D	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UT2305G-AE3-R (1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) AE2: SOT-23-3, AE3: SOT-23, AG6: SOT-26 (3) G: Halogen Free and Lead Free

■ MARKING

SOT-23 / SOT-23-3	SOT-26
	

Copyright © 2015 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATING	UNITS
Drain-Source Voltage		V_{DS}	- 20	V
Gate-Source Voltage		V_{GS}	± 12	V
Continuous Drain Current (Note 3) (T_A=25°C)		I_D	-4.2	A
Pulsed Drain Current (Note 1, 2)		I_{DM}	-10	A
Power Dissipation (T_A=25°C)	SOT-23-3	P_D	0.83	W
	SOT-23		1.38	W
	SOT-26		1.1	W
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATING	UNIT
Junction to Ambient (Note 3)	SOT-23-3	θ_{JA}	150	°C/W
	SOT-23		90	°C/W
	SOT-26		110	°C/W


■ ELECTRICAL CHARACTERISTICS (T_J=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V, I_D=-250μA	-20			V
Drain-Source Leakage Current	I_{DSS}	V_{DS}=-20V, V_{GS}=0V			-1	μA
Gate-Source Leakage Current	I_{GSS}	V_{GS}=±12V, V_{DS}=0V			±100	nA
Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	Reference to 25°C, I_D=-1mA		-0.1		V/°C
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	V_{DS}=V_{GS}, I_D=-250uA	-0.5		-1.2	V
Drain-Source On-State Resistance (Note 2)	$R_{DS(ON)}$	V_{GS}=-10V, I_D=-4.5A			53	mΩ
		V_{GS}=-4.5V, I_D=-4.2A			65	mΩ
		V_{GS}=-2.5V, I_D=-2.0A			100	mΩ
		V_{GS}=-1.8V, I_D=-1.0A			250	mΩ
DYNAMIC CHARACTERISTICS						
Input Capacitance	C_{ISS}	V_{GS}=0V, V_{DS}=-15V, f=1MHz		900		pF
Output Capacitance	C_{OSS}			116		pF
Reverse Transfer Capacitance	C_{RSS}			120		pF
SWITCHING CHARACTERISTICS						
Turn-ON Delay Time (Note 2)	$t_{D(ON)}$	V_{DS}=-15V, V_{GS}=-10V, I_D=-1A, R_G=6Ω, R_D=15Ω		12		ns
Turn-ON Rise Time	t_R			36		ns
Turn-OFF Delay Time	$t_{D(OFF)}$			326		ns
Turn-OFF Fall Time	t_F			200		ns
Total Gate Charge (Note 2)	Q_G	V_{DS}=-16V, V_{GS}=-4.5V, I_D=-4.2A		30		nC
Gate-Source Charge	Q_{GS}			5		nC
Gate-Drain Charge	Q_{GD}			2.5		nC
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source Diode Forward Voltage(Note2)	V_{SD}	V_{GS}=0V, I_S=-1.2A			-1.2	V
Reverse Recovery Time	t_{rr}	V_{GS}=0V, I_S=-4.2A, dI/dt=100A/μs		27.7		ns
Reverse Recovery Charge	Q_{RR}			22		nC


Notes: 1. Pulse width limited by $T_{J(MAX)}$
2. Pulse width ≤300μs, duty cycle≤2%.
3. Surface mounted on 1 in^2 copper pad of FR4 board; 270°C/W when mounted on min.

■ TYPICAL CHARACTERISTICS


Typical Output Characteristics

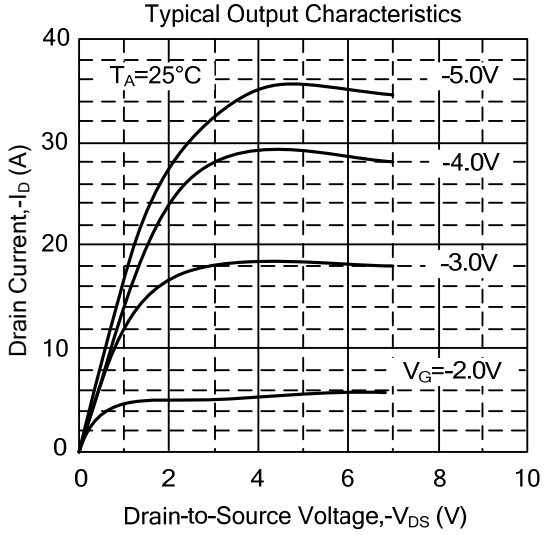


Typical Output Characteristics

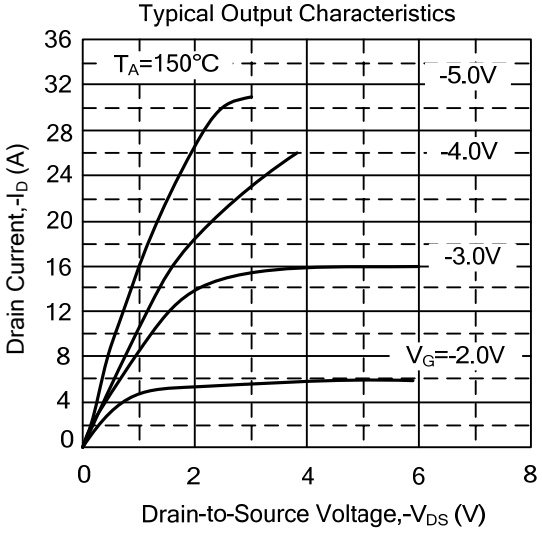


On-Resistance v.s. Gate Voltage

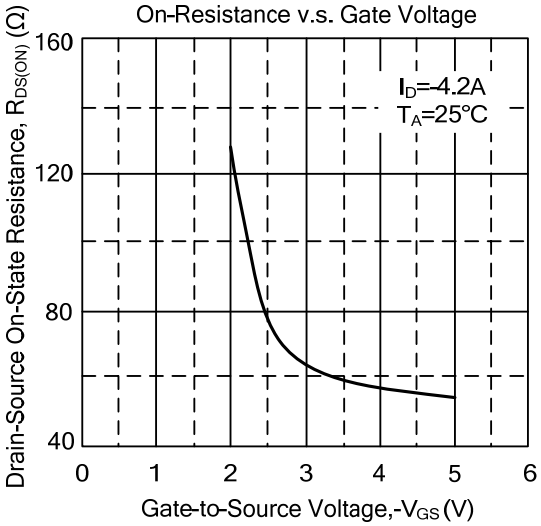


Forward Characteristics of Reverse Diode

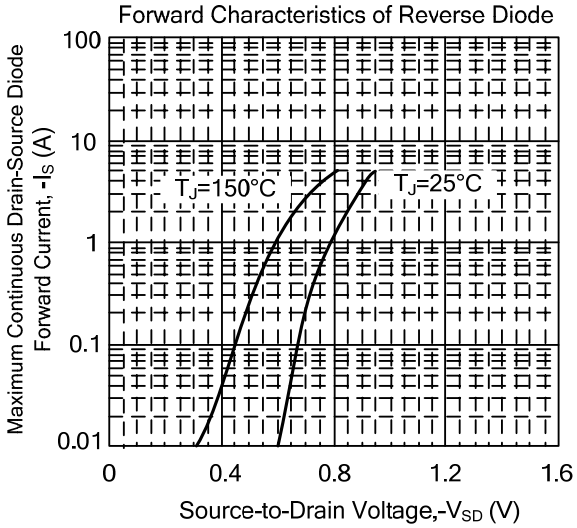


Gate Charge Characteristics

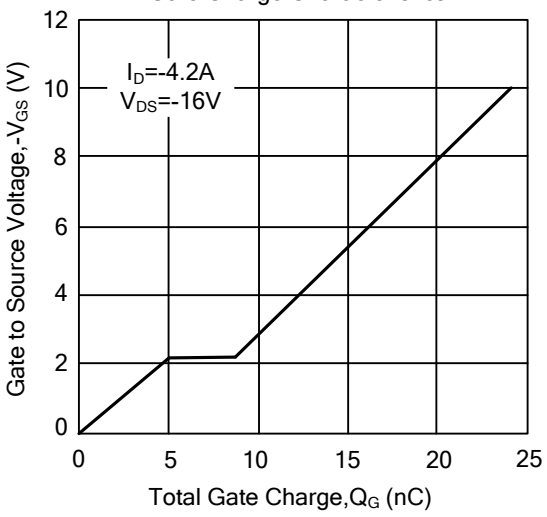



Typical Capacitance Characteristics

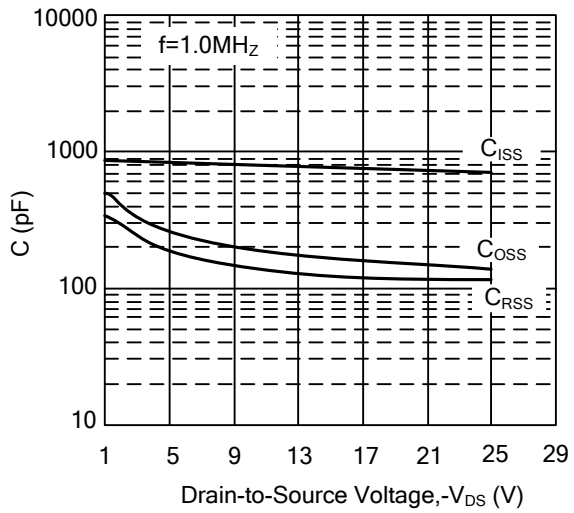


■ TYPICAL CHARACTERISTICS(Cont.)

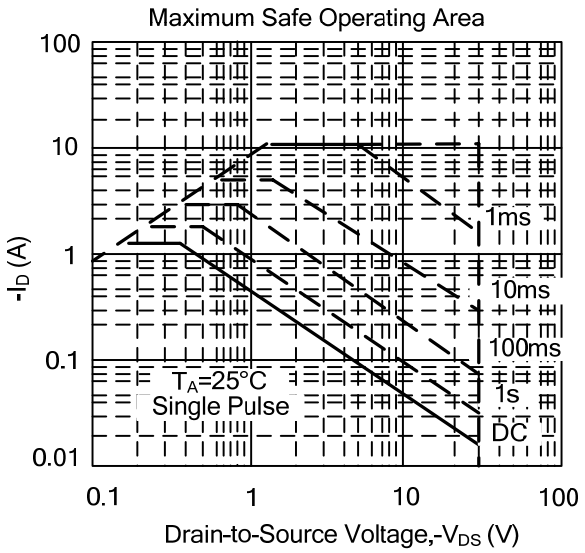

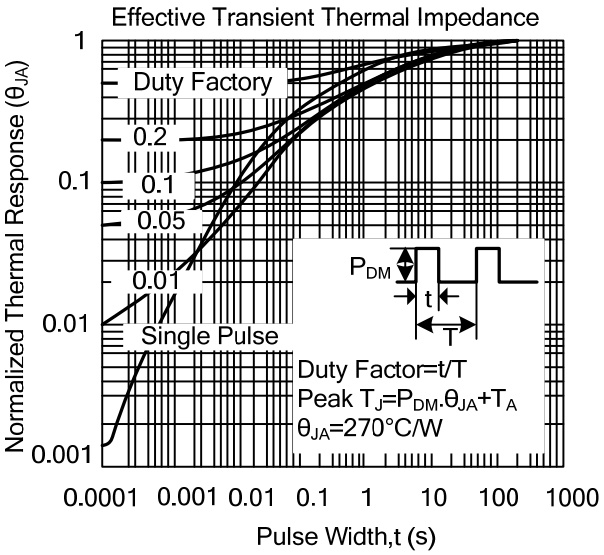

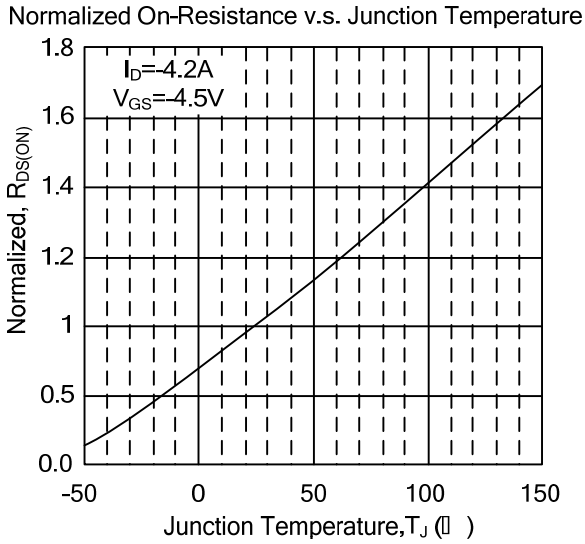

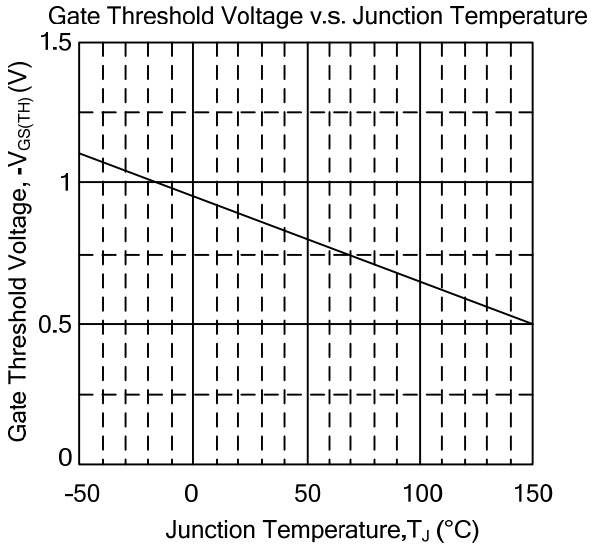

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.