RECTIFIERS
Standard Recovery, 1 Amp to 2 Amp

UT236-UT347
UT249-UT363
UT251-UT364
UT261-UT268

2

FEATURES
- Continuous Rating: to 2A
- Controlled Avalanche
- Surge Rating: to 30A
- PIV: to 1000V
- Miniature Package

DESCRIPTION
These miniature power rectifiers offer the user extreme reliability for high-rel military supplies.


ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage	1 Amp Series	1.25 Amp Series	1.5 Amp Series	2 Amp Series
100V	UT236	UT249	UT251	UT261
200V	UT234	UT242	UT252	UT262
400V	UT235	UT244	UT254	UT264
500V	UT237	UT245	UT255	UT265
600V	UT238	UT247	UT257	UT267
800V	UT361	UT362	UT258	UT268
1000V	UT347	UT363	UT364	

	1 AMP SERIES	1.25 AMP SERIES	1.5 AMP SERIES	2 AMP SERIES
Maximum Average D.C. Output Current				
@ T_A = 25°C	1.0A	1.25A	1.5A	2.0A
@ T_A = 100°C	0.5A	0.65A	0.75A	1.0A
Non-Repetitive Sinusoidal Surge (8.3ms)	20A	20A	25A	30A
Operating Temperature Range	—195°C to +175°C			
Storage Temperature Range	—195°C to +175°C			
Thermal Resistance	See lead temperature derating curve			

MECHANICAL SPECIFICATIONS

UT236-UT347 UT249-UT363 UT251-UT364 UT261-UT268

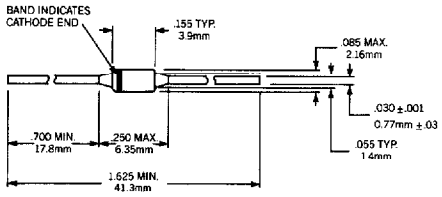

Part Identification: Orange band indicates "UT." Part number printed on body.
Polarity: Denoted by orange band.
Weight: 0.26 grams, typical.

BODY A




THESE DEVICES ALSO AVAILABLE IN SURFACE MOUNT PACKAGE. SEE SECTION 10

Microsemi Corp.
Watertown
The diode experts


ELECTRICAL SPECIFICATIONS (at 25°C unless noted)

Type	PIV	Maximum Forward Voltage Drop	Maximum Leakage Current @ PIV	
			25°C	100°C
UT261	100V	1V @ 900mA	2μA	75μA
UT262	200V			
UT264	400V			
UT265	500V			
UT267	600V			
UT268	800V			
UT251	100V	1V @ 750mA	2μA	75μA
UT252	200V			
UT254	400V			
UT255	500V			
UT257	600V			
UT258	800V			
UT364	1000V			
UT249	100V	1V @ 500mA	2μA	75μA
UT242	200V			
UT244	400V			
UT245	500V			
UT247	600V			
UT362	800V			
UT363	1000V			
UT236	100V	1V @ 400mA	2μA	75μA
UT234	200V			
UT235	400V			
UT237	500V			
UT238	600V			
UT361	800V			
UT347	1000V			


Allowable Forward Surge vs Number of Cycles

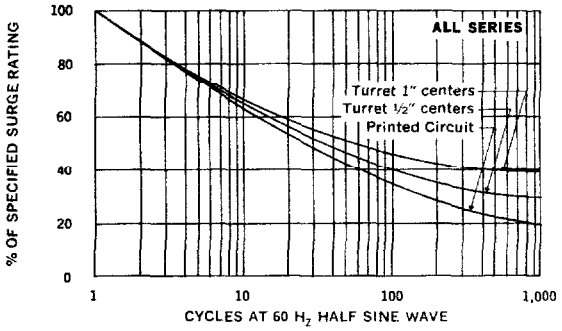


Efficiency vs Frequency at Rated Current (Sine Wave)

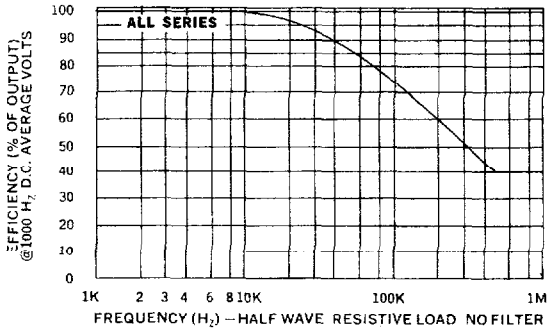

Forward Pulse Current vs Pulse Duration

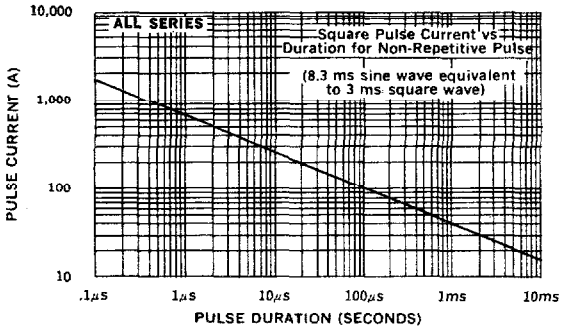

Reverse Pulse Power vs Pulse Duration

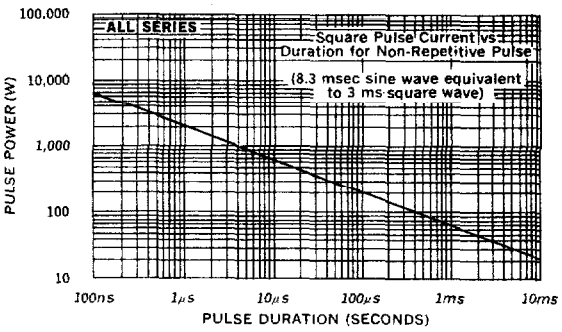


580 PLEASANT STREET • WATERTOWN, MA 02172
TEL. (617) 926-0404 • FAX (617) 924-1235


PRINTED IN U.S.A.

2


Maximum Current vs Lead Temperature

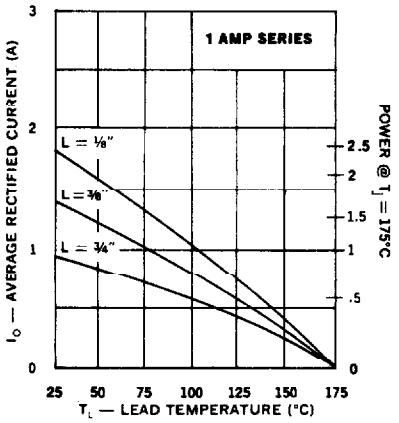


Maximum Current vs Lead Temperature

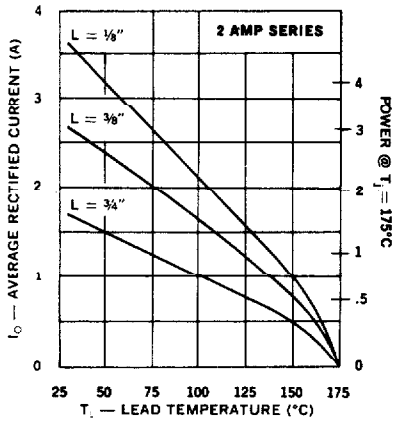


Typical Forward Current vs Forward Voltage

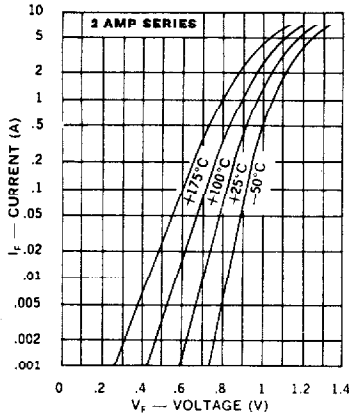

Typical Forward Current vs Forward Voltage

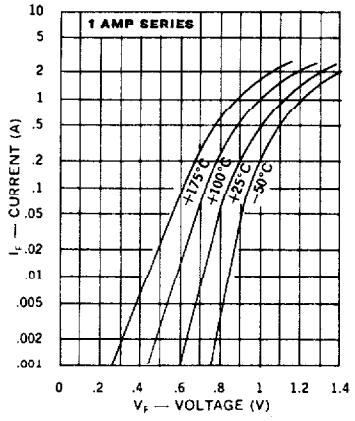

Typical Leakage Current vs. PIV

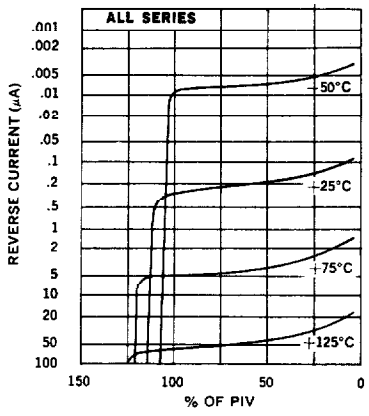

580 PLEASANT STREET • WATERTOWN, MA 02172
TEL. (617) 926-0404 • FAX (617) 924-1235

PRINTED IN U.S.A.