
MICRO SWITCH
FREEPORT ILLINOIS. U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V3L-2436
CQ-X1552

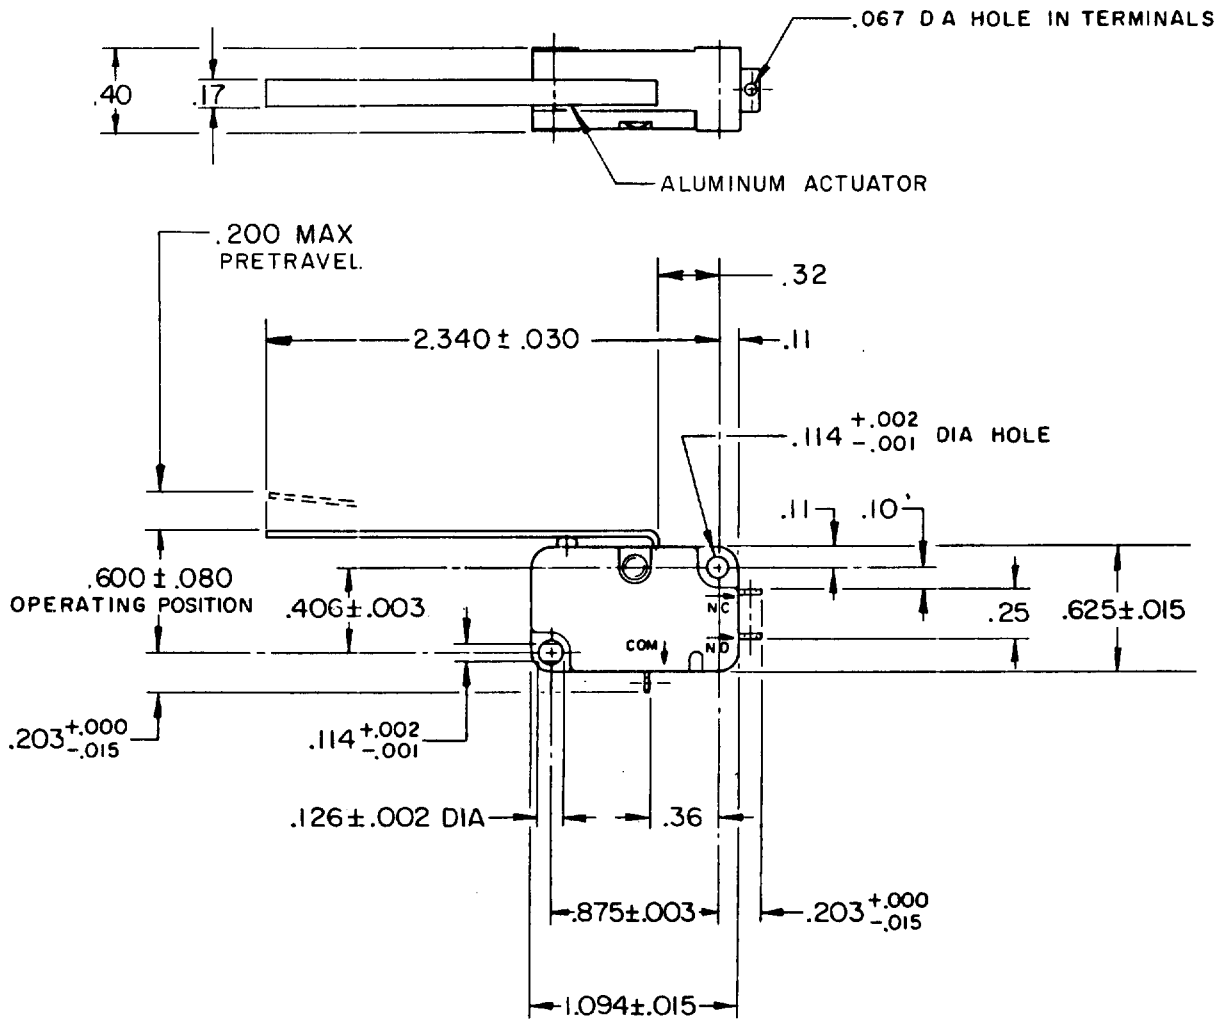

NOTE-
⚠1 - FORCE CHARACTERISTICS CHECKED WITH SWITCH LYING ON SIDE

REVISIONS		
A	PR-7605	C E B 20 JAN 79
B	CO 59921	SMA 29 SEPT 86
C	CO 76448	D C S 28 JAN 94

DRAWING NUMBER	ISSUE	REPLACES	RELEASE NO.	CHECK
M V3L-2436	4		PR-7605	

DRAWN C J H 17 JAN 79 CHECK C E B 20 JAN 79 CHECK

FO-52848-A

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE - - - 7 GRAMS MAX ⚠1
RELEASE TRAVEL - - - - - - .030 MIN
DIFFERENTIAL TRAVEL - - - - .055 MAX
OVERTRAVEL - - - - - - - - .160 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L162 5A-125, 250, 277VAC
1/10HP-250VAC

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X XX	0.38/.015
THREE PLACES			X XXX	0.13/.005
ANGLES				

DESIGN UNITS — SI METRIC ☐ — US CUSTOMARY ☒

WEIGHT