3.3V, HCMOS, Thru-Hole VCXO

Model: VCXO-DLF | **RoHS Compliant / Pb Free** | **Rev. 9/19/2006**

http://www.foxonline.com/need_a_sample.htm

Need a Sample

FEATURES

- 3.3V Operation
- HCMOS Output
- Low Power Consumption
- Rugged Resistance Weld

OPTIONS

- Many Stability/Pullability Options
- -40ºC ~ +85ºC Option ('RLF' Version)
- 1/2 Size Version Available

Learn more about:
Part Marking Identification
Internet required

• PART NUMBER SELECTION


Learn More - Internet Required

Part Number	Model Number	Frequency Stability[1]	Frequency Pullability	Operating Temperature	Frequency Range (MHz)
459-Frequency-xxxxx	VCXO-D3LF	±50PPM	±100PPM	-10 ~ +70 (ºC)	1.000 ~ 40.500
463-Frequency-xxxxx	VCXO-D3RLF	±50PPM	±100PPM	-40 ~ +85 (ºC)	1.000 ~ 40.500
460-Frequency-xxxxx	VCXO-D4LF	±25PPM	±100PPM	-10 ~ +70 (ºC)	1.000 ~ 40.500
671-Frequency-xxxxx	VCXO-D4RLF	±25PPM	±100PPM	-40 ~ +85 (ºC)	1.000 ~ 40.500
461-Frequency-xxxxx	VCXO-D7LF	±25PPM	±50PPM	-10 ~ +70 (ºC)	1.000 ~ 40.500
462-Frequency-xxxxx	VCXO-D8LF	±100PPM	±100PPM	-10 ~ +70 (ºC)	1.000 ~ 40.500
464-Frequency-xxxxx	VCXO-D8RLF	±100PPM	±100PPM	-40 ~ +85 (ºC)	1.000 ~ 40.500

• ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (FO)	1.000 ~ 40.500[2] MHz
Storage Temperature Range (TSTG)	-55ºC ~ +125ºC
Supply Voltage (VDD)	3.3V ± 5%
Control Voltage (VC)	1.65V ± 1.65V
Input Current (IDD)	
1.000 ~ 24.000 MHz	10mA
24.000+ ~ 35.000 MHz	15mA
35.000+ ~ 40.500 MHz	25mA
Output Symmetry (50% VDD)	40% ~ 60%
Rise Time (10% ~ 90% VDD) (TR)	10nS
Fall Time (90% ~ 10% VDD) (TF)	10nS
Output Voltage (VOL)	10% VDD
(VOH)	90% VDD Min
Output Current (IOL)	4.0mA Min
(IOH)	-1.0mA Min
Output Load (HCMOS)	15pF
Start-up Time (Ts)	10mS
Frequency Linearity	±10%

[1] Inclusive of 25ºC tolerance, operating temperature range, input voltage change, load change, aging, shock, vibration, and Vc = 1.65V.
[2] Higher frequencies available on an individual inquiry basis.
All specifications subject to change without notice.

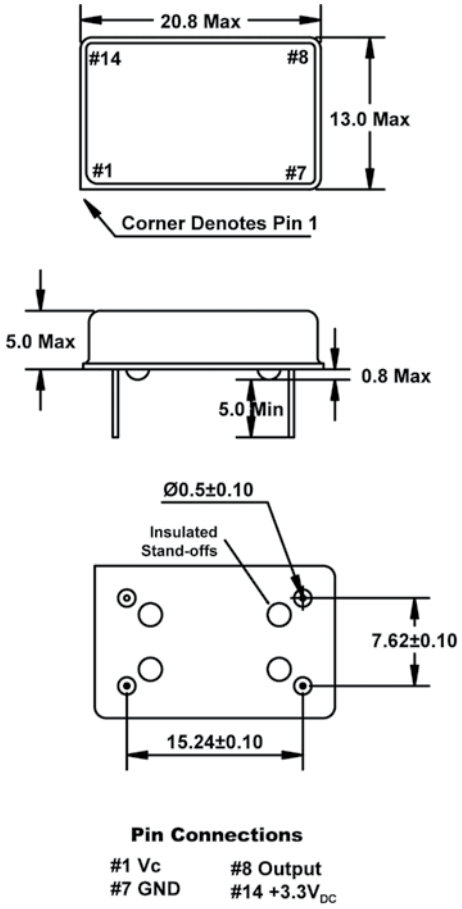

All dimensions are in millimeters.

FOXElectronics 5570 Enterprise Parkway Fort Myers, Florida 33905 USA +1.239.693.0099 FAX +1.239.693.1554 http://www.foxonline.com
EMEA Tel/Fax: +44 .1767.312632 | **Asia** Hong Kong Tel: +852.2854.4285 Fax +852.2854.4282 | **Taiwan** Tel: +888.2.22073427 Fax +886.2.22073486 | **Japan** Tel: +81.3.3374/2079 Fax: +81.3.3374.5221

© 2006 FOX ELECTRONICS | ISO9001:2000 Certified