VDSL FILTER
P/N: VD-7027 DATA SHEET

Feature



- Design to meet,UL94v-0.
- Operating Temperature: -10℃ to+60℃.
- Storage temperature: -25℃to +75℃.

Electrical Specifications @ 25°C					
Description	Passband Frequency	Insertion loss (dB Max)	Stopband Frequency	Attn. (dB min)	Impedance
LPF	900KHz ~ 3MHz	-1.2	4.5MHz ~ 7.9MHz	-15	40 Ω

Mechanical

PIN	ALOCALTION
1	LINE
2	LINE
9	TX +
10	TX −
3,4,5,6,7,8	NC
11,12,13,14,15,16	NC

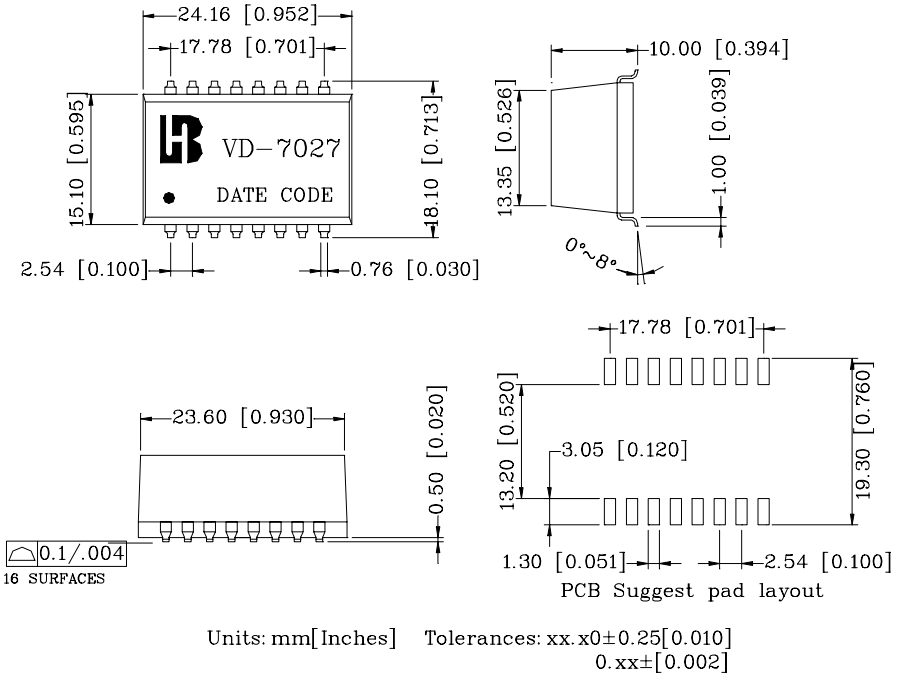

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±[0.002]

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434