


DESCRIPTION: MALE - DIP SOLDER - MACHINED - ECONOMY

No. OF PINS	DIMENSIONS							
	A	B	C	D	E	F	G	H
9	1.213	0.984	0.666	0.329	0.236	0.756	0.496	0.427
	30.80	24.99	16.92	8.36	5.99	19.20	12.60	10.85
15	1.541	1.312	0.994	0.329	0.236	1.091	0.496	0.427
	39.15	33.32	25.25	8.36	5.99	27.70	12.60	10.85
25	2.087	1.852	1.534	0.329	0.236	1.618	0.496	0.427
	53.00	47.04	38.96	8.36	5.99	41.10	12.60	10.85

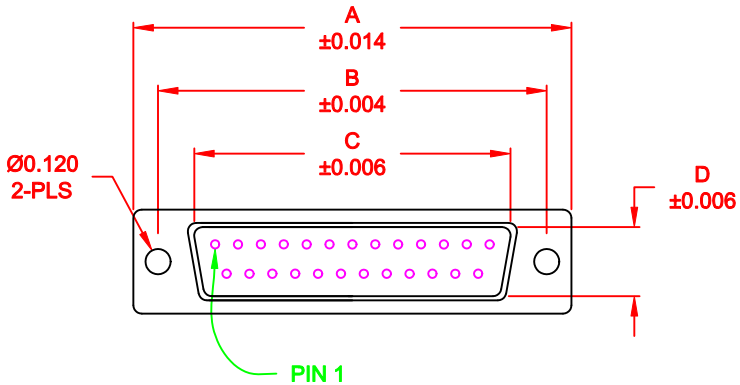

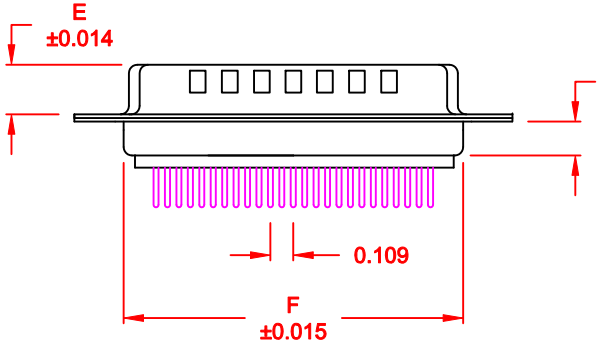

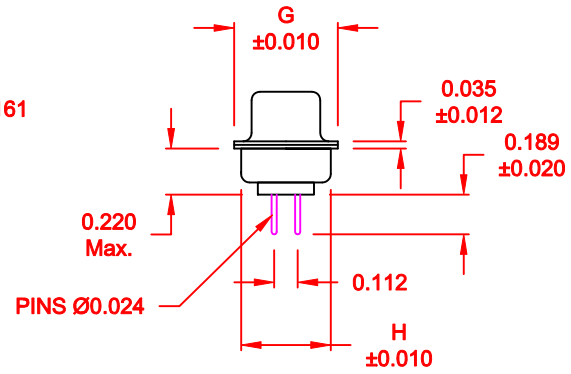

772-EYY-1 1 3 R YY 1

SERIES
POSITIONS
- E09
- E15
- E25

GENDER
- 1 = MALE

TERMINATION
- 1 = DIP SOLDER

SHELL PLATING
- 3 = NICKEL (GROUND INDENTS)

RoHS COMPLIANT

HARDWARE OPTIONS
- 00 = NO HARDWARE
- 01 = 0.098" 4-40 INSERT, BOARD SIDE
- 05 = 0.224" 4-40 BOARD LOCK, BOARD SIDE

PLATING OPTIONS
- 1 = GOLD FLASH

MATERIAL:

SHELL:	STEEL, NICKEL PLATED
INSULATOR:	UL 94V-O RATED, WHITE PA6T
PROCESS TEMP.:	260° C
CONTACT:	BRASS
SEALING MATERIAL:	F08 FLEXIBLE ADHESIVE

ELECTRICAL:

CURRENT RATING:	5 AMPS
CONTACT RESISTANCE:	15 mOhms Max.
INSULATION RESISTANCE:	1,000 MOhms min.
VOLTAGE:	500VAC FOR 1 MINUTE
TEMPERATURE:	-50° C TO 100° C

MEETS IP67 STANDARDS
(SEE PAGE 3 FOR SEALING DETAILS)

RoHS COMPLIANT


DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.


DRAWN:	PAM JENKINS
DATE:	9-18-08
CHECKED:	
DATE:	
SCALE:	1 : 1
SHEET	1 OF 3
REV	2
DWG NO.	772-EYY-113RYY1

NorComp


DESCRIPTION: **PCB LAYOUT - STANDARD "D"**

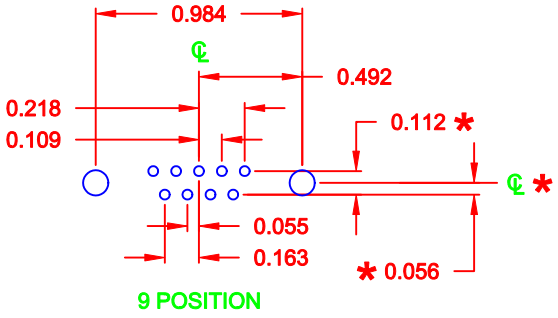

9 POSITION

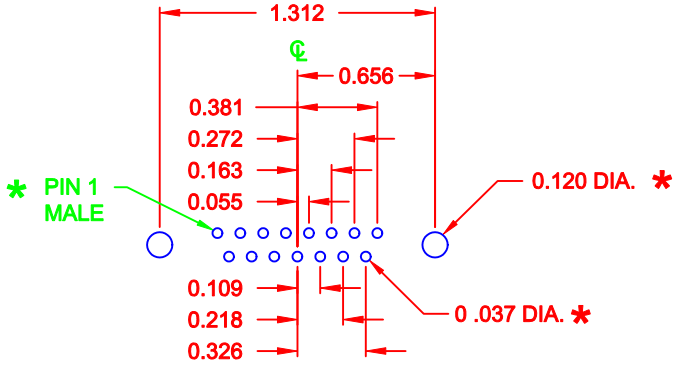

15 POSITION

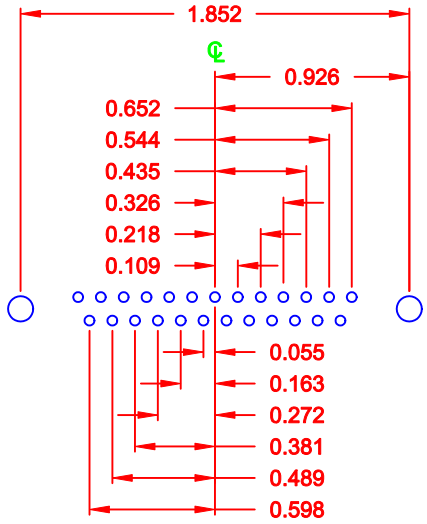

25 POSITION

* TYP. ON ALL SIZES


DO NOT SCALE FROM DRAWING


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS	DATE: 9-18-08
CHECKED:	DATE:
SCALE: FULL	SHEET 2 OF 3
REV 2	
DWG NO. 772-EYY-113RYY1	

NorComp

DESCRIPTION: IP67 - MALE - SOLDER CUP - MACHINED - ECONOMY - SEALING PROCESS

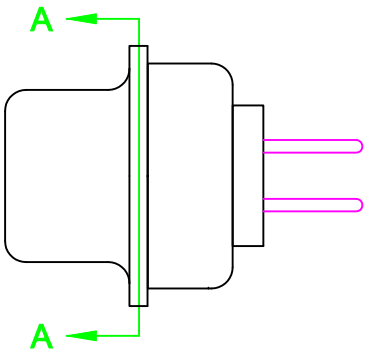

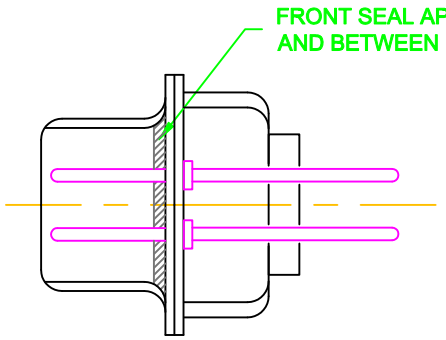


DETAIL A-A


HARDWARE OPTIONS

ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS

01X ..... 0.098" (BOARD SIDE) - CN1

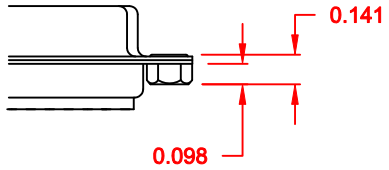

05X ..... 0.224" BOARD SIDE - CN10

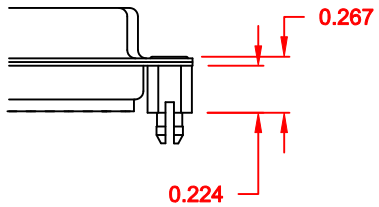

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN: C. SMITH	DATE: 06-10-09
CHECKED:	DATE:
SCALE: 2.5 : 1	SHEET 3 OF 3
REV 2	
DWG NO. 772-EYY-113RYY1	