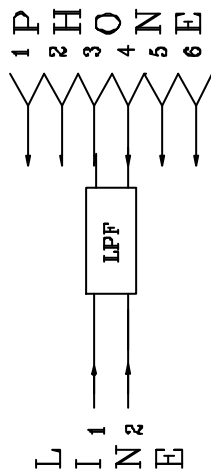
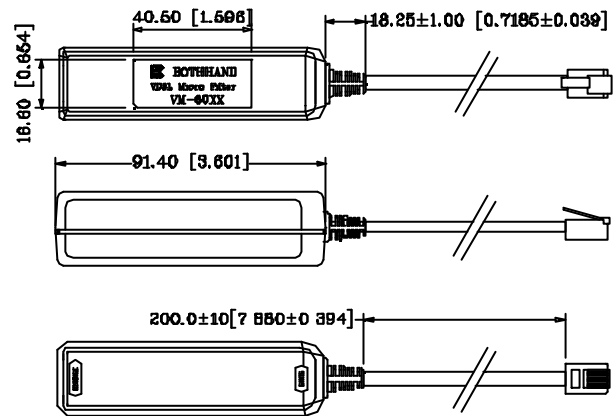



**Feature**

- For use with VDSL Chipset.
- Operating Temp : -10°C to +60°C
- Storage Temp : -25°C to +75°C

Electrical Specifications @ 25°C

Part Number	Description	Passband Frequency	Insertion Loss (dB Max)	Return Loss (dB Min)	Stopband Frequency	Attenuation (dB Min)	Impedance (Ω)
VM-6063	LPF	DC to 125KHz	20KHz 125KHz -1	125KHz -15	800KHz 7.9MHz	-65	150Ω
VM-6064		DC to 630KHz	20K 630KHz -1.5	630KHz -12	900KHz 7.9MHz	-30	

Schematics**Mechanical**

Units: mm[Inches]
Tolerances: xxx.x±1.0[0.039]
xx.x0±0.25[0.010]