
IXYS


Dual Power HiPerFET™ Module

VMM 85-02F

V_{DSS} = 200 V
I_{D25} = 84 A
$R_{DS(on)}$ = 25 mΩ

Phaseleg Configuration
High dv/dt, Low t_{rr}, HDMOS™ Family





2 = Source 1
8 = Gate 2
10 = Kelvin Source 1
1 = Drain 1, Source 2
3 = Drain 2
9 = Kelvin Source 2
11 = Gate 1

Symbol	Conditions		Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C		200	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 10 kΩ		200	V
V_{GS}	Continuous		±20	V
V_{GSM}	Transient		±30	V
I_{D25}	T_C = 25°C		84	A
I_{D80}	T_C = 80°C		63	A
I_{DM}	T_C = 25°C, t_p = 10 µs, pulse width limited by T_{JM}		335	A
P_{tot}	T_C = 25°C		370	W
T_J			-40 ... +150	°C
T_{JM}			150	°C
T_{stg}			-40 ... +125	°C
V_{ISOL}	50/60 Hz	t = 1 min	3000	V~
	I_{ISOL} ≤ 1 mA	t = 1 s	3600	V~
M_d	Mounting torque (M5 or 10-32 UNF)		2.25-2.75/20-25	Nm/lb.in.
	Terminal connection torque (M5)		2.5-4/22-35	Nm/lb.in.
Weight	Typical including screws		130	g

Symbol	Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
V_{DSS}	V_{GS} = 0 V	200			V
$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 8 mA	2		4	V
I_{GSS}	V_{GS} = ±20 V DC, V_{DS} = 0			500	nA
I_{DSS}	V_{DS} = V_{DSS}, V_{GS} = 0 V, T_J = 25°C			400	µA
	V_{DS} = 0.8 • V_{DSS}, V_{GS} = 0 V, T_J = 125°C			2	mA
$R_{DS(on)}$	V_{GS} = 10 V, I_D = 0.5 • I_{D25} Pulse test, t ≤ 300 µs, duty cycle d ≤ 2%		20	25	mΩ

Features

- Two MOSFET's in phaseleg config.
- International standard package
- Direct copper bonded Al_2O_3 ceramic base plate
- Isolation voltage 3600 V~
- Low $R_{DS(on)}$ HDMOS™ process
- Low package inductance for high speed switching
- Kelvin source contact

Applications

- Switched-mode and resonant-mode power supplies
- Uninterruptible power supplies (UPS)

Advantages

- Easy to mount with two screws
- Space and weight savings
- High power density
- Low losses

Data per MOSFET unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions


943

© 2000 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

Symbol	Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
g_{fs}	V_{DS} = 10 V; I_D = 0.5 • I_{D25} pulsed	40	60		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		9600	15000	pF
C_{oss}			1800	4500	pF
C_{rss}			620	1500	pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}; R_G = 1 Ω (External), resistive load		70		ns
t_r			80		ns
$t_{d(off)}$			200		ns
t_f			100		ns
Q_g	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		380	450	nC
Q_{gs}			70	110	nC
Q_{gd}			190	230	nC
R_{thJC}				0.33	K/W
R_{thCH}	heatsink compound applied		0.2		K/W
d_S	Creepage distance on surface	12.7			mm
d_A	Strike distance through air	9.6			mm
a	Allowable acceleration			50	m/s^2

Dimensions in mm (1 mm = 0.0394")

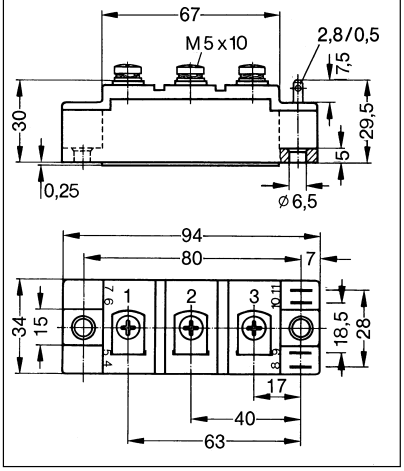

Source-Drain Diode

Symbol	Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			84	A
I_{SM}	Repetitive; pulse width limited by T_{JM}			335	A
V_{SD}	I_F = I_S; V_{GS} = 0 V, Pulse test, t ≤ 300 µs, duty cycle d ≤ 2%		0.9	1.2	V
t_{rr}	I_F = I_S, -di/dt = 100 A/µs, V_{DS} = 100 V, V_{GS} = 0 V		200	400	ns

IXYS MOSFETs and IGBTs are covered by one of the following U.S.patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025

Downloaded from Elcodis.com electronic components distributor

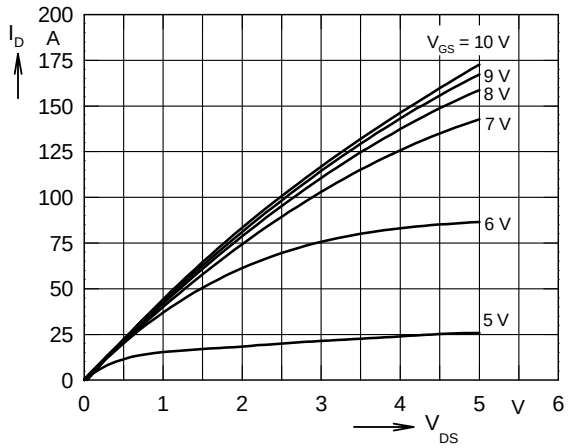


Fig. 1 Typical output characteristics $I_D = f(V_{DS})$

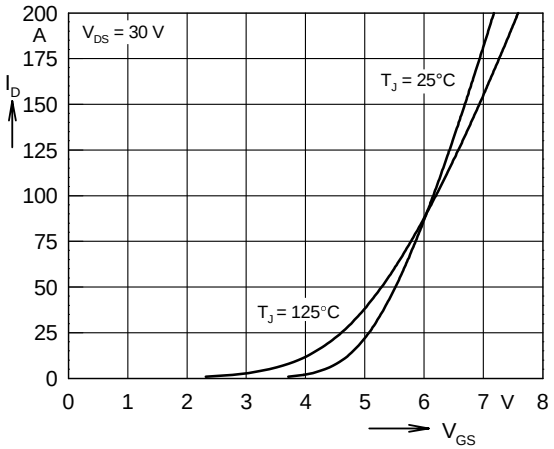


Fig. 2 Typical transfer characteristics $I_D = f(V_{GS})$

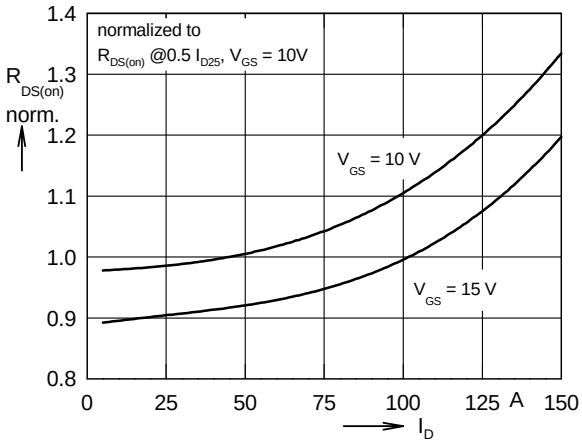


Fig. 3 Typical normalized $R_{DS(on)} = f(I_D)$

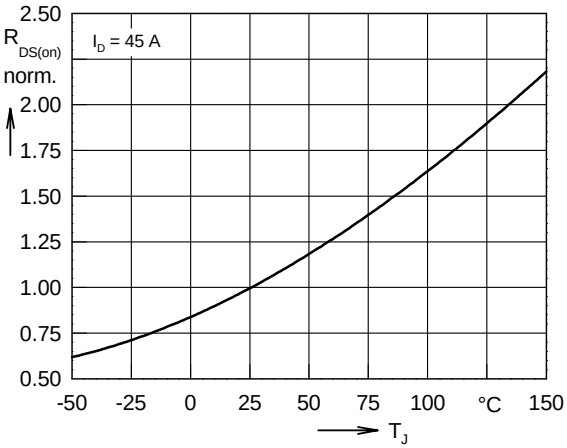


Fig. 4 Typical normalized $R_{DS(on)} = f(T_J)$

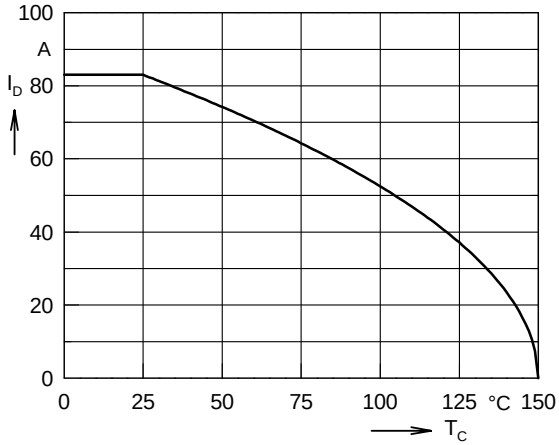


Fig. 5 Continuous drain current $I_D = f(T_C)$

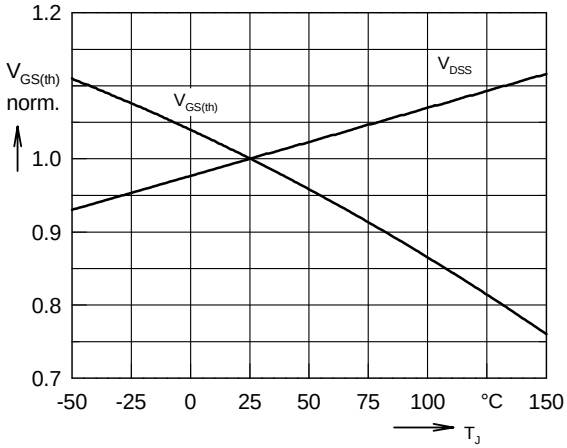


Fig. 6 Typical normalized $V_{DSS} = f(T_J)$, $V_{GS(th)} = f(T_J)$

© 2000 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor

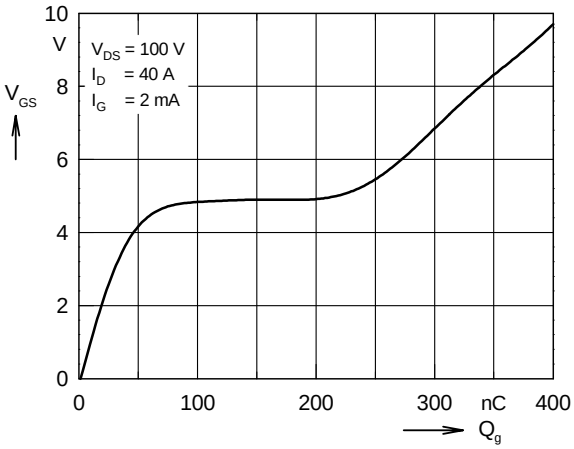


Fig. 7 Typical turn-on gate charge characteristics

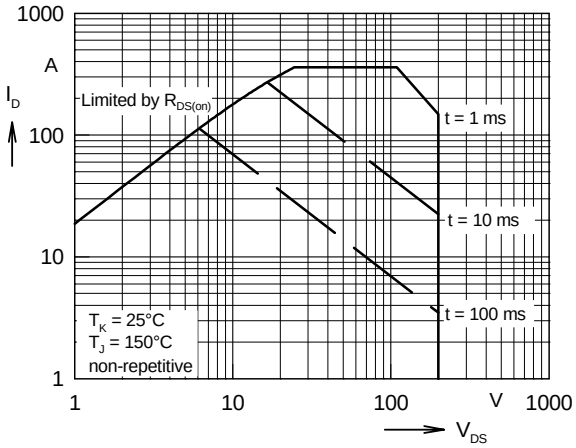


Fig. 8 Forward Safe Operating Area, $I_D = f(V_{DS})$

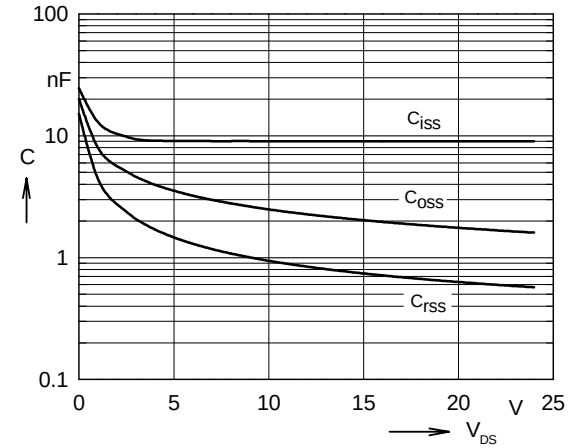


Fig. 9 Typical capacitances $C = f(V_{DS})$, f = 1 MHz

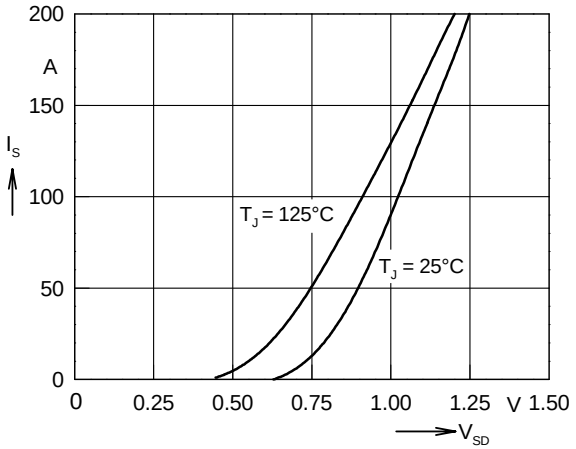


Fig. 10 Typical forward characteristics of reverse diode, $I_S = f(V_{SD})$

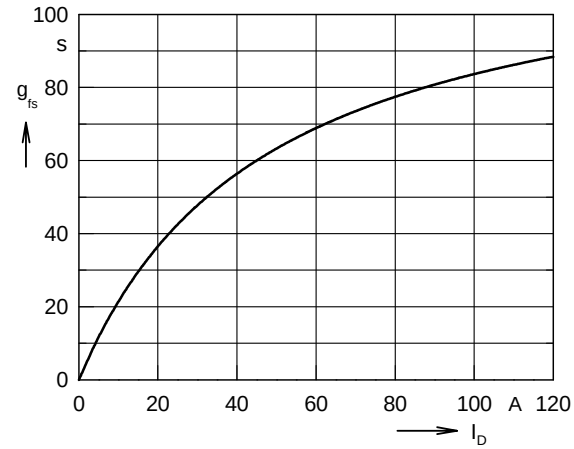


Fig. 11 Typical transconductance $g_{fs} = f(I_D)$

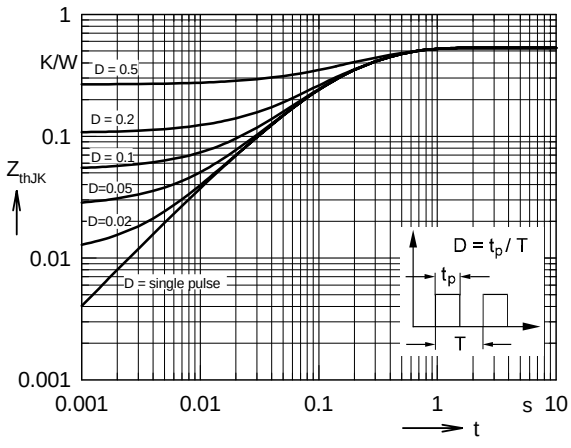


Fig. 12 Transient thermal resistance $Z_{thJK} = f(t_p)$

© 2000 IXYS All rights reserved

Downloaded from Elcodis.com electronic components distributor