VNH7013XP-E


Automotive integrated H-bridge

Features

Type	$R_{DS(on)}$	I_{out}	V_{ccmax}
VNH7013XP-E	13 mΩ typ (per leg)	40 A	72 V(1)

1. Per leg: sum of the two BV_{dss} (HSD + LSD); V_{CC} > 36 V whole bridge must be switched off;

- Maximum V_{CC} voltage: 72 V
- 10 V compatible inputs
- $R_{DS(on)}$ per leg: 13 mΩ typical
- Embedded thermal sensor: -8.1 mV/°K
- Very low stray inductance in power line



PowerSSO-36 TP

Description

The VNH7013XP-E is an automotive integrated H-bridge intended for a wide range of automotive applications driving DC motors. The device incorporates a dual channel and two single channel MOSFETs. All the devices are designed using STMicroelectronics® well known and proven proprietary VIPower® M0-S7 technology that allows to integrate in a package four different channels in H-bridge topology.

This package, specifically designed for the harsh automotive environment offers improved thermal performance thanks to exposed die pads. Moreover, its fully symmetrical mechanical design allows superior manufacturability at board level.

Table 1. Device summary

Package	Order codes	
	Tube	Tape and reel
PowerSSO-36 TP	VNH7013XP-E	VNH7013XPTR-E

Contents

1 Block diagram and pin description 5

2 Electrical specifications 7

2.1 Absolute maximum rating 7

2.2 Electrical characteristics 8

3 Package and PCB thermal data 15

3.1 PowerSSO-36 thermal data 15

3.1.1 Thermal calculation in clockwise and anti-clockwise operation in steady-state mode 16

3.1.2 Thermal resistances definition (values according to the PCB heatsink area) 17

3.1.3 Thermal calculation in transient mode 17

3.1.4 Single pulse thermal impedance definition (values according to the PCB heatsink area) 17

4 Package and packing information 20

4.1 ECOPACK® packages 20

4.2 PowerSSO-36 TP package information 20

4.3 PowerSSO-36 TP packing information 22

5 Revision history 23

List of tables

Table 1. Device summary . . . 1
Table 2. Pin definitions and functions . . . 6
Table 3. Absolute maximum rating . . . 7
Table 4. Power off . . . 8
Table 5. Power on . . . 8
Table 6. Dynamic . . . 8
Table 7. Gate resistance . . . 9
Table 8. Source drain diode . . . 9
Table 9. Switching on HSD . . . 9
Table 10. Switching on LSD . . . 9
Table 11. Switching off HSD . . . 9
Table 12. Switching off LSD . . . 10
Table 13. Thermal sensor . . . 10
Table 14. Thermal calculation in clockwise and anti-clockwise operation in steady-state mode . . . 16
Table 15. Thermal parameters . . . 19
Table 16. PowerSSO-36 TP mechanical data . . . 21
Table 17. Document revision history . . . 23

List of figures

Figure 1. Block diagram . . . 5
Figure 2. Configuration diagram . . . 5
Figure 3. Single pulse maximum current . . . 7
Figure 4. Gate charge vs gate-source voltage HS . . . 10
Figure 5. Gate charge vs gate-source voltage LS . . . 11
Figure 6. Capacitance variations HS . . . 11
Figure 7. Capacitance variations LS . . . 12
Figure 8. Thermal sensor voltage vs temperature . . . 12
Figure 9. Gate charge test circuit . . . 13
Figure 10. Test circuit for inductive load switching and diode recovery times . . . 13
Figure 11. Switching times test circuit for resistive load . . . 14
Figure 12. PowerSSO-36 PC board . . . 15
Figure 13. Chipset configuration . . . 16
Figure 14. Auto and mutual $R_{thj\text{-}amb}$ vs PCB copper area in open box free air condition . . . 16
Figure 15. PowerSSO-36 HSD thermal impedance junction ambient single pulse . . . 18
Figure 16. PowerSSO-36 LSD thermal impedance junction ambient single pulse . . . 18
Figure 17. Thermal fitting model of an H-bridge in PowerSSO-36 . . . 19
Figure 18. PowerSSO-36 TP package dimensions . . . 20
Figure 19. PowerSSO-36 TP tube shipment (no suffix) . . . 22
Figure 20. PowerSSO-36 TP tape and reel shipment (suffix “TR”) . . . 22

1 Block diagram and pin description

Figure 1. Block diagram

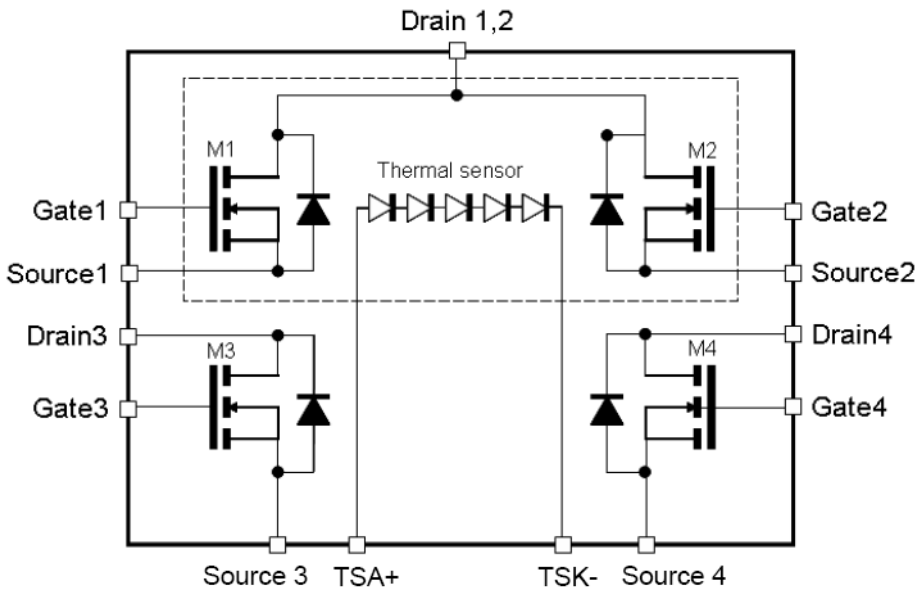


Figure 2. Configuration diagram

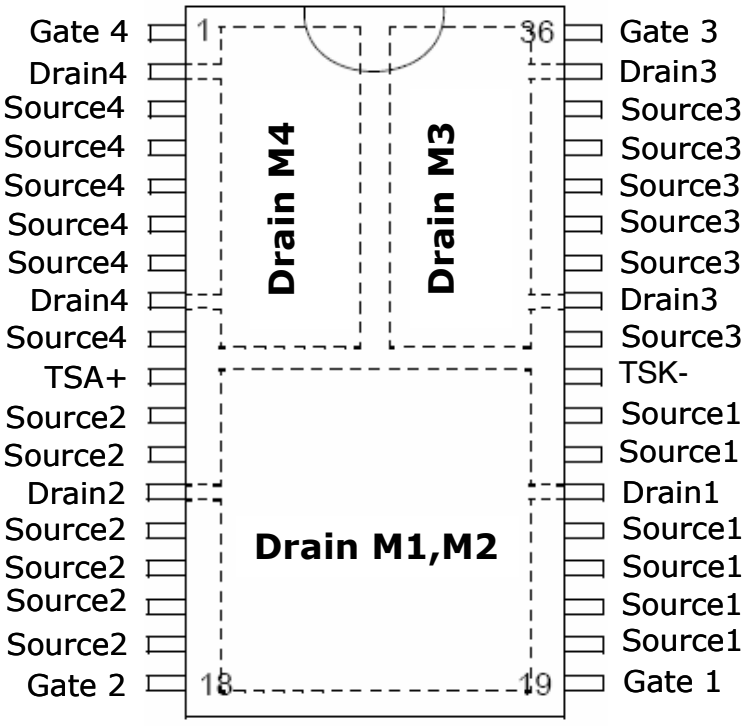


Table 2. Pin definitions and functions

Pin number	Symbol	Function
1	Gate 4	Gate of the LSD 4
2, 8	Drain 4	Drain of the LSD 4
3, 4, 5, 6, 7, 9	Source 4	Source of the LSD 4
10	TSA+	Thermal sensor anode
11, 12, 14, 15, 16, 17	Source 2	Source of the HSD 2
13	Drain 2	Drain of the HSD 2
18	Gate 2	Gate of the HSD 2
19	Gate 1	Gate of the HSD 1
20, 21, 22, 23, 25, 26	Source 1	Source of the HSD 1
24	Drain 1	Drain of the HSD 1
27	TSK-	Thermal sensor cathode
28, 30, 31, 32, 33, 34	Source 3	Source of the LSD 3
29, 35	Drain 3	Drain of the LSD 3
36	Gate 3	Gate of the LSD 3

2 Electrical specifications


2.1 Absolute maximum rating

Table 3. Absolute maximum rating

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage (whole bridge switched off)	72	V
I_{max}	Maximum output current (continuous)	40	A
V_{GS_max}	Maximum gate source voltage	18	V
I_{Pulse_max}	Maximum Single Pulse output current	80(1)	A
T_j	Junction operating temperature	175	°C
T_c	Case operating temperature	-40 to 150	°C
T_{STG}	Storage temperature	-55 to 150	°C
I_S	Diode continuous forward current	40	A

1. Pulse duration = 20 ms (see *Figure 3*).

Figure 3. Single pulse maximum current

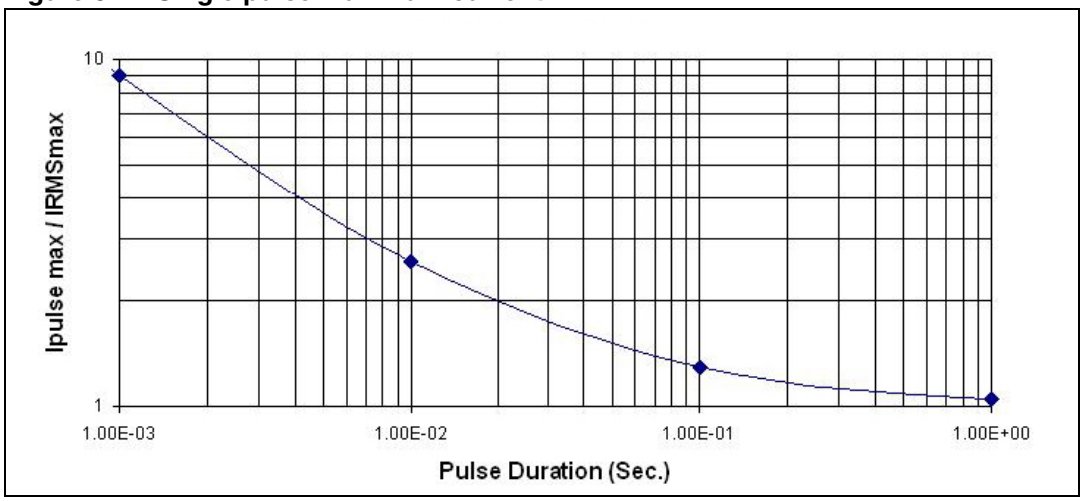

2.2 Electrical characteristics

T_j = 25 °C, unless otherwise specified.

Table 4. Power off

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	I_D = 10 mA, V_{GS} = 0 V	36	—		V
I_{DSS}	Zero gate voltage drain current (V_{GS}=0V)	V_{DS} = 28 V; -40 °C < T_j < 150 °C		—	100	µA
		V_{DS} = 28 V; T_j = 25 °C		—	10	µA
I_{GSS}	Gate-source leakage current (V_{DS}=0V)	V_{GS} = ±10 V		—	±100	nA

Table 5. Power on

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{GS(th)}$	Gate threshold voltage	V_{DS} = V_{GS}; I_D = 1 mA	2		4	V
$dV_{GS(th)}/dT$	Gate threshold voltage temperature derating	V_{DS} = V_{GS}; I_D = 1 mA		7.5		mV/°C
$R_{DS(on)}$ HS	Static drain-source on resistance	V_{GS} = 10 V; I_D = 5 A; T_j = 25 °C		5.7		mΩ
		V_{GS} = 10 V; I_D = 5 A; T_j = 150 °C			11.9	mΩ
$R_{DS(on)}$ LS	Static drain-source on resistance	V_{GS} = 10 V; I_D = 5 A; T_j = 25 °C		7.3		mΩ
		V_{GS} = 10 V; I_D = 5 A; T_j = 150 °C			15.1	mΩ

Table 6. Dynamic

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
G_{fs_HS} (1)	Forward transconductance	V_{DS} = 15 V; I_D = 20 A; T_j = 25 °C	—	20	—	S
G_{fs_LS} (1)	Forward transconductance		—	17.5	—	S
C_{iss_HS}	Input capacitance	V_{DS} = 25 V; f = 1 MHz; V_{GS} = 0 V (see *Figure 6*)	—	1836	—	pF
C_{oss_HS}	Output capacitance		—	426	—	pF
C_{rss_HS}	Reverse transfer capacitance		—	55	—	pF
C_{iss_LS}	Input capacitance	V_{DS} = 25 V; f = 1 MHz; V_{GS} = 0 V (see *Figure 7*)	—	1250	—	pF
C_{oss_LS}	Output capacitance		—	311	—	pF
C_{rss_LS}	Reverse transfer capacitance		—	49	—	pF

1. Pulsed: pulse duration = 300µs, duty cycle 1.5%.

Table 7. Gate resistance

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
R_{G_HS}	Gate resistance HS	V_{DD} = 15 V; f_{gate} = 1 MHz	—	20	—	Ω
R_{G_LS}	Gate resistance LS		—	13	—	Ω

Table 8. Source drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{SD}(1)	Forward on voltage	I_{SD} = 20 A; V_{GS} = 0 V; T_j = 25 °C	—	0.9	1.1	V
t_{rr}	Reverse recovery time	I_{SD} = 20 A; di/dt = 100 A/µs; V_{DD} = 20 V; T_j = 150 °C (see *Figure 10*)	—	50		ns
Q_{rr}	Reverse recovery charge		—	28		nC
I_{RRM}	Reverse recovery current		—	0.8		A

1. Pulse width limited by safe operating area.

Table 9. Switching on HSD

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn on delay time	V_{DD} = 15 V; I_D = 20 A; R_G = 4.7 Ω; V_{GS} = 10 V	—	53	—	ns
t_r	Rise time		—	319	—	ns
Q_g	Total gate charge	V_{DD} = 15 V; I_D = 20 A; V_{GS} = 10 V (see *Figure 4* and *Figure 9*)	—	36	—	nC
Q_{gs}	Gate-source charge		—	8.5	—	nC
Q_{gd}	Gate-drain charge		—	5	—	nC

Table 10. Switching on LSD

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn on delay time	V_{DD} = 15 V; I_D = 20 A; R_G = 4.7 Ω; V_{GS} = 10 V	—	53	—	ns
t_r	Rise time		—	430	—	ns
Q_g	Total gate charge	V_{DD} = 15 V; I_D = 20 A; V_{GS} = 10 V (see *Figure 5* and *Figure 9*)	—	23	—	nC
Q_{gs}	Gate-source charge		—	6	—	nC
Q_{gd}	Gate-drain charge		—	2.5	—	nC

Table 11. Switching off HSD

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(off)}$	Turn-off delay time	V_{DD} = 15 V; I_D = 20 A; R_G = 4.7 Ω; V_{GS} = 10 V (see *Figure 11*)	—	253	—	ns
t_f	Fall time		—	169	—	ns

Table 12. Switching off LSD

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(off)}$	Turn-off delay time	V_{DD} = 15 V; I_D = 20 A; R_G = 4.7 Ω; V_{GS} = 10 V (see *Figure 11*)	—	124	—	ns
t_f	Fall time		—	293	—	ns

Table 13. Thermal sensor(1)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_F	Chain diode forward voltage	T_j = 25 °C; I_F = 250 µA (see *Figure 8*)	3.72	3.88	4.04	V
S_F	Chain temperature coefficient	-40 °C < T_j < 175 °C; I_F = 250 µA		-8.1		mV/°K

1. See *Figure 8*.

Figure 4. Gate charge vs gate-source voltage HS

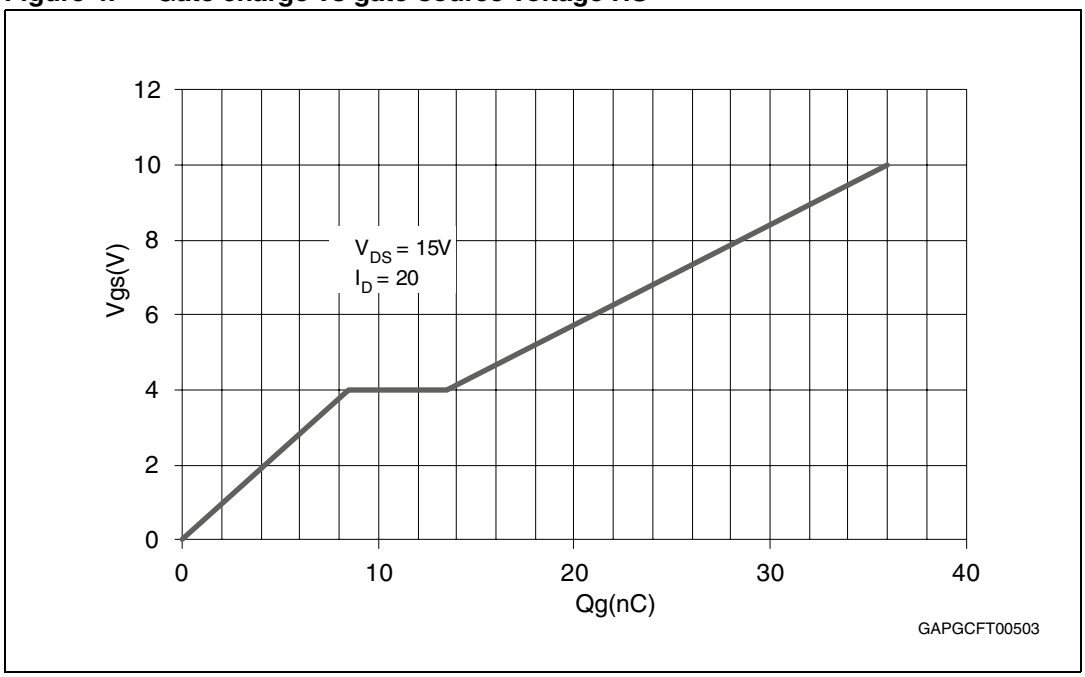


Figure 5. Gate charge vs gate-source voltage LS

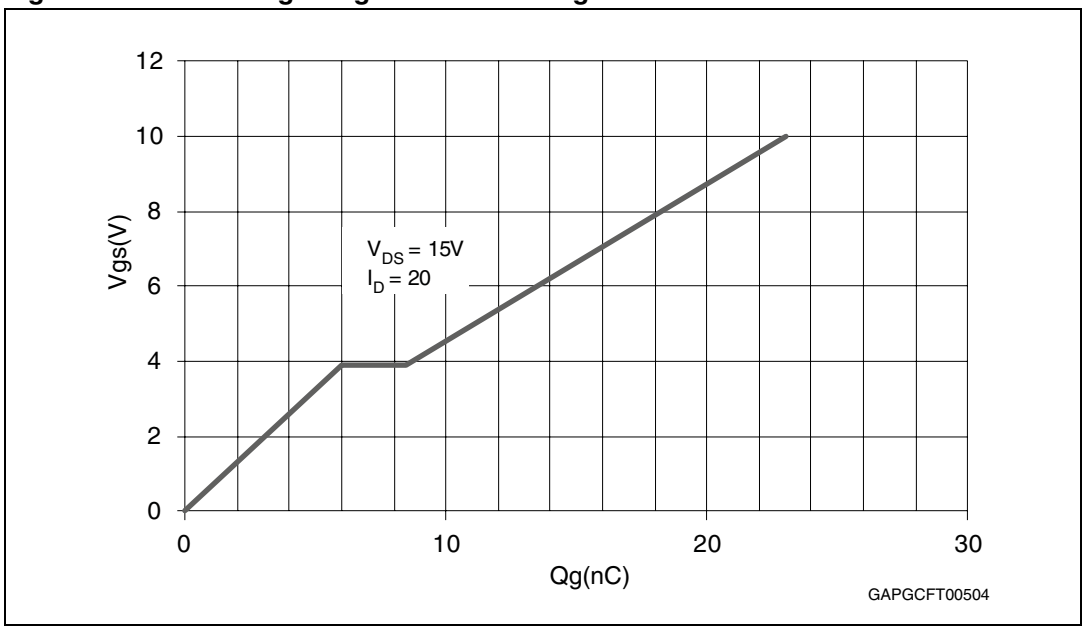


Figure 6. Capacitance variations HS

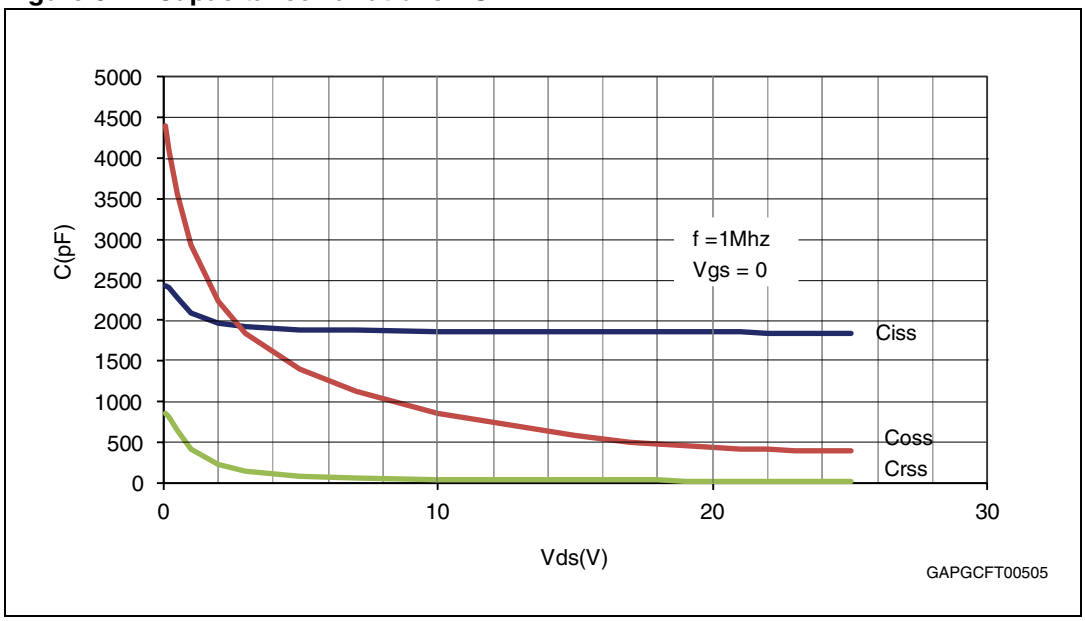


Figure 7. Capacitance variations LS

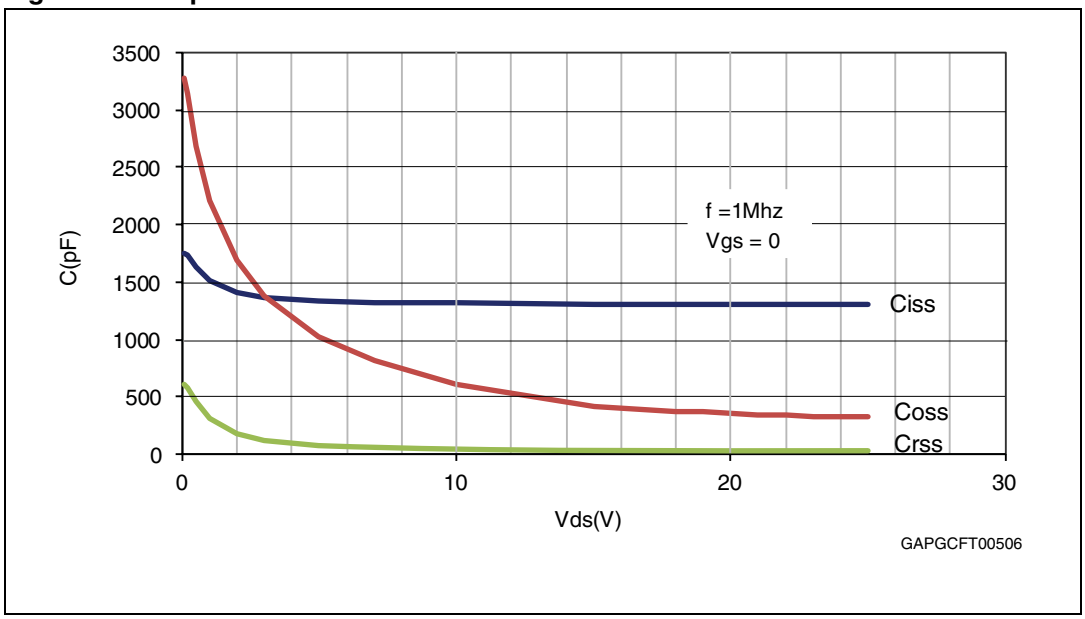


Figure 8. Thermal sensor voltage vs temperature

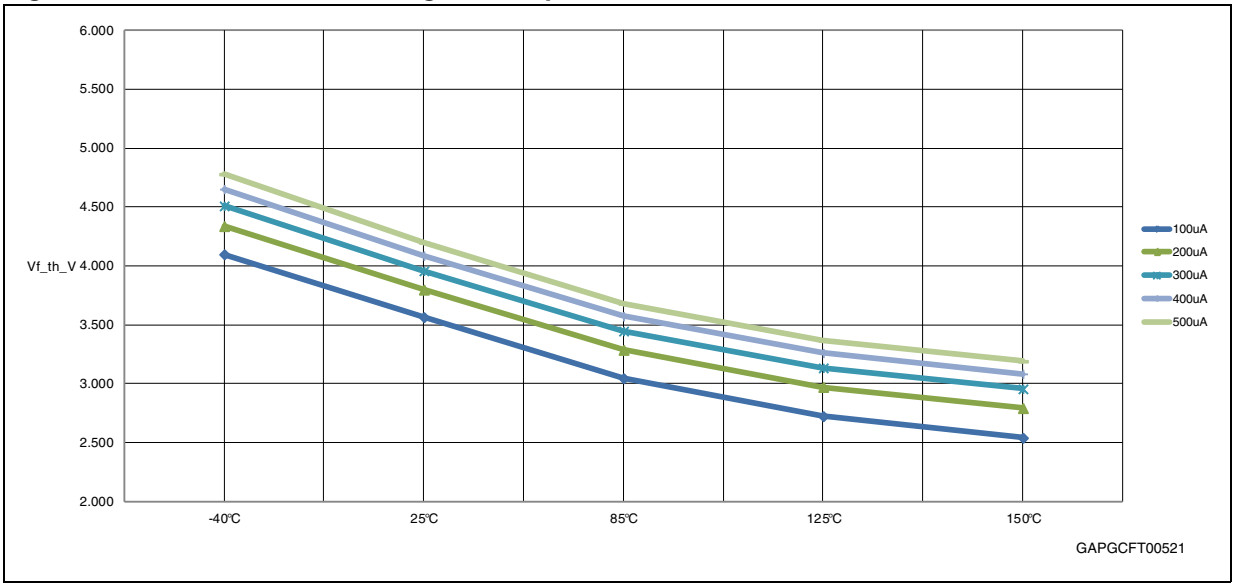


Figure 9. Gate charge test circuit

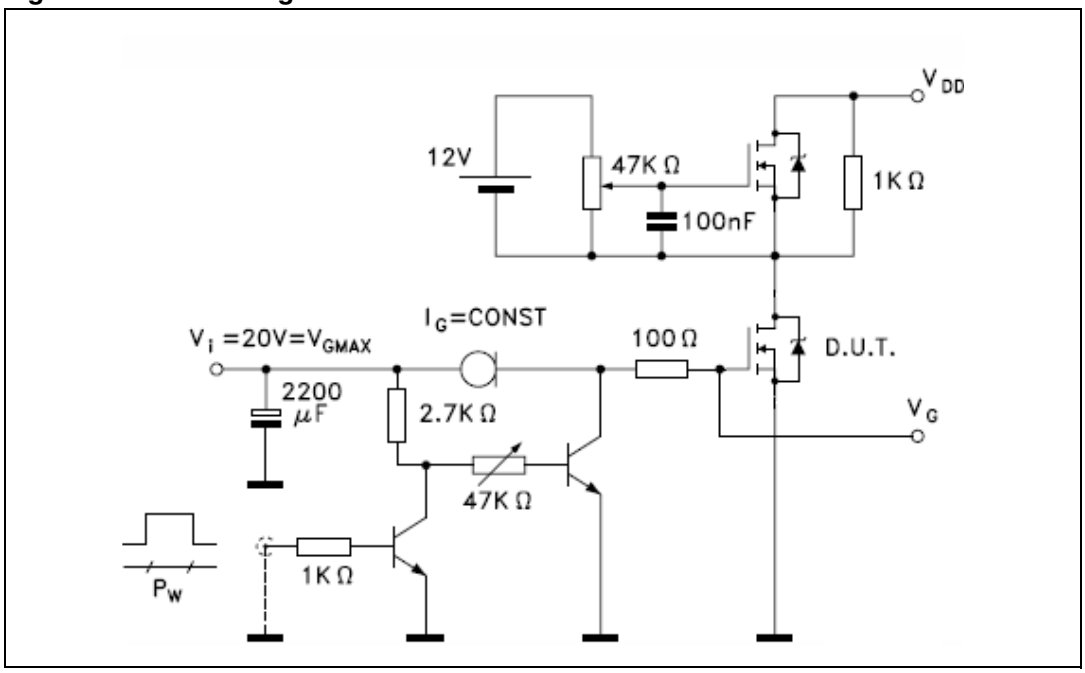


Figure 10. Test circuit for inductive load switching and diode recovery times


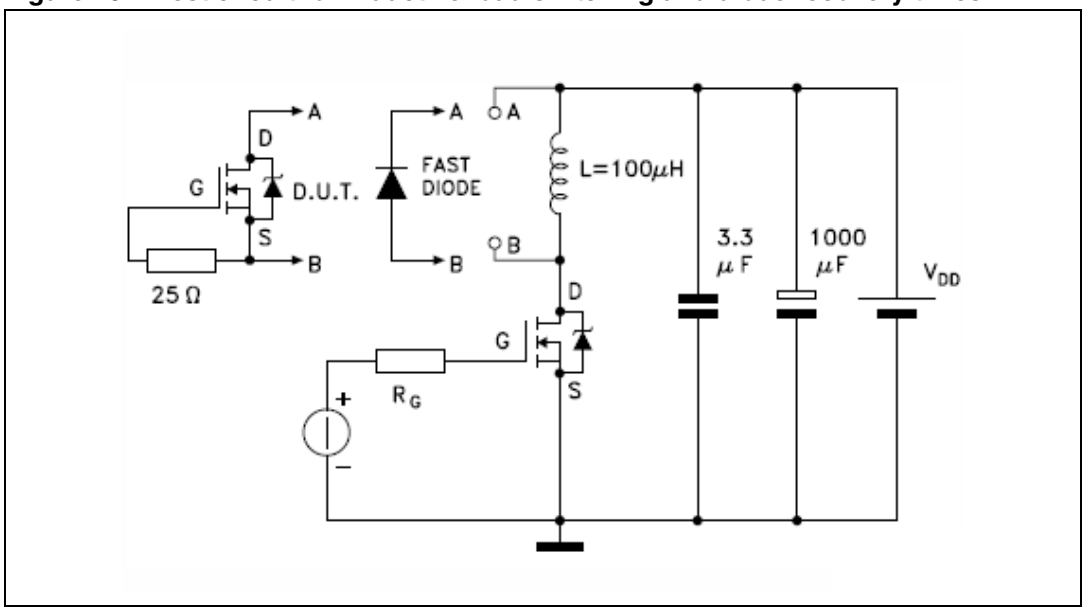



Figure 11. Switching times test circuit for resistive load

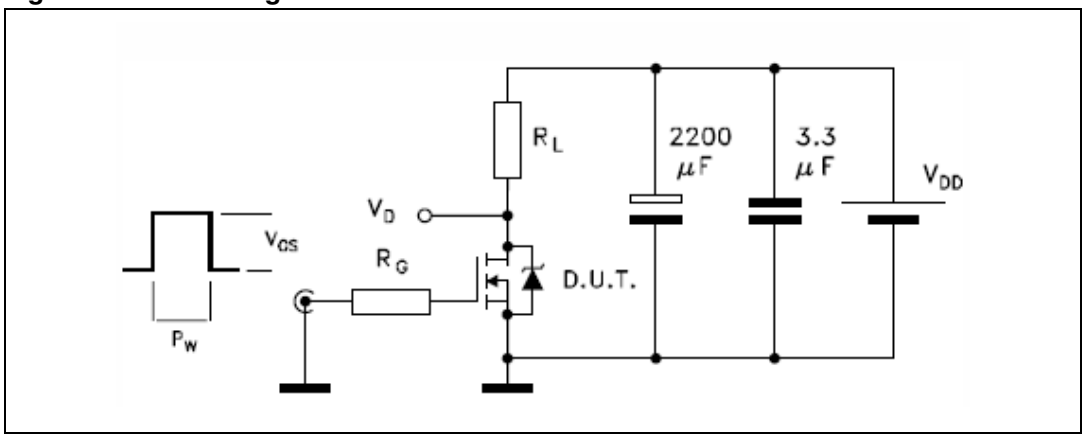


3 Package and PCB thermal data

3.1 PowerSSO-36 thermal data


Figure 12. PowerSSO-36 PC board

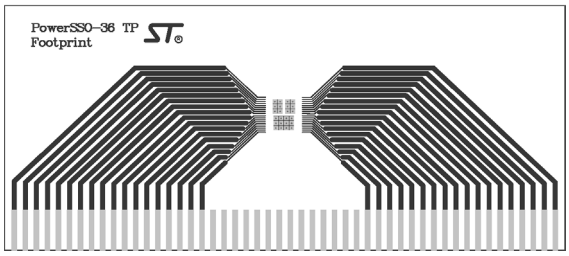


Double layers: footprint

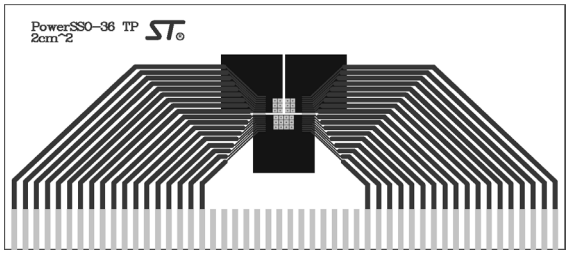

Double layers: 2cm^2 of Cu

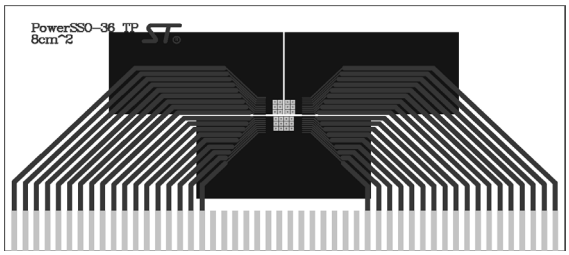

Double layers: 8cm^2 of Cu

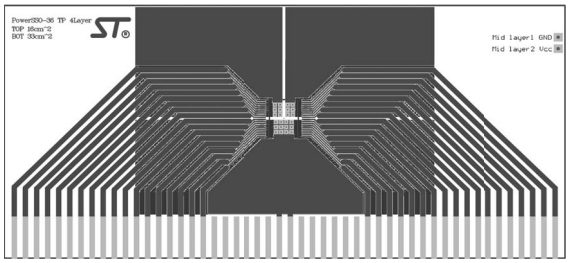

Four layers: Cu on top layer: 16 cm^2; Cu on bottom layer: 32 cm^2; Cu on middle layer: total coverage

Figure 13. Chipset configuration


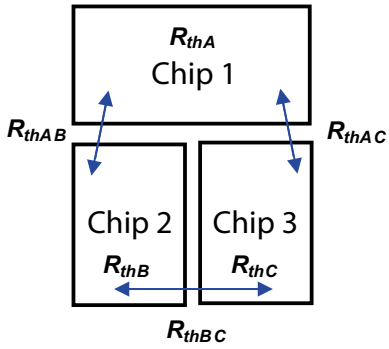


Figure 14. Auto and mutual $R_{thj\text{-}amb}$ vs PCB copper area in open box free air condition

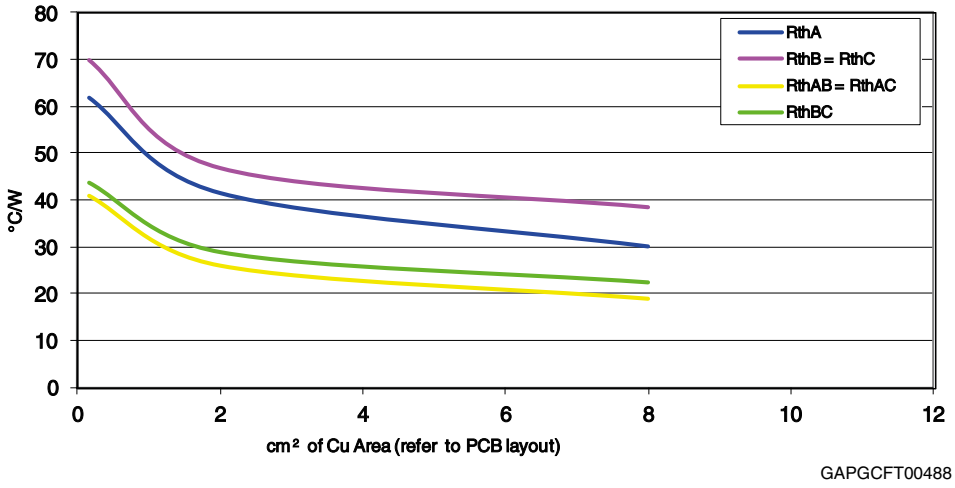

Note: Referred to double layer PCB

3.1.1 Thermal calculation in clockwise and anti-clockwise operation in steady-state mode

Table 14. Thermal calculation in clockwise and anti-clockwise operation in steady-state mode

HS_A	HS_B	LS_A	LS_B	T_{jHSAB}	T_{jLSA}	T_{jLSB}
ON	OFF	OFF	ON	$P_{dHSA} \times R_{thHS} + P_{dLSB} \times R_{thHSLS} + T_{amb}$	$P_{dHSA} \times R_{thHSLS} + P_{dLSB} \times R_{thLSLS} + T_{amb}$	$P_{dHSA} \times R_{thHSLS} + P_{dLSB} \times R_{thLS} + T_{amb}$
OFF	ON	ON	OFF	$P_{dHSB} \times R_{thHS} + P_{dLSA} \times R_{thHSLS} + T_{amb}$	$P_{dHSB} \times R_{thHSLS} + P_{dLSA} \times R_{thLS} + T_{amb}$	$P_{dHSB} \times R_{thHSLS} + P_{dLSA} \times R_{thLSLS} + T_{amb}$

3.1.2 Thermal resistances definition (values according to the PCB heatsink area)

R_{thHS} = R_{thHSA} = R_{thHSB} = High Side Chip Thermal Resistance Junction to Ambient (HS_A or HS_B in ON state)

R_{thLS} = R_{thLSA} = R_{thLSB} = Low Side Chip Thermal Resistance Junction to Ambient

R_{thHSLS} = $R_{thHSALSB}$ = $R_{thHSBLSA}$ = Mutual Thermal Resistance Junction to Ambient between High Side and Low Side Chips

R_{thLSLS} = $R_{thLSALSB}$ = Mutual Thermal Resistance Junction to Ambient between Low Side Chips

3.1.3 Thermal calculation in transient mode[a]

T_{jHSAB} = Z_{thHS} x P_{dHSAB} + Z_{thHSLS} x (P_{dLSA} + P_{dLSB}) + T_{amb}

T_{jLSA} = Z_{thHSLS} x P_{dHSAB} + Z_{thLS} x P_{dLSA} + Z_{thLSLS} x P_{dLSB} + T_{amb}

T_{jLSB} = Z_{thHSLS} x P_{dHSAB} + Z_{thLSLS} x P_{dLSA} + Z_{thLS} x P_{dLSB} + T_{amb}

3.1.4 Single pulse thermal impedance definition (values according to the PCB heatsink area)

Z_{thHS} = High Side Chip Thermal Impedance Junction to Ambient

Z_{thLS} = Z_{thLSA} = Z_{thLSB} = Low Side Chip Thermal Impedance Junction to Ambient

Z_{thHSLS} = $Z_{thHSABLSA}$ = $Z_{thHSABLSB}$ = Mutual Thermal Impedance Junction to Ambient between High Side and Low Side Chips

Z_{thLSLS} = $Z_{thLSALSB}$ = Mutual Thermal Impedance Junction to Ambient between Low Side Chips

Equation 1: pulse calculation formula

$$Z_{TH\delta} = R_{TH} \times \delta + Z_{THtp}(1 - \delta)$$

where $\delta = t_p / T$

a. Calculation is valid in any dynamic operating condition. P_d values set by user.

Figure 15. PowerSSO-36 HSD thermal impedance junction ambient single pulse



Figure 16. PowerSSO-36 LSD thermal impedance junction ambient single pulse

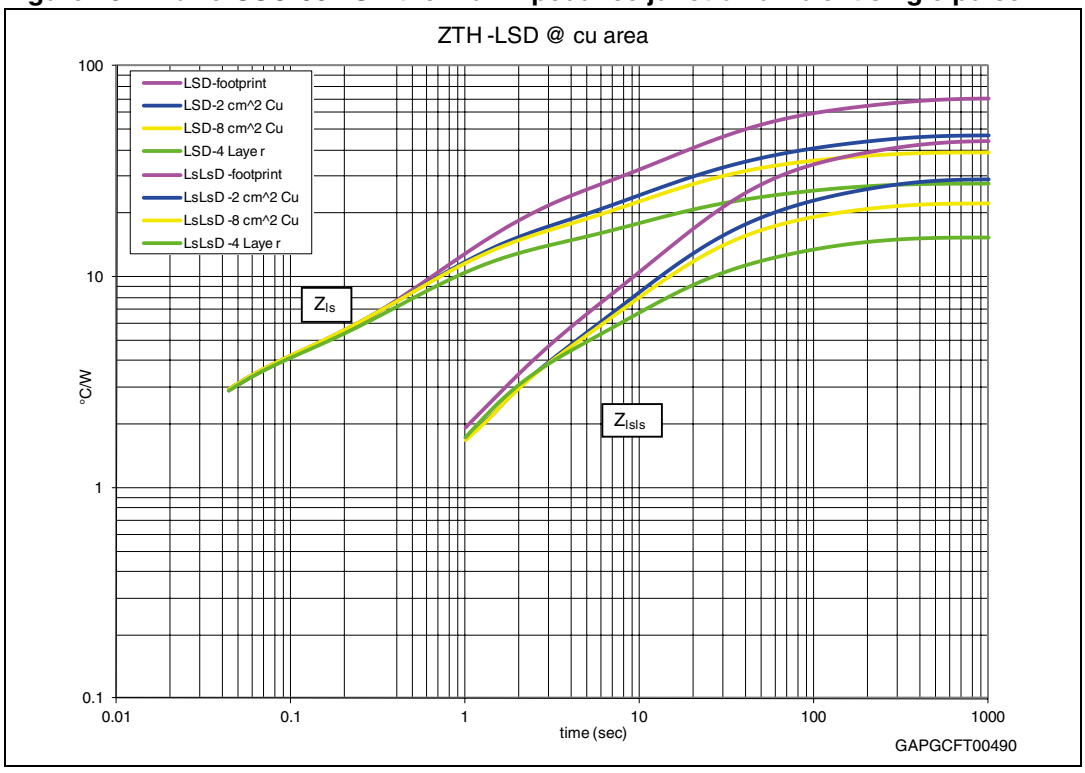


Figure 17. Thermal fitting model of an H-bridge in PowerSSO-36

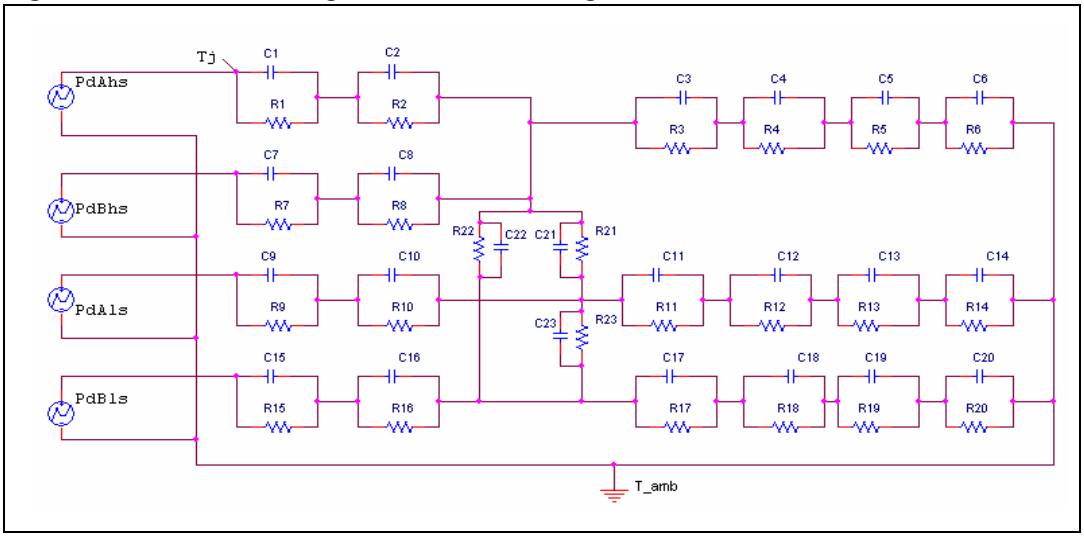


Table 15. Thermal parameters(1)

Area/island (cm^2)	Footprint	2	8	4L
R1 = R7 (°C/W)	0.2			
R2 = R8 (°C/W)	1.6			
R3 (°C/W)	8			
R4 (°C/W)	30	16	16	10
R5 (°C/W)	40	22	12	5
R6 (°C/W)	36	28	10	6
R9 = R15 (°C/W)	0.1			
R10 = R16 (°C/W)	2.8			
R11 = R17 (°C/W)	22	14	14	14
R12 = R18 (°C/W)	49	30	30	20
R13 = R19 (°C/W)	52	36	28	16
R14 = R20 (°C/W)	50	32	26	18
R21 = R22 (°C/W)	80	60	50	40
R23 (°C/W)	80	50	45	30
C1 = C7 = C9 = C15 (W.s/°C)	0.001			
C2 = C8 (W.s/°C)	0.009			
C3 (W.s/°C)	0.09			
C4 (W.s/°C)	0.5	0.8	0.8	0.8
C5 (W.s/°C)	0.8	1.4	2	3
C6 (W.s/°C)	5	6	8	10
C10 = C16 (W.s/°C)	0.1			
C11 = C17 (W.s/°C)	0.07			
C12 = C18 (W.s/°C)	0.45	0.45	0.45	0.6
C13 = C19 (W.s/°C)	0.8	1	1.2	2.5
C14 = C20 (W.s/°C)	4	5	6	8
C21 = C22 = C23 (W.s/°C)	0.01	0.006	0.005	0.005

1. The blank space means that the value is the same as the previous one.

4 Package and packing information

4.1 ECOPACK® packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.

ECOPACK® is an ST trademark.

4.2 PowerSSO-36 TP package information

Figure 18. PowerSSO-36 TP package dimensions


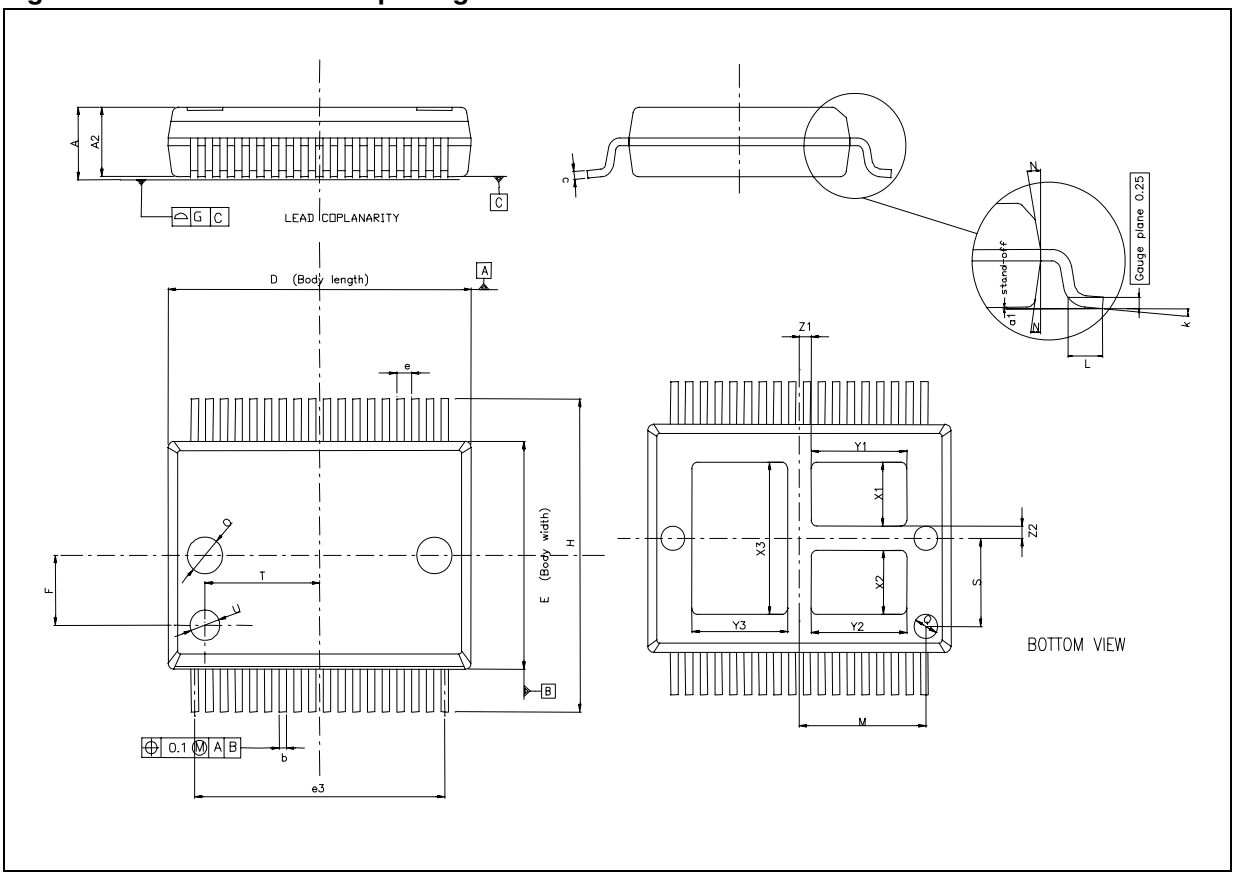


Table 16. PowerSSO-36 TP mechanical data

Symbol	Millimeters		
	Min.	Typ.	Max.
A	2.15		2.47
A2	2.15		2.40
a1	0		0.1
b	0.18		0.36
c	0.23		0.32
D	10.10		10.50
E	7.4		7.6
e		0.5	
e3		8.5	
F		2.3	
G			0.1
H	10.1		10.5
h			0.4
k	0 deg		8 deg
L	0.6		1
M		4.3	
N			10 deg
O		1.2	
Q		0.8	
S		2.9	
T		3.65	
U		1.0	
X1	1.85		2.35
Y1	3		3.5
X2	1.85		2.35
Y2	3		3.5
X3	4.7		5.2
Y3	3		3.5
Z1		0.4	
Z2		0.4	

4.3 PowerSSO-36 TP packing information


Figure 19. PowerSSO-36 TP tube shipment (no suffix)



Base Qty	49
Bulk Qty	1225
Tube length (±0.5)	532
A	3.5
B	13.8
C (±0.1)	0.6

All dimensions are in mm.

Figure 20. PowerSSO-36 TP tape and reel shipment (suffix "TR")

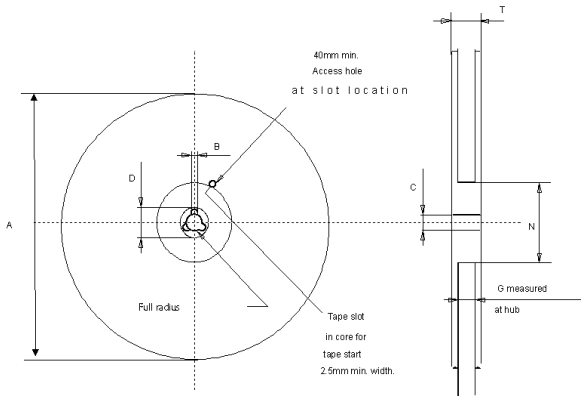

Reel dimensions


Base Qty	1000
Bulk Qty	1000
A (max)	330
B (min)	1.5
C (±0.2)	13
F	20.2
G (+2 / -0)	24.4
N (min)	100
T (max)	30.4

Tape dimensions


According to Electronic Industries Association (EIA) Standard 481 rev. A, Feb. 1986


Tape width	**W**	24
Tape Hole Spacing	**P0 (±0.1)**	4
Component Spacing	**P**	12
Hole Diameter	**D (±0.05)**	1.55
Hole Diameter	**D1 (min)**	1.5
Hole Position	**F (±0.1)**	11.5
Compartment Depth	**K (max)**	2.85
Hole Spacing	**P1 (±0.1)**	2

All dimensions are in mm.

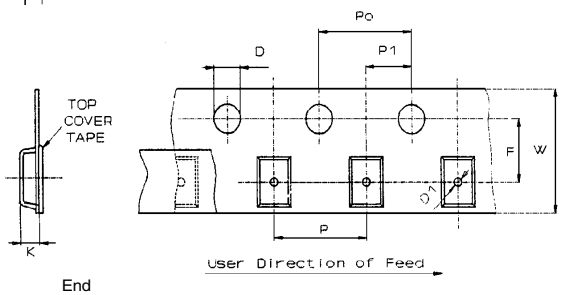

End

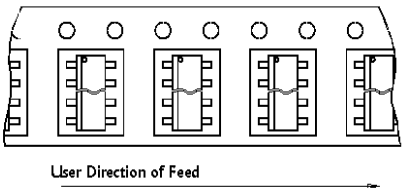

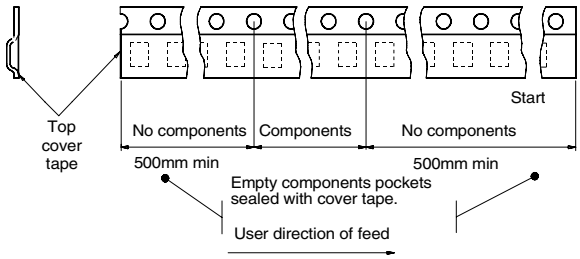

5 Revision history

Table 17. Document revision history

Date	Revision	Changes
07-Nov-2011	1	Initial release
18-Jan-2012	2	Changed document status from preliminary data to datasheet.
20-Jan-2012	3	Updated features list.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER’S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com