


Sketch with main dimensions

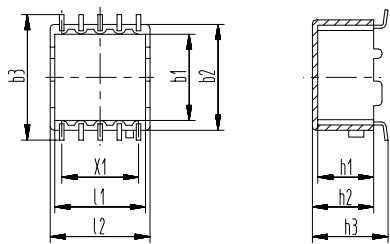

Boxes with pins 0,4 x 0,6 mm, preferably for ISDN interface transducers.

Available fully fitted only.


Standard material: PPS - GV
(Polyphenylensulfide UL94-V0).

Special material on request.

Pattern for X 1:

Wz7658
2,54 5,08 2,54
■ ■ ■ ■


Box for toroids
for SMD mounting



SMD

b1 ± 0,2	b2 ± 0,2	b3 ± 0,3	h1 ± 0,2	h2 ± 0,2	h3 ± 0,2	l1 ± 0,2	l2 ± 0,2	X1 ± 0,2	X3 ①	Type	Art. No.
8,8	11,5	14,4	5,5	6,6	7,6	8,7	9,9	3x2,54	2x4	VR-SMD 9/9-8 Wz 7767	3490
11,5	13,9	16,6	7,5	8	10	12	13,1	2x2,54 1x5,08	2x4	VR-SMD 11/12-8 Wz 7658	3369
11,5	13,9	16,6	7,5	8	10	12	13,1	4x2,54	2x5	VR-SMD 11/12-10 Wz 7664	3373

Sketch with main dimensions

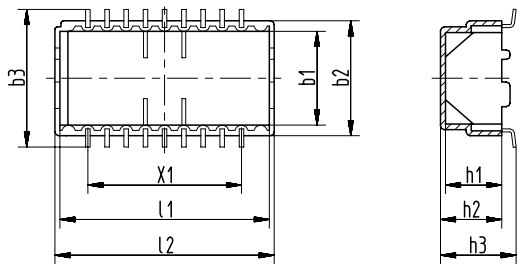


Boxes with pins 0,4 x 0,6 mm, preferably for ISDN interface transducers.

Available fully fitted only.

Standard material: PPS - GV
(Polyphenylensulfide UL94-V0).

Special material on request.

Box for toroids
for SMD mounting



SMD

b1 ± 0,2	b2 ± 0,2	b3 ± 0,3	h1 ± 0,2	h2 ± 0,2	h3 ± 0,2	l1 ± 0,2	l2 ± 0,2	X1 ± 0,2	X3 ①	Type	Art. No.
12,4	15,2	18,3	7,6	8,1	10	28	29	8x2,54	2x9	VR-SMD 12/28-18 Wz 7612	3299

① X3 = max. number of slots or terminals