
FRED Pt™
Ultrafast Soft Recovery Diode, 360 A



TO-244



FEATURES

- Very low Q_{rr} and t_{rr}
- Lead (Pb)-free
- Designed and qualified for industrial level

Pb-free

RoHS COMPLIANT

BENEFITS

- Reduced RFI and EMI
- Higher frequency operation
- Reduced snubbing

PRODUCT SUMMARY	
$I_{F(AV)}$	360 A
V_R	400 V
Q_{rr} (typical)	1250 nC
t_{rr}	40 ns

DESCRIPTION

FRED Pt™ diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for HF welding, power converters and other applications where switching losses are a significant portion of the total losses.

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	**SYMBOL**	**TEST CONDITIONS**	**MAX.**	**UNITS**
Cathode to anode voltage	V_R		400	V
Continuous forward current per diode	$I_{F(AV)}$	T_C = 25 °C	510	A
		T_C = 85 °C	305	
		T_C = 116 °C	180	
Single pulse forward current per diode	I_{FSM}		1200	
Maximum power dissipation	P_D	T_C = 25 °C	570	W
		T_C = 110 °C	180	
Operating junction and storage temperatures	T_J, T_{Stg}		- 40 to 150	°C

ELECTRICAL SPECIFICATIONS PER LEG (T_J = 25 °C unless otherwise specified)						
PARAMETER	**SYMBOL**	**TEST CONDITIONS**	**MIN.**	**TYP.**	**MAX.**	**UNITS**
Breakdown voltage	V_{BR}	I_R = 100 µA	400	-	-	V
Forward voltage	V_{FM}	I_F = 180 A	-	1.09	1.27	
		I_F = 360 A	-	1.23	1.50	
		I_F = 180 A, T_J = 175 °C	-	0.88	0.96	
		I_F = 360 A, T_J = 175 °C	-	1.04	1.18	
Reverse leakage current	I_{RM}	T_J = 150 °C, V_R = V_R rated	-	0.26	1.28	mA
Series inductance	L_S	From top of terminal hole to mounting plane	-	5	-	nH

DYNAMIC RECOVERY CHARACTERISTICS (T_J = 25 °C unless otherwise specified)							
PARAMETER	**SYMBOL**	**TEST CONDITIONS**		**MIN.**	**TYP.**	**MAX.**	**UNITS**
Reverse recovery time	t_{rr}	I_F = 1.0 A, dI_F/dt = 200 A/µs, V_R = 30 V		-	40	69	ns
		T_J = 25 °C	I_F = 180 A, dI_F/dt = 200 A/µs, V_R = 200 V	-	74	-	
		T_J = 150 °C		-	171	-	
Peak recovery current	I_{RRM}	I_F = 1.0 A, dI_F/dt = 200 A/µs, V_R = 30 V		-	5.1	-	A
		I_F = 180 A, dI_F/dt = 200 A/µs, V_R = 200 V		-	6.6	-	
		I_F = 180 A, dI_F/dt = 200 A/µs, V_R = 200 V, T_J = 150 °C		-	15.2	-	
Reverse recovery charge	Q_{rr}	I_F = 1.0 A, dI_F/dt = 200 A/µs, V_R = 30 V		-	125	-	nC
		I_F = 180 A, dI_F/dt = 200 A/µs, V_R = 200 V		-	243	-	
		I_F = 180 A, dI_F/dt = 200 A/µs, V_R = 200 V, T_J = 150 °C		-	1295	-	

THERMAL - MECHANICAL SPECIFICATIONS						
PARAMETER		**SYMBOL**	**MIN.**	**TYP.**	**MAX.**	**UNITS**
Thermal resistance, junction to case	per leg	R_{thJC}	-	-	0.19	°C/W
	per module		-	-	0.095	
Thermal resistance, case to heatsink (flag greased surface)		R_{thCS}	-	0.10	-	
Weight			-	68	-	g
			-	2.4	-	oz.
Mounting torque			30 (3.4)	-	40 (4.6)	lbf · in (N · m)
Mounting torque center hole			12 (1.4)	-	18 (2.1)	
Terminal torque			30 (3.4)	-	40 (4.6)	
Vertical pull			-	-	80	lbf · in
2" lever pull			-	-	35	

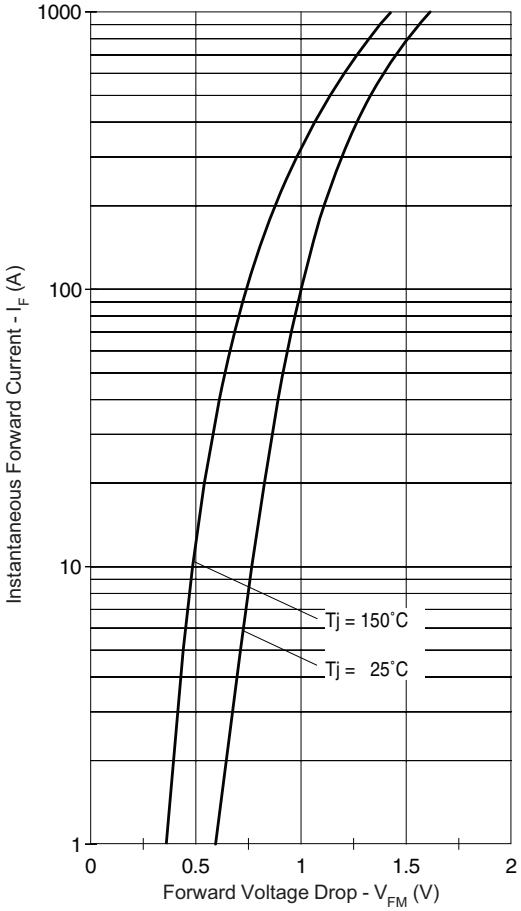


Fig. 1 - Typical Forward Voltage Drop vs. Instantaneous Forward Current (Per Leg)

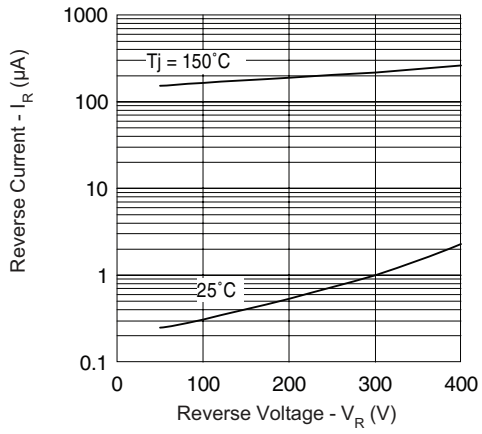


Fig. 2 - Typical Reverse Current vs. Reverse Voltage (Per Leg)

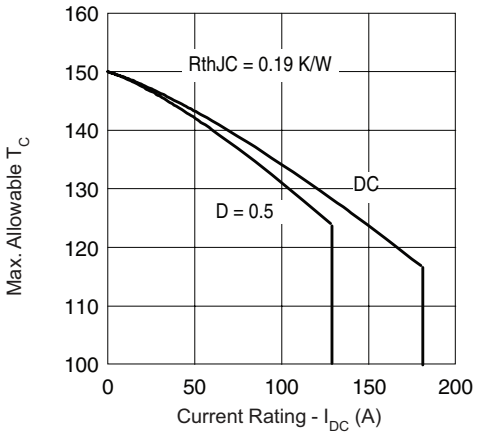


Fig. 3 - Maximum Current Rating Capability (Per Leg)

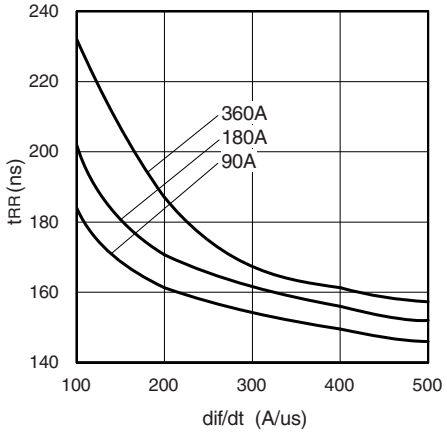


Fig. 4 - Typical Reverse Recovery Time vs. dI_F/dt
T_J = 125 °C (Per Leg)

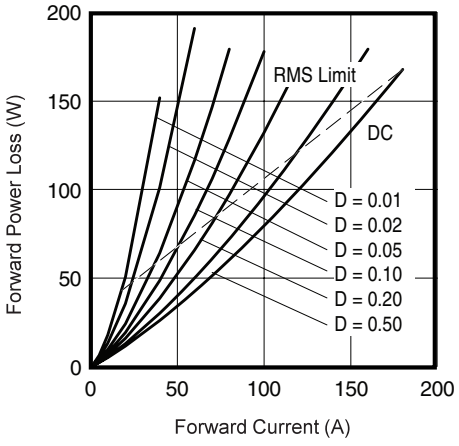


Fig. 5 - Forward Power Loss Characteristics


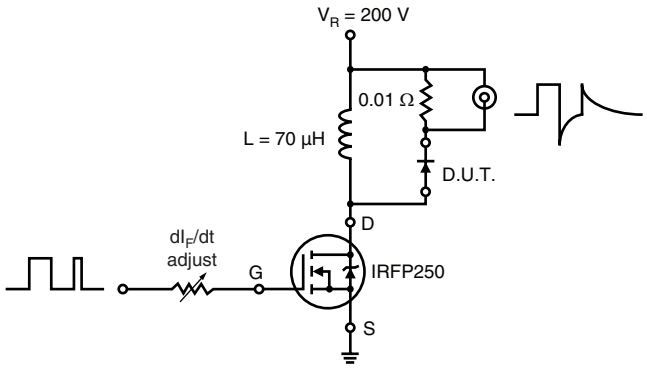


Fig. 6 - Reverse Recovery Parameter Test Circuit

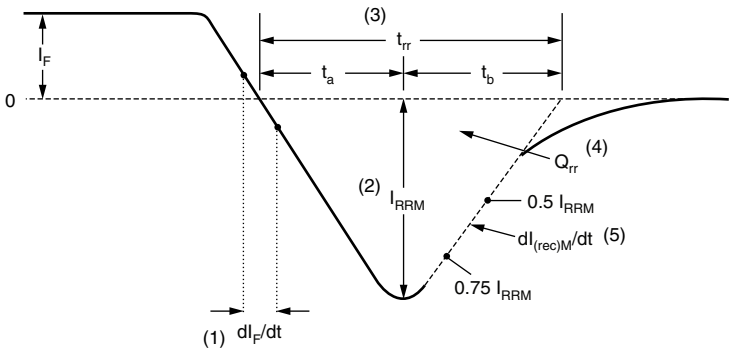

(1) dI_F/dt - rate of change of current through zero crossing

(2) I_{RRM} - peak reverse recovery current

(3) t_{rr} - reverse recovery time measured from zero crossing point of negative going I_F to point where a line passing through 0.75 I_{RRM} and 0.50 I_{RRM} extrapolated to zero current.

(4) Q_{rr} - area under curve defined by t_{rr} and I_{RRM}

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$

(5) $dI_{(rec)M}/dt$ - peak rate of change of current during t_b portion of t_{rr}

Fig. 7 - Reverse Recovery Waveform and Definitions

ORDERING INFORMATION TABLE

Device code

VS	UD	360	C	W	40
1	2	3	4	5	6

- 1 - Vishay HPP
- 2 - Type of device: UD = FRED Pt™
- 3 - Current rating (360 = 360 A)
- 4 - Circuit configuration:
  C = Common cathode
- 5 - Type of device:
  W = TO-244 wire bondable not isolated
- 6 - Voltage rating (40 = 400 V)

LINKS TO RELATED DOCUMENTS	
Dimensions	http://www.vishay.com/doc?95021

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.