AC Controller Modules

I_{RMS} = 2x 45 A
V_{RRM} = 800-1600 V

V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V	Type
800	800	VW2x45-08io1
1200	1200	VW2x45-12io1
1400	1400	VW2x45-14io1
1600	1600	VW2x45-16io1



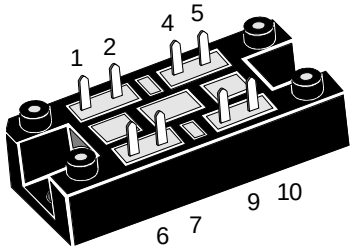

Symbol	Test Conditions		Maximum Ratings	
I_{RMS}	T_C = 85°C, (per phase)		45	A
I_{TRMS}	$T_{VJ} = T_{VJM}$		32	A
I_{TAVM}	T_C = 85°C; (180° sine ; per thyristor)		20	A
I_{TSM}	T_{VJ} = 45°C;	t = 10 ms (50 Hz), sine	300	A
	V_R = 0	t = 8.3 ms (60 Hz), sine	320	A
	$T_{VJ} = T_{VJM}$	t = 10 ms (50 Hz), sine	270	A
	V_R = 0	t = 8.3 ms (60 Hz), sine	290	A
I^2t	T_{VJ} = 45°C	t = 10 ms (50 Hz), sine	450	A^2s
	V_R = 0	t = 8.3 ms (60 Hz), sine	430	A^2s
	$T_{VJ} = T_{VJM}$	t = 10 ms (50 Hz), sine	360	A^2s
	V_R = 0	t = 8.3 ms (60 Hz), sine	350	A^2s
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ f =50 Hz, t_P =200 µs V_D = 2/3 V_{DRM}	repetitive, I_T = 45 A	100	A/µs
	I_G = 0.45 A di_G/dt = 0.45 A/µs	non repetitive, $I_T = I_{TAVM}$	500	A/µs
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$; $R_{GK} = \infty$; method 1 (linear voltage rise)	V_{DR} = 2/3 V_{DRM}	1000	V/µs
P_{GM}	$T_{VJ} = T_{VJM}$	t_p = 30 µs	10	W
	$I_T = I_{TAVM}$	t_p = 300 µs	5	W
P_{GAVM}			0.5	W
V_{RGM}			10	V
T_{VJ}			-40...+125	°C
T_{VJM}			125	°C
T_{stg}			-40...+125	°C
V_{ISOL}	50/60 Hz, RMS	t = 1 min	3000	V~
	$I_{ISOL} \leq$ 1 mA	t = 1 s	3600	V~
M_d	Mounting torque (M5)		2-2.5/18-22	Nm/lb.in.
Weight	typ.		35	g

Features

- Thyristor controller for AC (circuit W2C acc. to IEC) for mains frequency
- Soldering connections for PCB mounting
- Isolation voltage 3600 V~
- Planar passivated chips
- UL applied

Applications

- Switching and control of three phase AC circuits
- Softstart AC motor controller
- Solid state switches
- Light and temperature control

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling

Data according to IEC 60747 refer to a single thyristor/diode unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions

739

© 2000 IXYS All rights reserved

Symbol	Test Conditions		Characteristic Values		
I_D, I_R	$T_{VJ} = T_{VJM}$; $V_R = V_{RRM}$; $V_D = V_{DRM}$		≤	5	mA
V_T	I_T = 45 A; T_{VJ} = 25°C		≤	1.52	V
V_{T0}	For power-loss calculations only			0.85	V
r_T				15	mΩ
V_{GT}	V_D = 6 V;	T_{VJ} = 25°C	≤	1.5	V
		T_{VJ} = -40°C	≤	1.6	V
I_{GT}	V_D = 6 V;	T_{VJ} = 25°C	≤	100	mA
		T_{VJ} = -40°C	≤	200	mA
V_{GD}	$T_{VJ} = T_{VJM}$;	V_D = 2/3 V_{DRM}	≤	0.2	V
I_{GD}			≤	5	mA
I_L	T_{VJ} = 25°C; t_P = 10 µs I_G = 0.45 A; di_G/dt = 0.45 A/µs		≤	450	mA
I_H	T_{VJ} = 25°C; V_D = 6 V; R_{GK} = ∞		≤	200	mA
t_{gd}	T_{VJ} = 25°C; V_D = 1/2 V_{DRM} I_G = 0.45 A; di_G/dt = 0.45 A/µs		≤	2	µs
t_q	$T_{VJ} = T_{VJM}$; I_T = 20 A, t_P = 200 µs; di/dt = -10 A/µs V_R = 100 V; dv/dt = 15 V/µs; V_D = 2/3 V_{DRM}		typ.	150	µs
R_{thJC}	per thyristor; DC			1.25	K/W
	per module			0.31	K/W
R_{thJK}	per thyristor; DC			1.55	K/W
	per module			0.39	K/W
d_S	Creeping distance on surface			12.7	mm
d_A	Creepage distance in air			9.4	mm
a	Max. allowable acceleration			50	m/s²

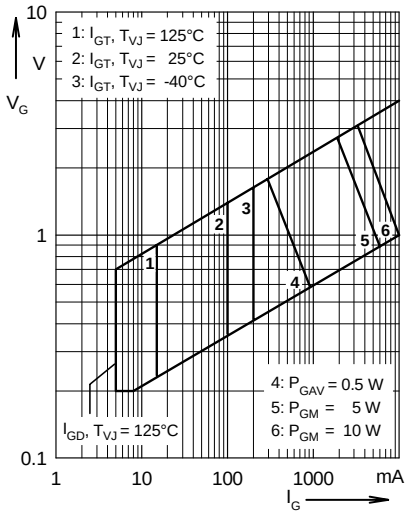

Fig. 1 Gate trigger characteristics

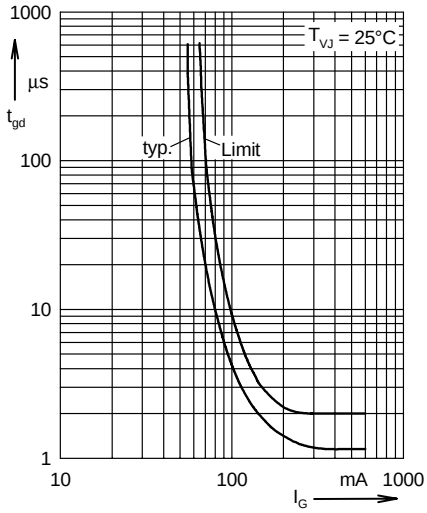

Fig. 2 Gate trigger delay time

Dimensions in mm (1 mm = 0.0394")

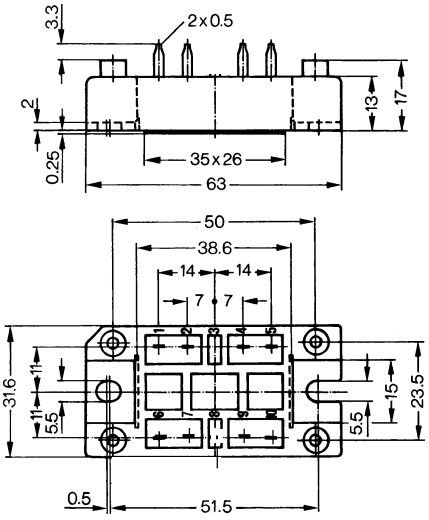

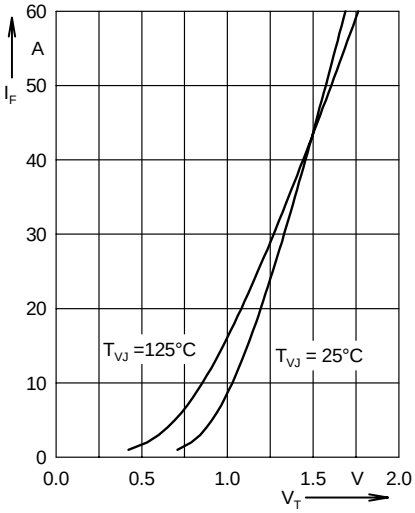

Fig. 3 Forward current versus voltage drop per leg

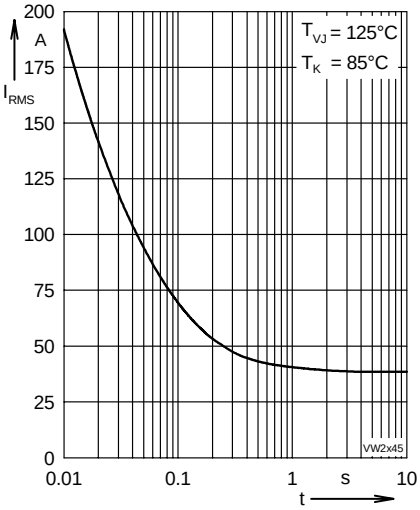

Fig. 4 Rated RMS current versus time (360° conduction)

739

© 2000 IXYS All rights reserved

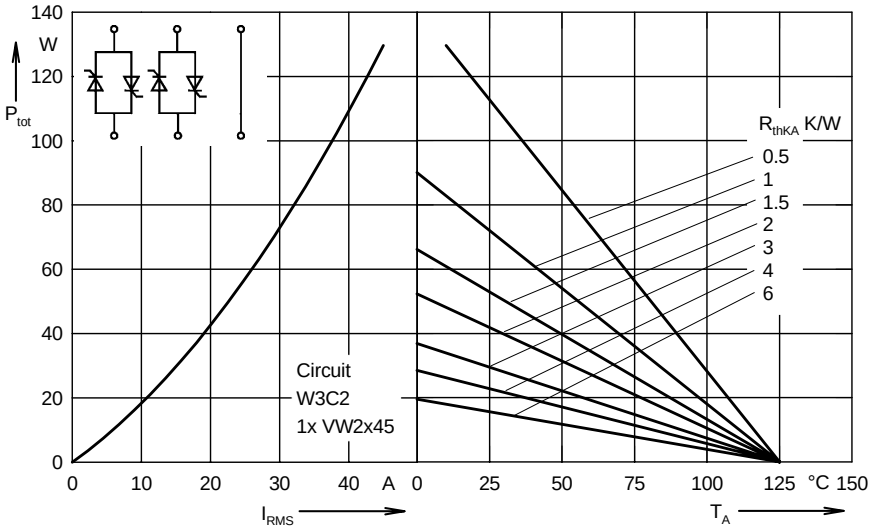

Fig. 5 Load current capability for two phase AC controller

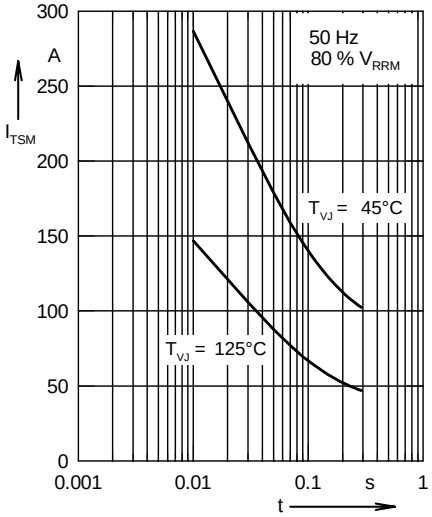

Fig. 6 Surge overload current

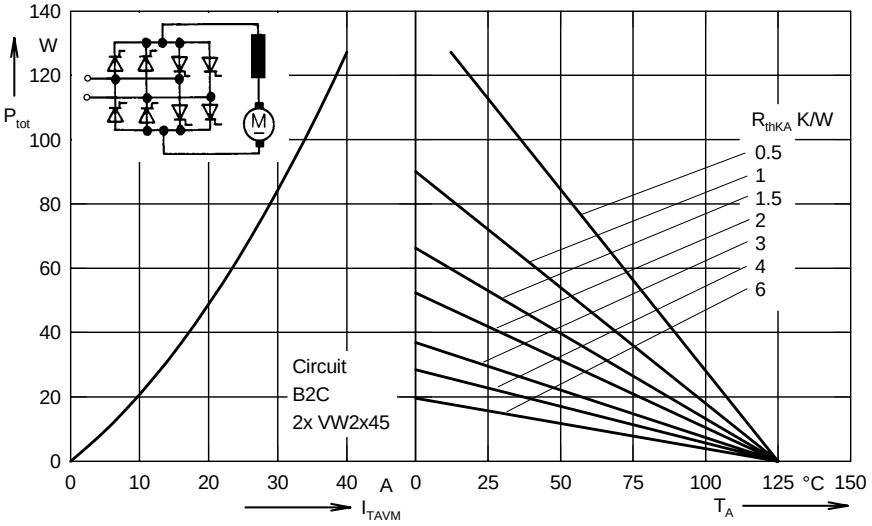

Fig. 7 Power dissipation versus direct output current and ambient temperature cyclo converter, four quadrant operation

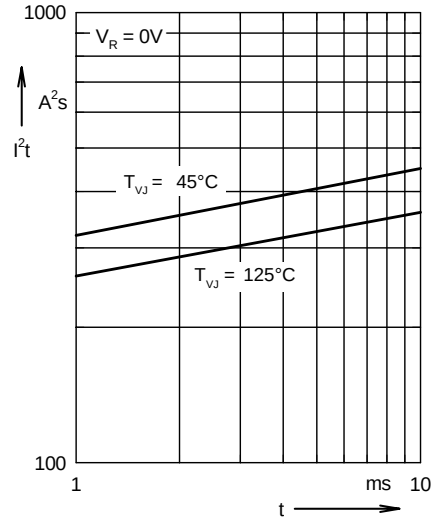

Fig. 8 I²t versus time (per thyristor)

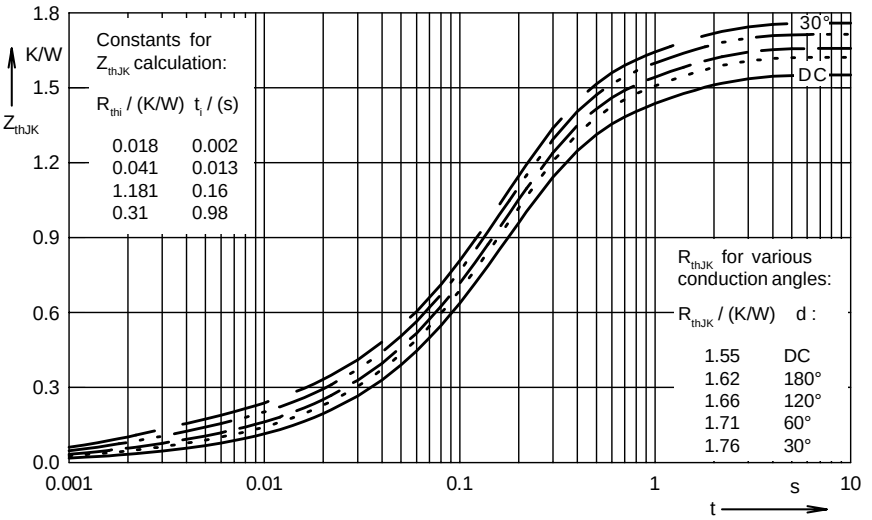

Fig. 9 Transient thermal impedance junction to heatsink (per thyristor)

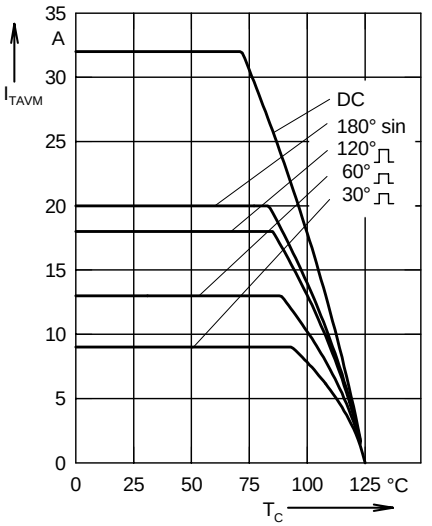

Fig. 10 Maximum forward current at case temperature

739

© 2000 IXYS All rights reserved