
W15

15 Watt - Single Output Regulated Power Supplies



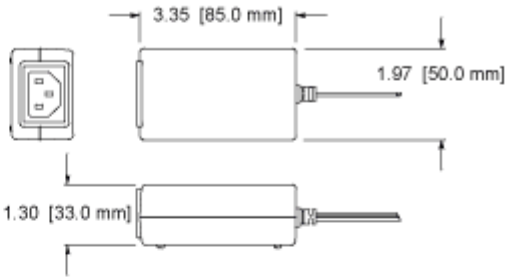

Features:
Wide Range AC input
Fully enclosed plastic case
Fully regulated output
High Efficiency
Warranty: 5 years

Environmental
Operating temperature....0° C to 40° C
Storage temperature.....-20° C to 85° C
Weight: 0.8 lbs

EMI
Meets FCC class B, CISPR 22 class B

Safety
UL 1950
cUL to CSA 950
CE mark
TUV licensed to EN60950

Polarity: COM +V

Electrical specifications

Input
Voltage.....100-240VAC(90-264VAC)
Current.....1A max @ 90VAC
Frequency.....47-63 Hz
A/C cord.....Included - 6 foot cord
Input connector.....3 Pin IEC 320 receptacle

Output
Line regulation.....TYP 1%
Load regulation..... 5% Max
Set point..... 5% of rated output
Hold up time.....20 ms min. at full load, 115 VAC
Over voltage protection.....Built-in
Over current protection.....Built-in
Short circuit protection.....Pulsing mode, auto recovery
Ripple/noise(Vp-p).....1%
Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

Output Electrical Specifications

Model No.	Voltage	Power	Current
W1507-760	7	15	2.1A
W1515-760	15	15	1

ELPAC POWER SYSTEMS (949) 476-6070, www.elpac.com, sales@elpac.com

29

Quality Power Supplies | Agency Certifications | Output Connectors | Custom Requests | About Us | Qu
Management Team | Job Opportunites | Elpac News | Sales Representatives | Distributors | Catalog Reque
Power Supplies | External Power Supplies | Open Frame Power Supplies | Medical Power Supplies | Custor

Copyright © 2003, Elpac Power Supp