
isc N-Channel MOSFET Transistor W15NK90Z

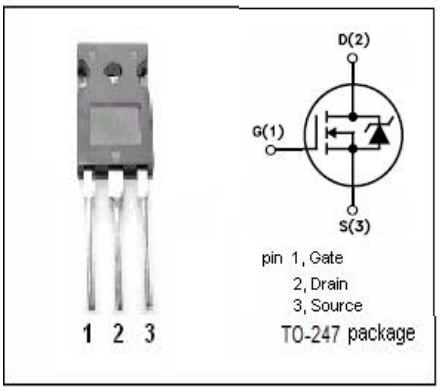


• FEATURES

- With TO-247 packaging
- With low gate drive requirements
- Easy to drive
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS

- Switching applications

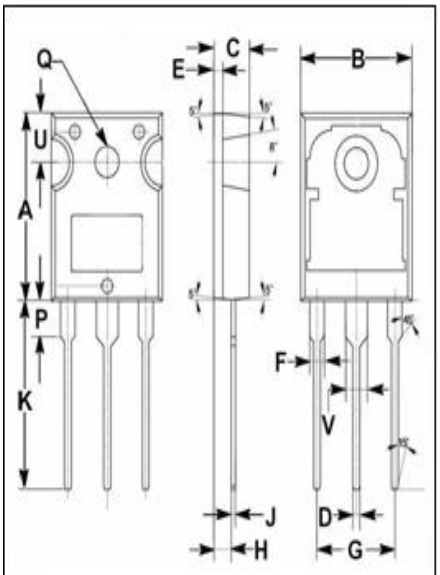

DIM	mm MIN	mm MAX
A	19.80	20.20
B	15.40	15.80
C	4.90	5.10
D	0.90	1.10
E	1.40	1.60
F	1.90	2.10
G	10.80	11.00
H	2.40	2.60
J	0.50	0.70
K	19.50	20.50
P	3.90	4.10
Q	3.30	3.50
U	5.20	5.40
V	2.90	3.10

• ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	900	V
V_{GSS}	Gate-Source Voltage	±30	V
I_D	Drain Current-Continuous@Tc=25℃ Tc=100℃	15 9.5	A
I_{DM}	Drain Current-Single Pulsed	60	A
P_D	Total Dissipation	350	W
T_j	Operating Junction Temperature	-55~150	℃
T_{stg}	Storage Temperature	-55~150	℃

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
Rth(ch-c)	Channel-to-case thermal resistance	0.7	℃/W

Download from alldatasheet.com

isc N-Channel MOSFET Transistor W15NK90Z

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V; I_D= 1.0mA	900			V
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}; I_D=0.15mA	3.0		4.5	V
$R_{DS(on)}$	Drain-Source On-Resistance	V_{GS}= 10V; I_D=7.5A		400	550	mΩ
I_{GSS}	Gate-Source Leakage Current	V_{GS}= ±20V;V_{DS}= 0V			±0.1	μA
I_{DSS}	Drain-Source Leakage Current	V_{DS}= 900V; V_{GS}= 0V;@Tc=25℃ V_{DS}= 900V; V_{GS}= 0V;Tc=125℃			1 50	μA
V_{SDF}	Diode forward voltage	I_{SD}=15A, V_{GS} = 0 V			1.6	V

Download from alldatasheet.com