WCMS0808C1X

32Kx8 Static RAM

Features

- **Low Voltage Range**
  - **4.5V–5.5V Operation**
- **Low active power**
  - **275 mW (max.)**
- **Low standby power**
  - **28 μW (max.)**
- **Easy memory expansion with CE and OE features**
- **TTL-compatible inputs and outputs**
- **Automatic power-down when deselected**
- **CMOS for optimum speed/power**


Functional Description

The WCMS0808C1X is a high-performance CMOS static RAM organized as 32K words by 8 bits. Easy memory expansion is provided by an active LOW chip enable ($\overline{CE}$) and active LOW output enable ($\overline{OE}$) and three-state drivers. This device has an automatic power-down feature, reducing the power consumption by 99.9% when deselected. The WCMS0808C1X is in the standard 450-mil-wide (300-mil body width) SOIC and packages.

An active LOW write enable signal ($\overline{WE}$) controls the writing/reading operation of the memory. When $\overline{CE}$ and $\overline{WE}$ inputs are both LOW, data on the eight data input/output pins (I/O_0 through I/O_7) is written into the memory location addressed by the address present on the address pins (A_0 through A_{14}). Reading the device is accomplished by selecting the device and enabling the outputs, $\overline{CE}$ and $\overline{OE}$ active LOW, while $\overline{WE}$ remains inactive or HIGH. Under these conditions, the contents of the location addressed by the information on address pins are present on the eight data input/output pins.


The input/output pins remain in a high-impedance state unless the chip is selected, outputs are enabled, and write enable ($\overline{WE}$) is HIGH.

Logic Block Diagram

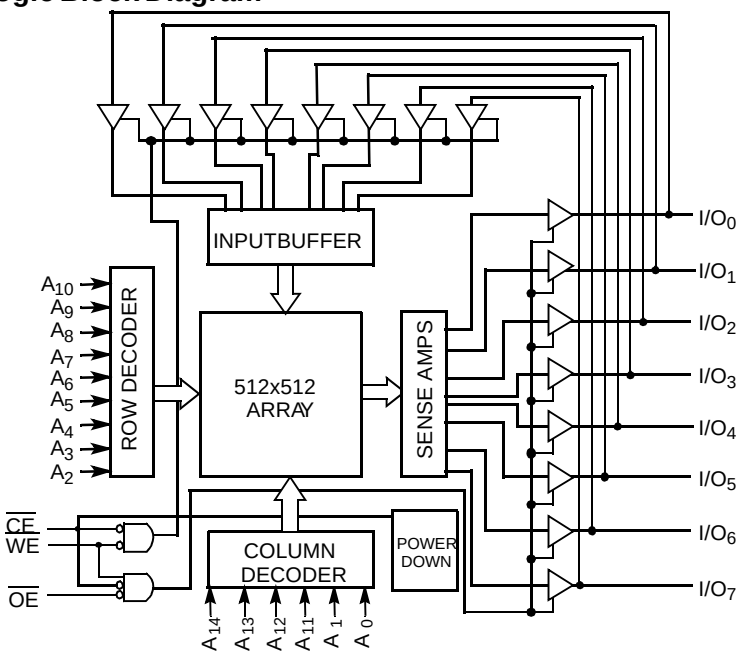


Pin Configurations

Narrow SOIC
Top View

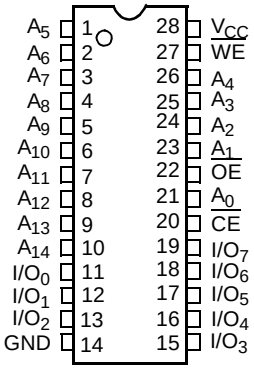

TSOP I
Top View
(not to scale)

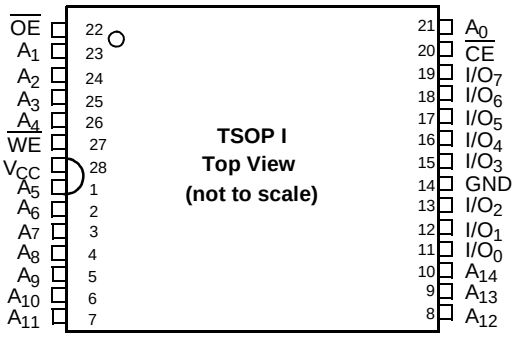

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature ..... –65°C to +150°C

Ambient Temperature with Power Applied..... 0°C to +70°C

Supply Voltage to Ground Potential (Pin 28 to Pin 14)..... –0.5V to +7.0V

DC Voltage Applied to Outputs in High Z State[1]..... –0.5V to V_{CC} + 0.5V

DC Input Voltage[1]..... –0.5V to V_{CC} + 0.5V

Output Current into Outputs (LOW)..... 20 mA

Static Discharge Voltage..... >2001V (per MIL-STD-883, Method 3015)

Latch-Up Current..... >200 mA

Operating Range

Range	Ambient Temperature	V_{CC}
Industrial	–40°C to +85°C	5V ± 10%

Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions	WCMS0808C1X			Unit
			Min.	Typ[2]	Max.	
V_{OH}	Output HIGH Voltage	V_{CC} = Min., I_{OH} = –1.0 mA	2.4			V
V_{OL}	Output LOW Voltage	V_{CC} = Min., I_{OL} = 2.1 mA			0.4	V
V_{IH}	Input HIGH Voltage		2.2		V_{CC} +0.5V	V
V_{IL}	Input LOW Voltage		–0.5		0.8	V
I_{IX}	Input Load Current	GND ≤ V_I ≤ V_{CC}	–0.5		+0.5	µA
I_{OZ}	Output Leakage Current	GND ≤ V_O ≤ V_{CC}, Output Disabled	–0.5		+0.5	µA
I_{CC}	V_{CC} Operating Supply Current	V_{CC} = Max., I_{OUT} = 0 mA, f = f_{MAX} = $1/t_{RC}$		25	50	mA
I_{SB1}	Automatic CE Power-Down Current—TTL Inputs	Max. V_{CC}, $\overline{CE}$ ≥ V_{IH}, V_{IN} ≥ V_{IH} or V_{IN} ≤ V_{IL}, f = f_{MAX}		0.3	0.5	mA
I_{SB2}	Automatic CE Power-Down Current—CMOS Inputs	Max. V_{CC}, $\overline{CE}$ ≥ V_{CC} – 0.3V V_{IN} ≥ V_{CC} – 0.3V or V_{IN} ≤ 0.3V, f = 0		0.1	10	µA

Capacitance[3]


Parameter	Description	Test Conditions	Max.	Unit
C_{IN}	Input Capacitance	T_A = 25°C, f = 1 MHz, V_{CC} = 5.0V	6	pF
C_{OUT}	Output Capacitance		8	pF


Note:

1. V_{IL} (min.) = –2.0V for pulse durations of less than 20 ns.
2. Typical specifications are the mean values measured over a large sample size across normal production process variations and are taken at nominal conditions (T_A = 25°C, V_{CC}). Parameters are guaranteed by design and characterization, and not 100% tested.
3. Tested initially and after any design or process changes that may affect these parameters.


*

AC Test Loads and Waveforms

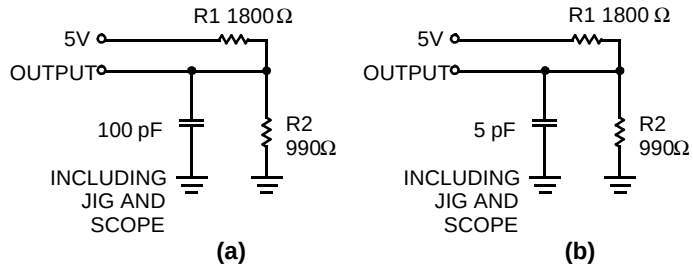

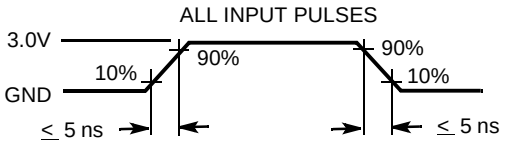


Equivalent to: THÉVENIN EQUIVALENT



Data Retention Characteristics

Parameter	Description	Conditions[4]	Min.	Typ.[2]	Max.	Unit
V_{DR}	V_{CC} for Data Retention	$\overline{V_{CC}}$ = 3.0V, $\overline{CE} \geq V_{CC} - 0.3V$, $V_{IN} \geq V_{CC} - 0.3V$ or $V_{IN} \leq 0.3V$	2.0			V
I_{CCDR}	Data Retention Current			0.1	10	µA
t_{CDR}[3]	Chip Deselect to Data Retention Time		0			ns
t_R[3]	Operation Recovery Time		t_{RC}			ns

Data Retention Waveform

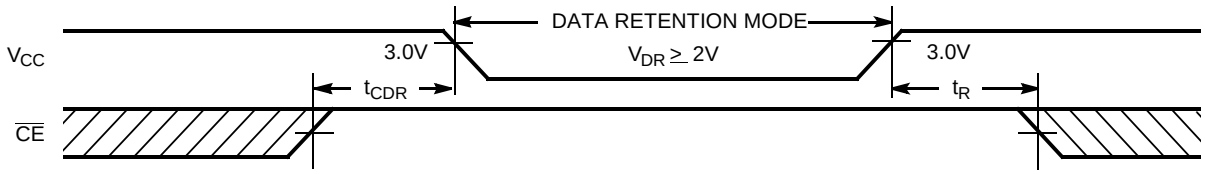

Note:
4. No input may exceed V_{CC}+0.5V.

*

Switching Characteristics Over the Operating Range[10]

Parameter	Description	WCMS0808C1X		Unit
		Min.	Max.	
READ CYCLE				
t_{RC}	Read Cycle Time	70		ns
t_{AA}	Address to Data Valid		70	ns
t_{OHA}	Data Hold from Address Change	5		ns
t_{ACE}	$\overline{CE}$ LOW to Data Valid		70	ns
t_{DOE}	$\overline{OE}$ LOW to Data Valid		35	ns
t_{LZOE}	$\overline{OE}$ LOW to Low Z[6]	5		ns
t_{HZOE}	$\overline{OE}$ HIGH to High Z[6, 7]		25	ns
t_{LZCE}	$\overline{CE}$ LOW to Low Z[6]	5		ns
t_{HZCE}	$\overline{CE}$ HIGH to High Z[6, 7]		25	ns
t_{PU}	$\overline{CE}$ LOW to Power-Up	0		ns
t_{PD}	$\overline{CE}$ HIGH to Power-Down		70	ns
WRITE CYCLE[8, 9]				
t_{WC}	Write Cycle Time	70		ns
t_{SCE}	$\overline{CE}$ LOW to Write End	60		ns
t_{AW}	Address Set-Up to Write End	60		ns
t_{HA}	Address Hold from Write End	0		ns
t_{SA}	Address Set-Up to Write Start	0		ns
t_{PWE}	$\overline{WE}$ Pulse Width	50		ns
t_{SD}	Data Set-Up to Write End	30		ns
t_{HD}	Data Hold from Write End	0		ns
t_{HZWE}	$\overline{WE}$ LOW to High Z[6, 7]		25	ns
t_{LZWE}	$\overline{WE}$ HIGH to Low Z[6]	5		ns


Notes:

5. Test conditions assume signal transition time of 5 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V, and output loading of the specified I_{OL}/I_{OH} and 100-pF load capacitance.
6. At any given temperature and voltage condition, t_{HZCE} is less than t_{LZCE}, t_{HZOE} is less than t_{LZOE}, and t_{HZWE} is less than t_{LZWE} for any given device.
7. t_{HZOE}, t_{HZCE}, and t_{HZWE} are specified with C_L = 5 pF as in part (b) of AC Test Loads. Transition is measured ±500 mV from steady-state voltage.
8. The internal write time of the memory is defined by the overlap of $\overline{CE}$ LOW and $\overline{WE}$ LOW. Both signals must be LOW to initiate a write and either signal can terminate a write by going HIGH. The data input set-up and hold timing should be referenced to the rising edge of the signal that terminates the write.
9. The minimum write cycle time for write cycle #3 ($\overline{WE}$ controlled, $\overline{OE}$ LOW) is the sum of t_{HZWE} and t_{SD}


*

Switching Waveforms

Read Cycle No. 1 [10,11]

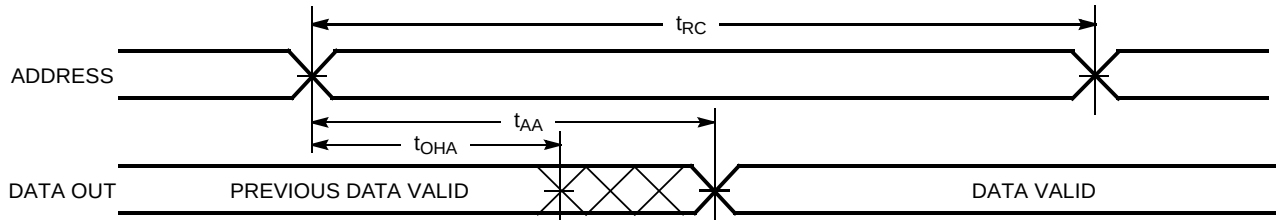

Read Cycle No. 2 [11,12]

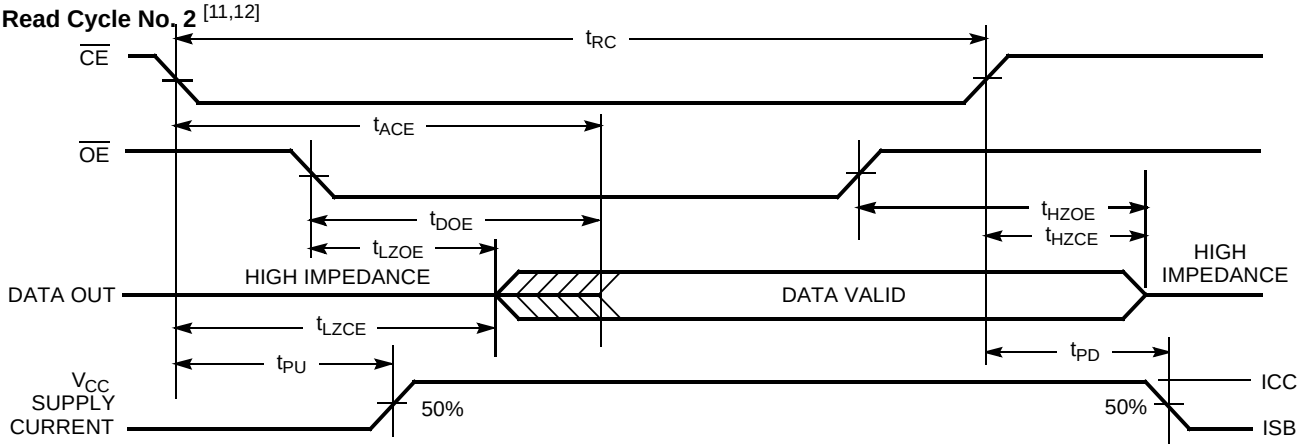


Notes:

10. Device is continuously selected. $\overline{OE}$, $\overline{CE}$ = V_{IL}.
11. $\overline{WE}$ is HIGH for read cycle.
12. Address valid prior to or coincident with $\overline{CE}$ transition LOW.


*

Switching Waveforms (continued)

Write Cycle No. 1 ($\overline{WE}$ Controlled) [8,13,14]

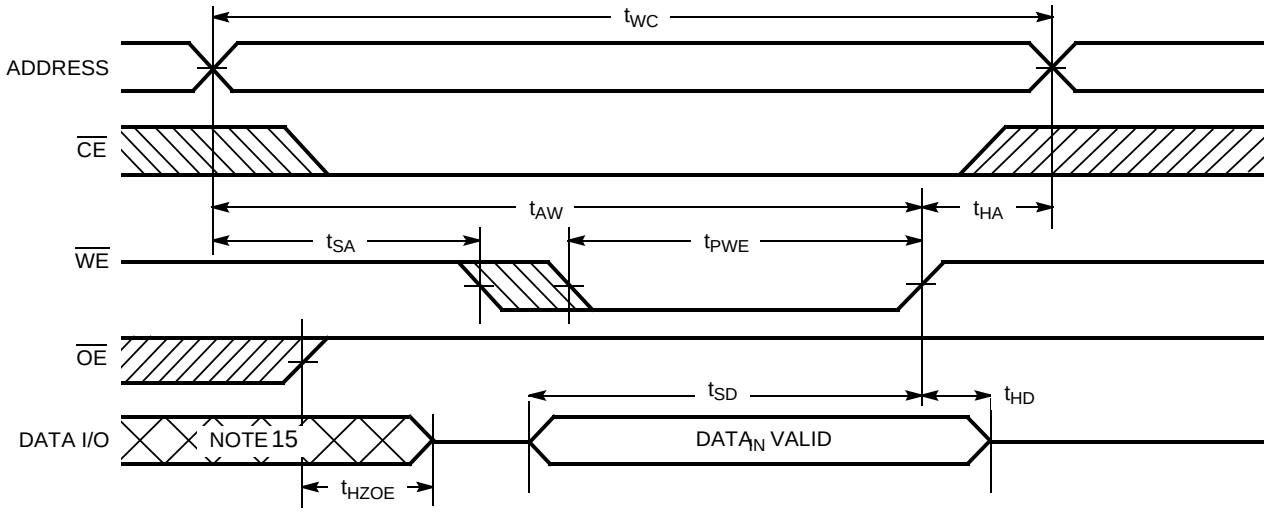

Write Cycle No. 2 ($\overline{CE}$ Controlled) [8,13,14]

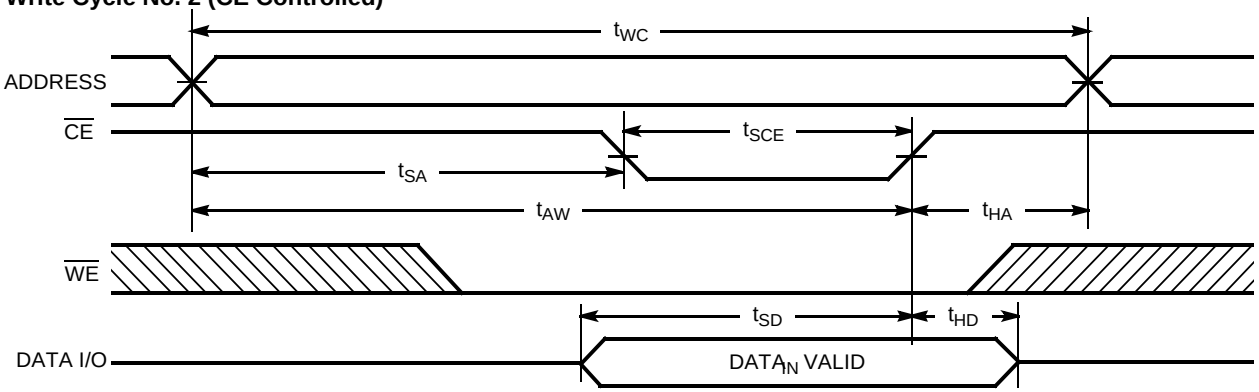


Notes:

13. Data I/O is high impedance if $\overline{OE} = V_{IH}$.
14. If $\overline{CE}$ goes HIGH simultaneously with $\overline{WE}$ HIGH, the output remains in a high-impedance state.

*

Switching Waveforms (continued)

Write Cycle No. 3 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW) [9,14]

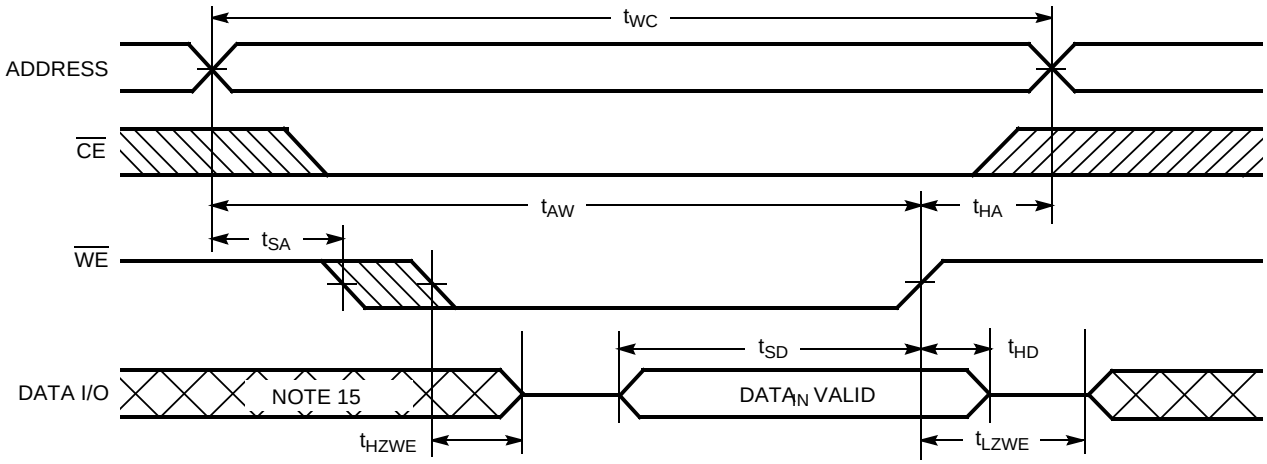

Note:
15. During this period, the I/Os are in output state and input signals should not be applied.

Truth Table

$\overline{CE}$	$\overline{WE}$	$\overline{OE}$	Inputs/Outputs	Mode	Power
H	X	X	High Z	Deselect/Power-Down	Standby (I_{SB})
L	H	L	Data Out	Read	Active (I_{CC})
L	L	X	Data In	Write	Active (I_{CC})
L	H	H	High Z	Deselect, Output Disabled	Active (I_{CC})


*

Ordering Information

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
70	WCMS0808C1X–NF70	N28	28-Lead 450-Mil (300-Mil Body Width) Narrow SOIC	Industrial
	WCMS0808C1X–TF70	T28	28-Lead Thin Small Outiline Package (TSOP)	

Package Diagrams


28-Lead 450-Mil (300-Mil Body Width) SOIC, N28

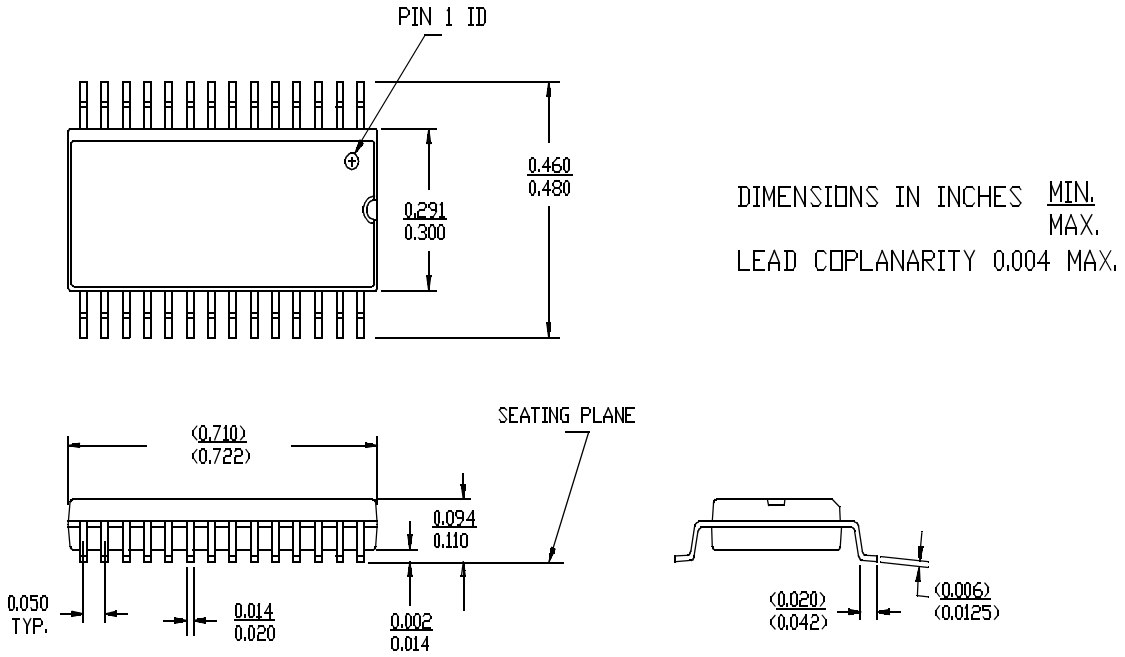

*

Package Diagrams (continued)

28-Lead Thin Small Outline Package, T28

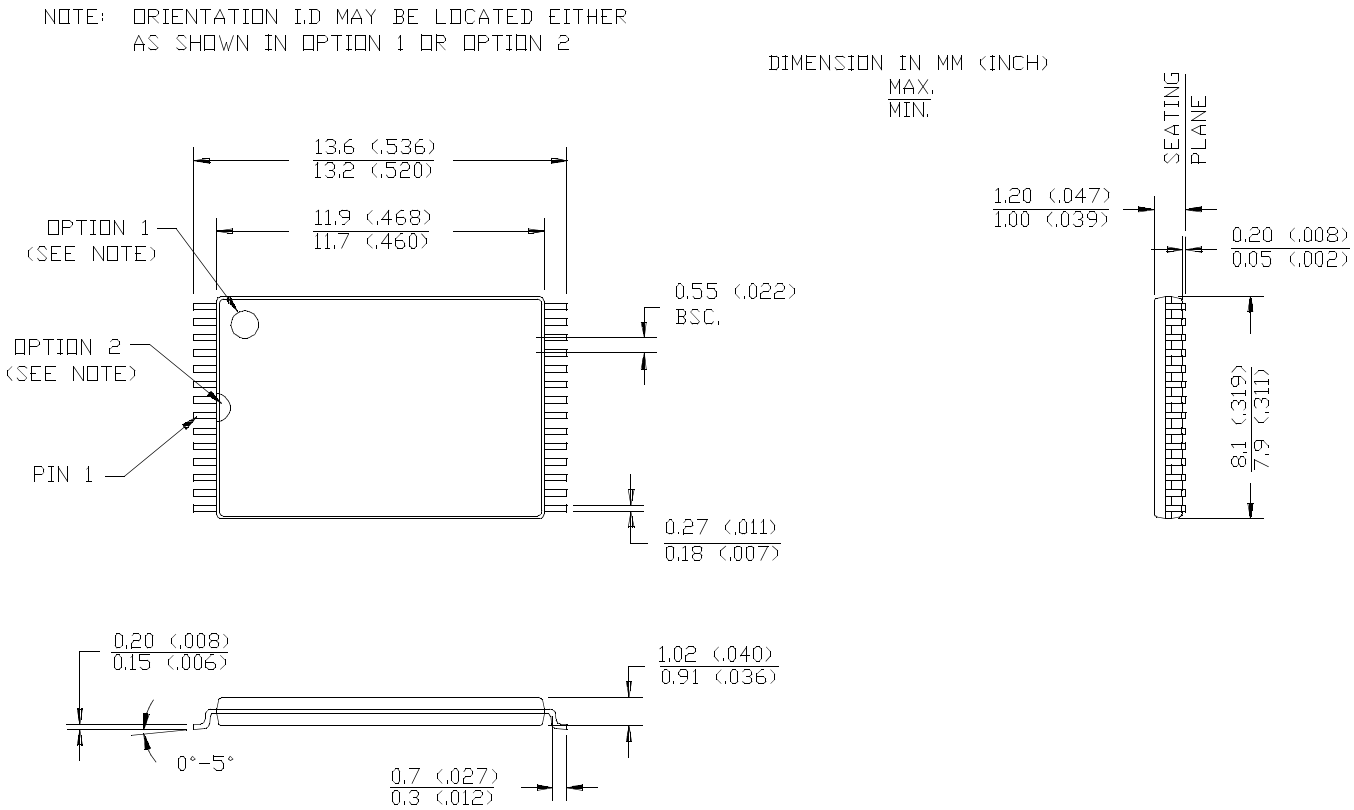

*

Document Title: WCMS0808C1X, 32K x 8 Static RAM					
REV.	**Spec #**	**ECN #**	**Issue Date**	**Orig. of Change**	**Description of Change**
**	38-14010	115225	1/17/02	MGN	New Datasheet