
WNM2020

N-Channel, 20V, 0.90A, Small Signal MOSFET

Http://www.sh-willsemi.com


V_{DS} (V)	Rds(on) (Ω)
20	0.220@ V_{GS}=4.5V
	0.260@ V_{GS}=2.5V
	0.320@ V_{GS}=1.8V



SOT-23

Descriptions


The WNM2020 is N-Channel enhancement MOS Field Effect Transistor. Uses advanced trench technology and design to provide excellent $R_{DS\ (ON)}$ with low gate charge. This device is suitable for use in DC-DC conversion, power switch and charging circuit. Standard Product WNM2020 is Pb-free and Halogen-free.



Pin configuration (Top view)

Features

- Trench Technology
- Supper high density cell design
- Excellent ON resistance
- Extremely Low Threshold Voltage
- Small package SOT-23



W28 = Device Code
* = Month (A~Z)

Marking

Applications

- DC-DC converter circuit
- Small Signal Switch
- Load Switch
- Level Shift
-

Order information

Device	Package	Shipping
WNM2020-3/TR	SOT-23	3000/Reel&Tape

Absolute Maximum ratings

Parameter		Symbol	10 S	Steady State	Unit
Drain-Source Voltage		V_{DS}	20		V
Gate-Source Voltage		V_{GS}	±6		
Continuous Drain Current [a]	T_A=25°C	I_D	0.90	0.83	A
	T_A=70°C		0.72	0.66	
Maximum Power Dissipation [a]	T_A=25°C	P_D	0.38	0.32	W
	T_A=70°C		0.24	0.20	
Continuous Drain Current [b]	T_A=25°C	I_D	0.79	0.71	A
	T_A=70°C		0.63	0.57	
Maximum Power Dissipation [b]	T_A=25°C	P_D	0.29	0.24	W
	T_A=70°C		0.19	0.15	
Pulsed Drain Current [c]		I_{DM}	1.4		A
Operating Junction Temperature		T_J	-55 to 150		°C
Lead Temperature		T_L	260		°C
Storage Temperature Range		T_{stg}	-55 to 150		°C

Thermal resistance ratings

Parameter		Symbol	Typical	Maximum	Unit
Junction-to-Ambient Thermal Resistance [a]	t ≤ 10 s	$R_{\theta JA}$	270	325	°C/W
	Steady State		320	385	
Junction-to-Ambient Thermal Resistance [b]	t ≤ 10 s	$R_{\theta JA}$	360	420	
	Steady State		425	520	
Junction-to-Case Thermal Resistance	Steady State	$R_{\theta JC}$	260	300	

a Surface mounted on FR4 Board using 1 square inch pad size, 1oz copper

b Surface mounted on FR4 board using minimum pad size, 1oz copper


c Repetitive rating, pulse width limited by junction temperature, t_p=10μs, Duty Cycle=1%

d Repetitive rating, pulse width limited by junction temperature T_J=150°C.


Electronics Characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	BV_{DSS}	V_{GS} = 0 V, I_D = 250uA	20			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} =16 V, V_{GS} =0V			1	uA
Gate-to-source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} =±5V			±5	uA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS} = V_{DS}, I_D = 250uA	0.45	0.58	0.85	V
Drain-to-source On-resistance	$R_{DS(on)}$	V_{GS} = 4.5V, I_D = 0.55A		220	310	mΩ
		V_{GS} = 2.5V, I_D = 0.45A		260	360	
		V_{GS} = 1.8V, I_D = 0.35A		320	460	
Forward Transconductance	g_{FS}	V_{DS} = 5 V, I_D = 0.55A		2.0		S
CHARGES, CAPACITANCES AND GATE RESISTANCE						
Input Capacitance	C_{ISS}	V_{GS} = 0 V, f = 100 kHz, V_{DS} = 10 V		50		pF
Output Capacitance	C_{OSS}			13		
Reverse Transfer Capacitance	C_{RSS}			8		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 4.5 V, V_{DS} = 10 V, I_D = 0.55A		1.15		nC
Threshold Gate Charge	$Q_{G(TH)}$			0.06		
Gate-to-Source Charge	Q_{GS}			0.15		
Gate-to-Drain Charge	Q_{GD}			0.23		
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	td(ON)	V_{DD}=10V, V_{GS}=4.5V, I_D =0.55A, R_G=6Ω		22		ns
Rise Time	tr			80		
Turn-Off Delay Time	td(OFF)			700		
Fall Time	tf			380		
BODY DIODE CHARACTERISTICS						
Forward Voltage	V_{SD}	V_{GS} = 0 V, I_S = 0.35A	0.5	0.7	1.5	V


Typical Characteristics (Ta=25°C, unless otherwise noted)

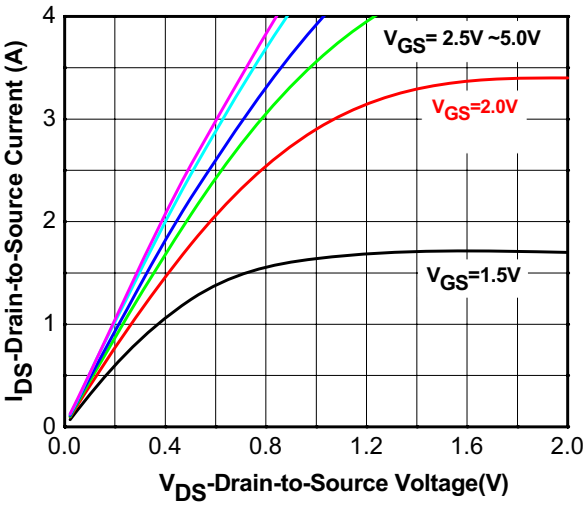


Output characteristics

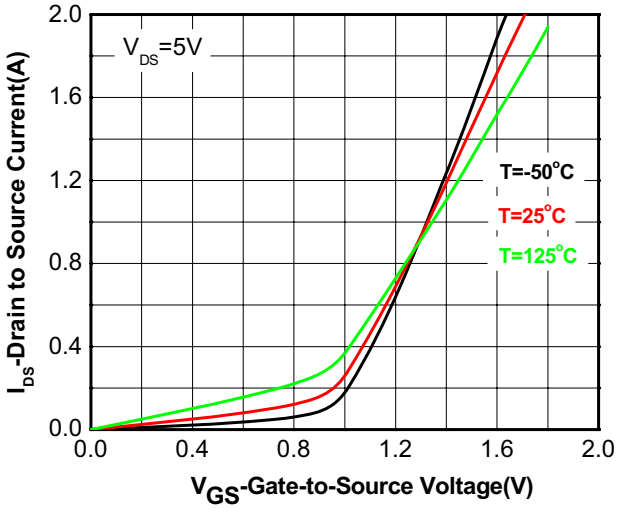


Transfer characteristics

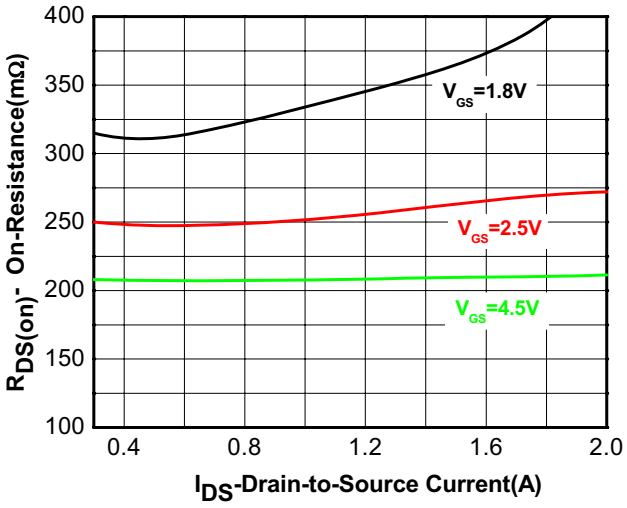


On-Resistance vs. Drain current

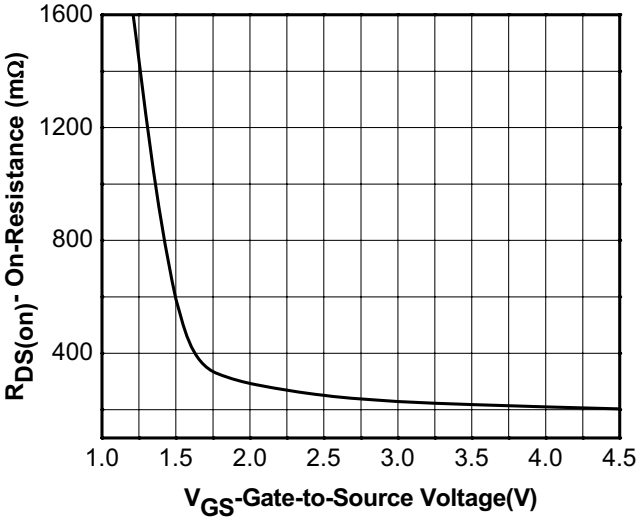


On-Resistance vs. Gate-to-Source voltage

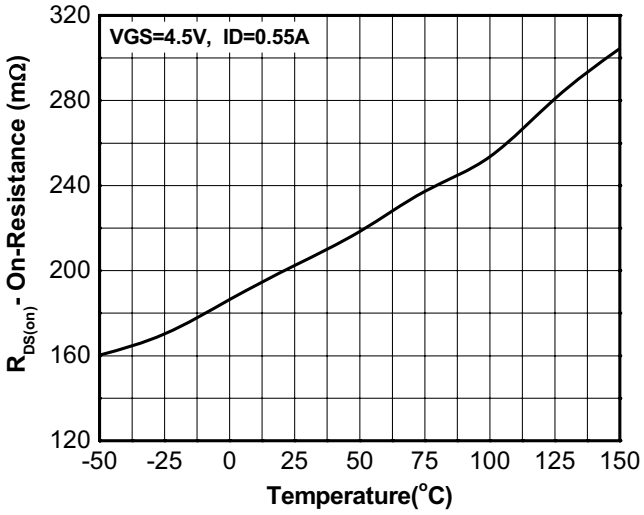


On-Resistance vs. Junction temperature

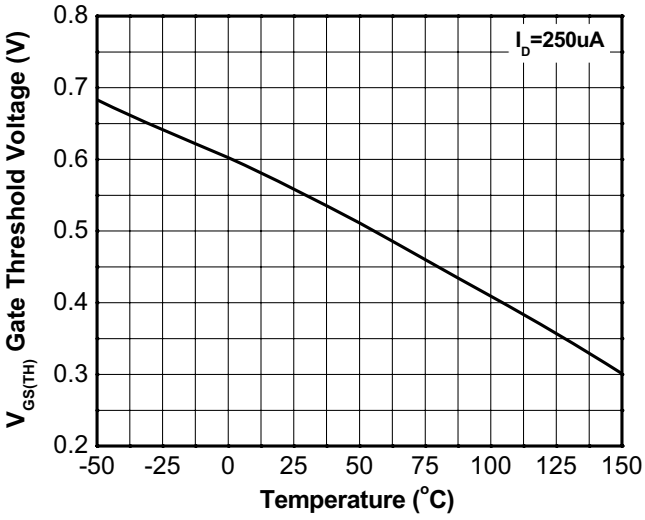


Threshold voltage vs. Temperature

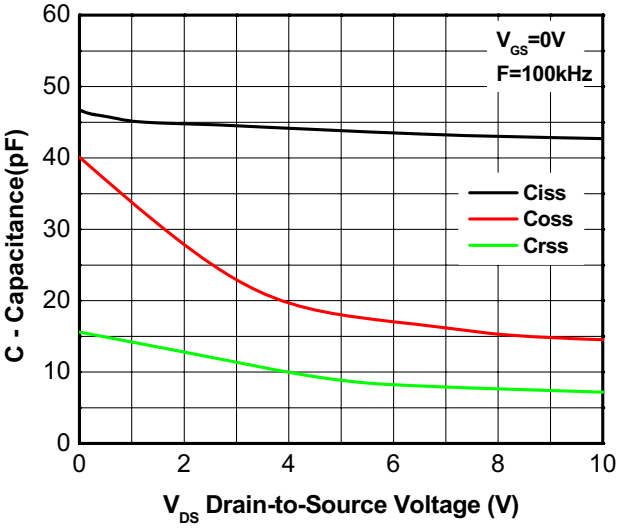


Capacitance

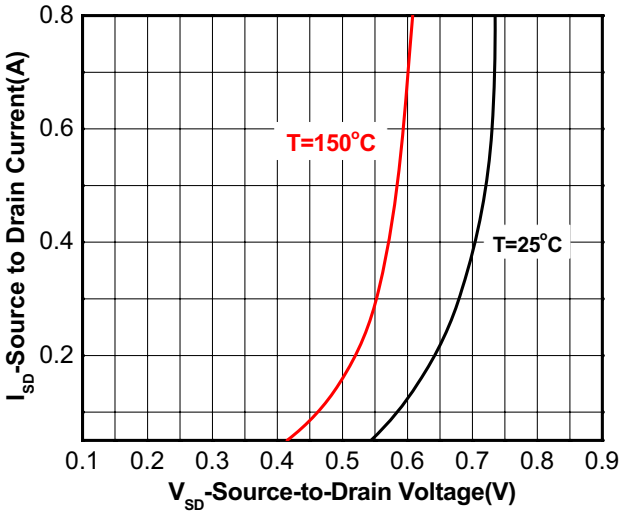

Body diode forward voltage

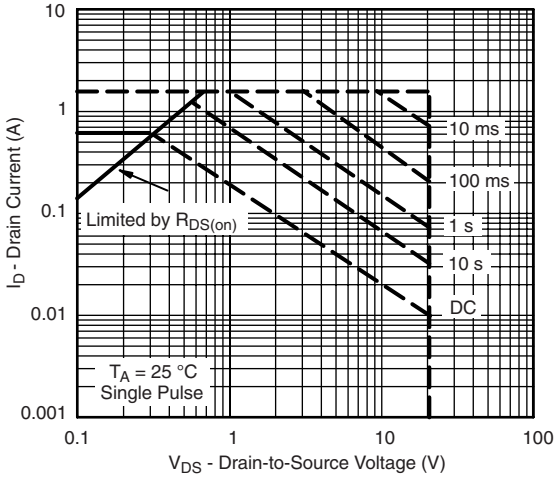


Safe operating power

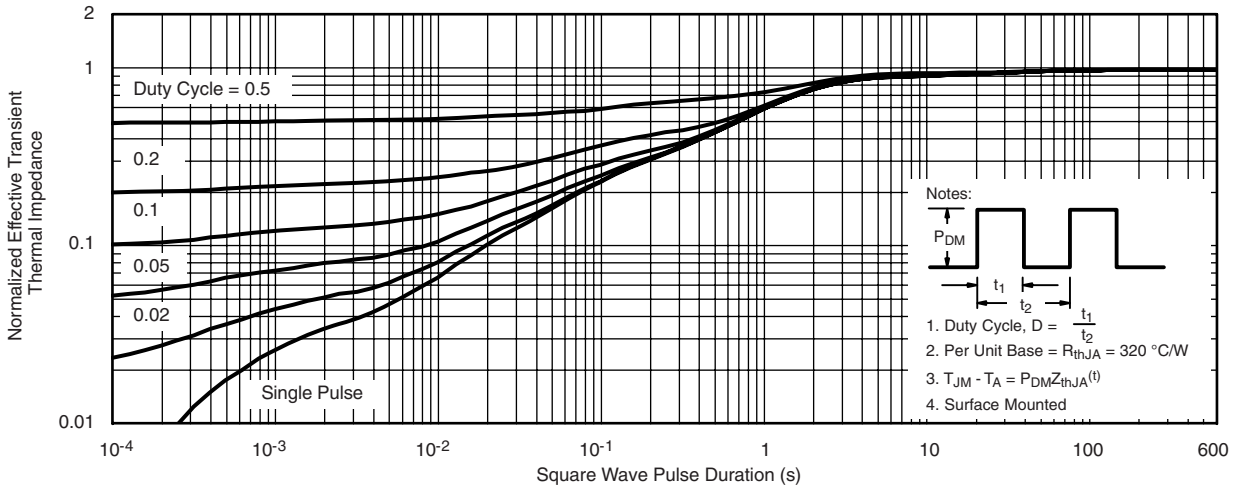

Transient thermal response (Junction-to-Ambient)

Package outline dimensions

SOT-23

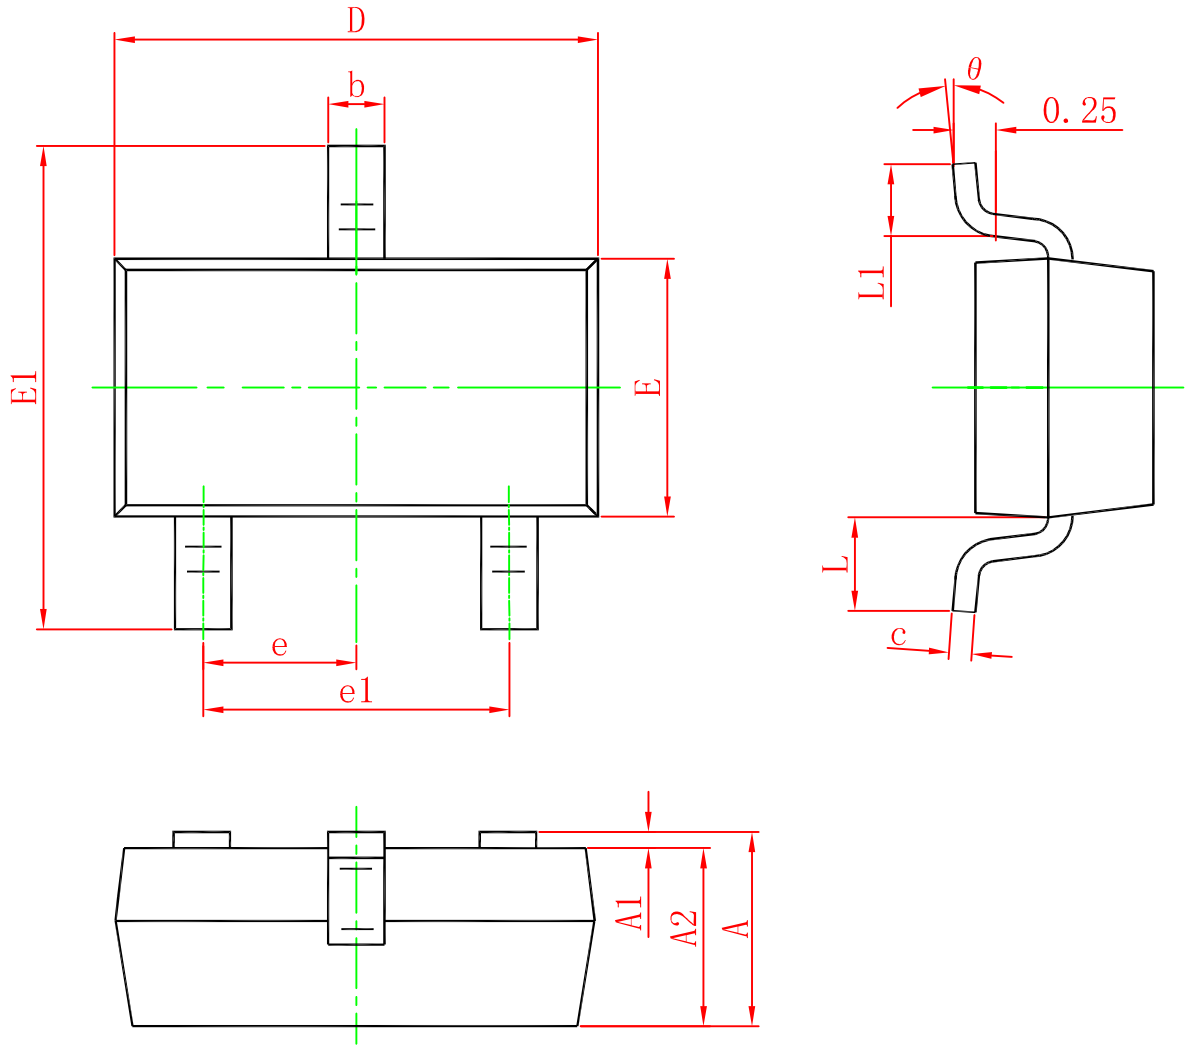

Symbol	Dimensions in millimeter		
	Min.	Typ.	Max.
A	0.900	1.025	1.150
A1	0.000	0.050	0.100
A2	0.900	0.975	1.050
b	0.300	0.400	0.500
c	0.080	0.115	0.150
D	2.800	2.900	3.000
E	1.200	1.300	1.400
E1	2.250	2.400	2.550
e	0.950TYP		
e1	1.800	1.900	2.000
L	0.550REF		
L1	0.300		0.500
θ	0°		8°