DC/DC Converter

WRA_P- 3WR2 & WRB_P- 3WR2 Series

MORNSUN®

3W,wide input isolated & regulated DC-DC converter



Patent Protection CE RoHS

FEATURES

- Wide range of input voltage (2:1)
- DIP package
- Efficiency up to 86%
- 1.5KVDC isolation
- Short circuit protection(automatic recovery)
- Operating temperature range:-40° C ~ +85° C
- Meet CISPR22/EN55022 CLASS A
- Meet EN60950

The WRA_P-3WR2 & WRB_P-3WR2 Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board. For these DC-DC converters, you can reduce the failure points of design, and save the manpower, material and time cost in developing micro power supply, and also ensure better quality, stability, safety protection, and reliability for the end products.

These products apply to where:

1) Input voltage range ≤2:1;

2) 1.5KVDC input and output isolation;

3) Output regulated and low ripple noise is required.

In circuits such as industrial control, electric power, communication system power supply, etc.

Selection Guide

Part No.	Input Voltage (VDC)		Output		Efficiency (%,Typ.) @ Full Load	Max. Capacitive Load② (μF)	certification
	Nominal (Range)	Max.①	Output Voltage (VDC)	Output Current (mA) (Max./Min.)			
WRA0505P-3WR2	5 (4.5-9)	11	±5	±300/±15	76	2200	--
WRA0512P-3WR2			±12	±125/±6	78	1800	
WRA0515P-3WR2			±15	±100/±5	78	1000	
WRB0505P-3WR2			5	600/30	74	4700	
WRB0512P-3WR2			12	250/12	77	2700	
WRB0515P-3WR2			15	200/10	77	2200	
WRA1205P-3WR2	12 (9-18)	20	±5	±300/±15	81	2200	
WRA1209P-3WR2			±9	±166/±8	84	2000	
WRA1212P-3WR2			±12	±125/±6	84	1800	
WRA1215P-3WR2			±15	±100/±5	85	1000	
WRB1203P-3WR2			3.3	909/46	74	4700	
WRB1205P-3WR2			5	600/30	81	4700	
WRB1212P-3WR2			12	250/12	83	2700	
WRB1215P-3WR2			15	200/10	82	2200	
WRB1224P-3WR2			24	125/6	83	1800	
WRA2405P-3WR2	24 (18-36)	40	±5	±300/±15	82	2200	
WRA2412P-3WR2			±12	±125/±6	84	1800	
WRA2415P-3WR2			±15	±100/±5	84	1000	
WRB2403P-3WR2			3.3	909/46	78	4700	
WRB2405P-3WR2			5	600/30	81	4700	CE
WRB2412P-3WR2			12	250/12	86	2700	--
WRB2415P-3WR2			15	200/10	86	2200	
WRB2424P-3WR2			24	125/6	85	1800	

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

WRA4805P-3WR2	48 (36-75)	80	±5	±300/±15	82	2200	--
WRA4812P-3WR2			±12	±125/±6	84	1800	
WRA4815P-3WR2			±15	±100/±5	85	1000	
WRB4803P-3WR2			3.3	909/46	76	4700	
WRB4805P-3WR2			5	600/30	82	4700	
WRB4812P-3WR2			12	250/12	86	2700	
WRB4815P-3WR2			15	200/10	86	2200	

Note:
①. Absolute maximum rating without damage on the converter, but it isn't recommended;
②. For dual output converter, the given value is the same for each output.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load /no-load)	5VDC input	--	811/40	--	mA
	12VDC input		309/30		
	24VDC input		155/15		
	48VDC input		77/5		
Reflected Ripple Current	5VDC input	--	20	--	
	12VDC input		30		
	24VDC input		30		
	48VDC input		30		
Input impulse Voltage (1sec. max.)	5VDC input	-0.7	--	12	VDC
	12VDC input		--	25	
	24VDC input		--	50	
	48VDC input		--	100	
Starting Voltage	5VDC input	--	--	4.5	
	12VDC input	--	--	9	
	24VDC input	--	--	18	
	48VDC input	--	--	36	
Input Filter		Pi filter			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		--	±1	±3	%
No load output Voltage Accuracy	Input voltage range	--	±1.5	±5	
Balance of Output Voltage	Dual output, balanced load	--	±0.5	±1	
Linear Regulation	Full load, the input voltage is from low voltage to high voltage	--	±0.2	±0.5	
Load Regulation	5%-100% load	--	±0.2	±0.5	
Transient Recovery Time	25% load step change	--	0.5	2	ms
Transient Response Deviation		--	±2	±5	%
Temperature Coefficient	Full load	--	±0.02	±0.03	%/°C
Ripple&Noise*	20MHz bandwidth	--	50	80	mV p-p
Short circuit Protection	Input voltage range	Continuous, self-recovery			

*Note: * Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation.*

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	1500	--	--	VDC
Insulation Resistance	Input-output, isolation voltage 500VDC	1000	--	--	MΩ

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Isolation Capacitance	Input-output, 100KHz/0.1V	--	120	--	pF
Operating Temperature	Derating if the temperature is ≥85°C (see Fig. 1)	-40	--	85	℃
Storage Temperature		-55	--	125	
Casing Temperature Rise	Ta=25℃	--	25	--	
Hand Soldering	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	300	
Storage Humidity	Non-condensing	--	--	95	%
Switching Frequency(PFM mode)	100% load, nominal input voltage	--	200	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours

Physical Specifications

Casing Material	Plastic(UL94-V0)
Dimensions	31.60*20.30*10.20 mm
Weight	14g(Typ.)
Cooling	Free convection

EMC Specifications

EMI	Conducted emission	CISPR22/EN55022	CLASS A(Bare component)/CLASS B (see Fig.3-② for recommended circuit)	
	Radiated emission	CISPR22/EN55022	CLASS A(Bare component)/CLASS B (see Fig.3-② for recommended circuit)	
EMS	Electrostatic discharge	IEC/EN61000-4-2	Contact ±4KV/ Air ±8KV	perf. Criteria B
	Radiation immunity	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (see Fig.3-① for recommended circuit)	perf. Criteria B
	Surge immunity	IEC/EN61000-4-5	±2KV (see Fig.3-①for recommended circuit)	perf. Criteria B
	Conducted disturbance immunity	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
	Immunities of voltage dip, drop and short interruption	IEC/EN61000-4-29	0-70%	perf. Criteria B

Product Characteristic Curve




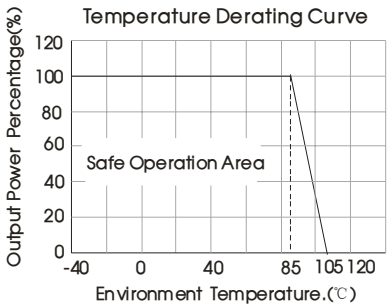



Fig. 1

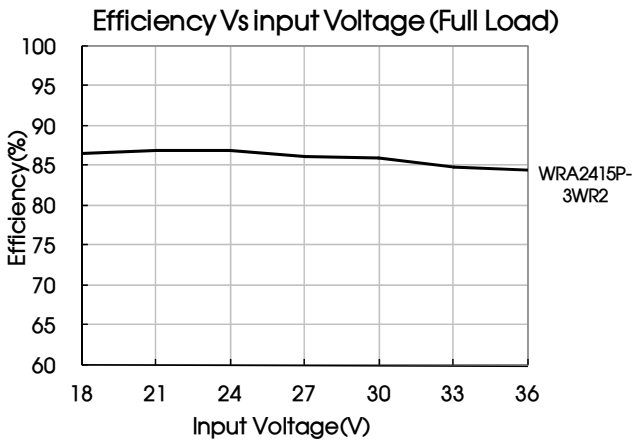

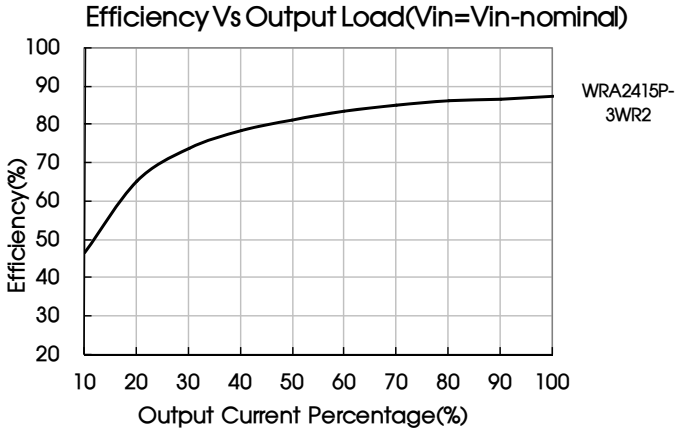

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

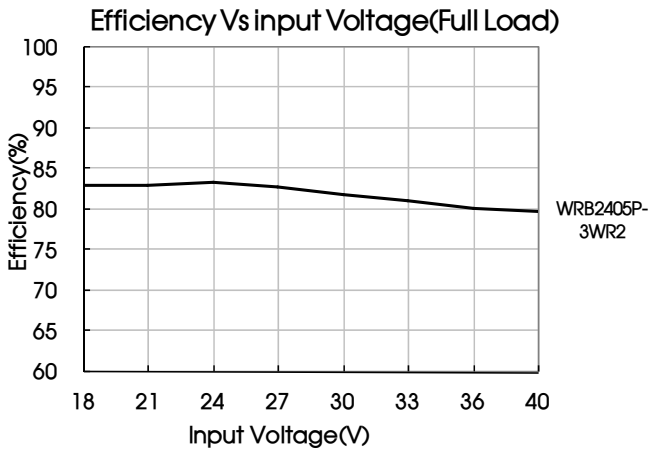

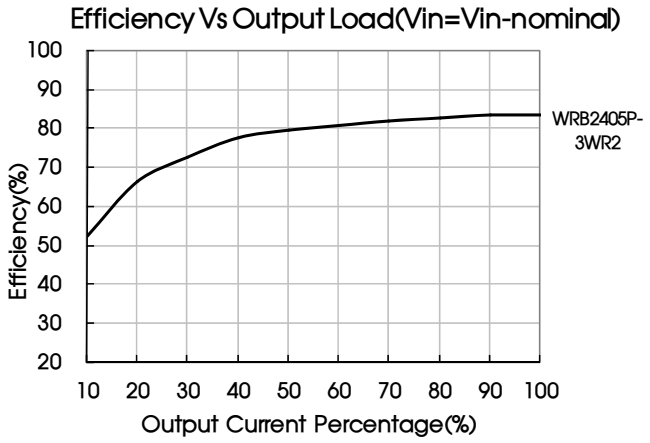

Design Reference

1. Output load requirements

To ensure that the module can work efficiently and reliably, its output min. load shall be no lower than 5% of the rated load when using, or the output ripple may increase rapidly. Ensure that the product working load must be higher than 5% of the rated load.

2. Typical application

All the DC/DC converters of this series are tested according to the recommended circuit (see Fig. 2) before delivery.

If it is required to further reduce input and output ripple, properly increase the input & output of additional capacitors Cin and Cout or select capacitors of low equivalent impedance provided that the capacitance is no larger than the max. capacitive load of the product.

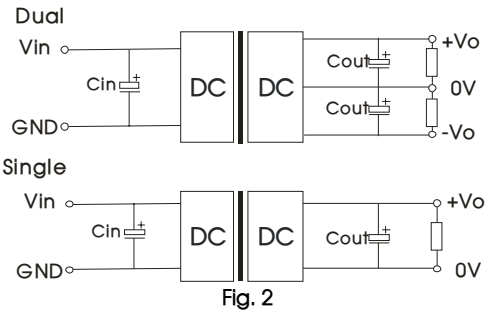


Fig. 2

Vin	5V&12V	24V&48V
Cin	100μF	10μF~47μF
Cout	10μF	

3. EMC solution-recommended circuit

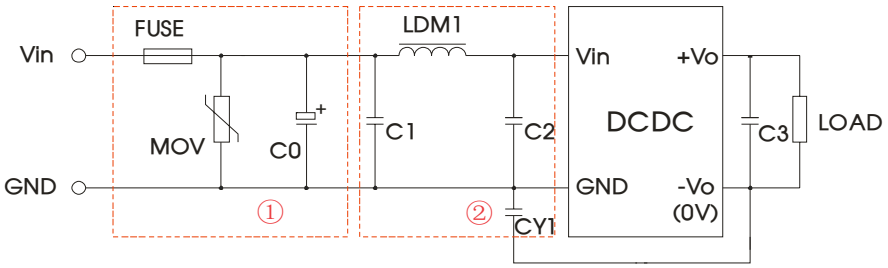


Fig. 3

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Parameter description:

Model	Vin:5V	Vin:12V	Vin:24V	Vin:48V
FUSE	Slow blown fuses according to the actual input current selections of the clients			
MOV	--	S14K25	S14K35	S14K60
C0	1000μF/16V	1000μF/25V	330μF/50V	330μF/100V
C1	4.7μF/50V			4.7μF/100V
LDM1	12μH			
C2	4.7μF/50V			4.7μF /100V
C3	10μF			
CY1	1nF/2KV			

Note: ①.Part ① in the Fig. 3 is used for EMS test and part ② for EMI filtering; selected based on needs.
②.If there is no recommended parameters, the model no require the external component.

EMC solution-recommended circuit PCB layout

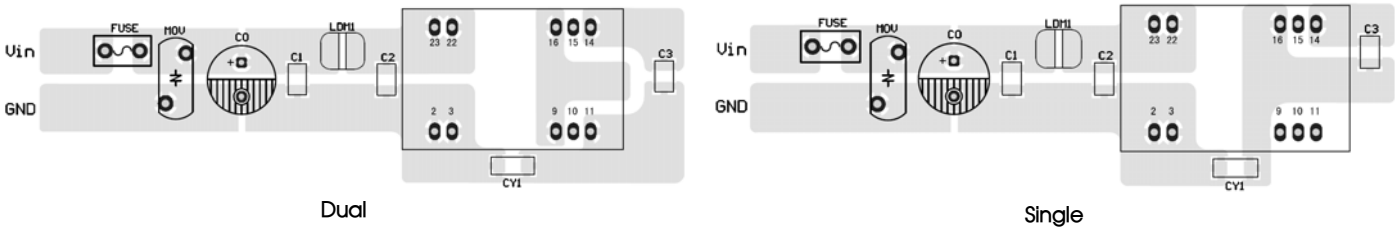


Fig. 4
Note: Note: the min. distance of the bonding pads between input grounding and output grounding shall be ≥ 2mm.

4. Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module(see Fig. 5).

Generally: Vin=5V Iave =1400mA
Vin=12V Iave=620mA
Vin=24V Iave=310mA
Vin=48V Iave =150mA


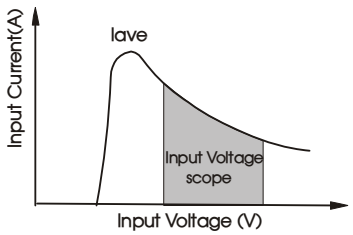


Fig. 5


5. For more information please find DC-DC converter application notes on www.mornsun-power.com

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Dimensions and Recommended Layout

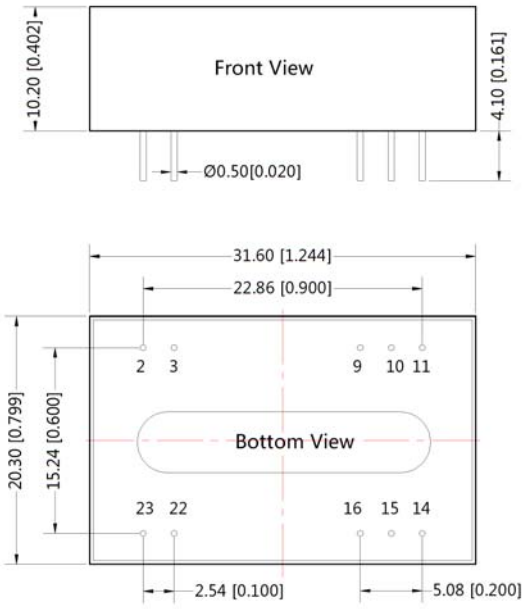

Note:
Unit :mm[inch]
Pin diameter tolerances :±0.10[±0.004]
General tolerances:±0.50[±0.020]

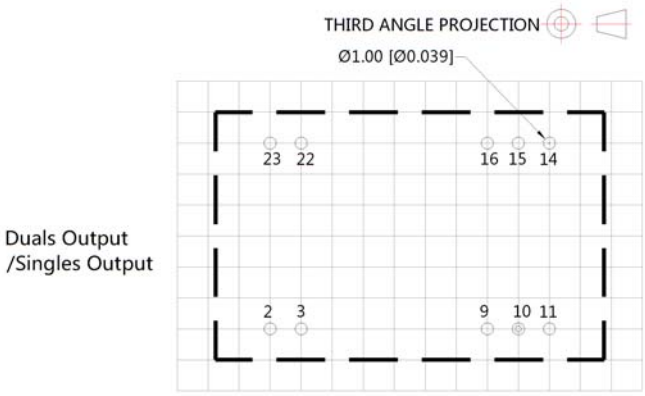

Duals Output
/Singles Output

Note:Grid 2.54*2.54mm

Pin-Out		
Pin	Single	Dual
2,3	GND	GND
9	NC	0V
10,15	NC	NC
11	NC	-Vo
14	+Vo	+Vo
16	0V	0V
22,23	Vin	Vin

NC: No Connection

Note:

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58210008;
2. The min. load shall be no lower than 5%, or the output ripple may increase rapidly; If the product is operated under the min. required load, the product performance cannot be guaranteed to comply with all performance indexes in the Manual, but the reliability of the product will not be influenced;
3. The unbalance degree of the recommended dual output module load: ⩽ 5%; if the degree exceeds ±5%, then the product performances cannot be guaranteed to comply with all the performance indicators in the manual, and please directly contact our technicians for specific information;
4. The max. capacitive load should be tested within the input voltage range and under full load conditions;
5. Unless otherwise specified, data in this datasheet should be tested under the conditions of Ta=25℃, humidity<75% when inputting nominal voltage and outputting rated load;
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
8. We can provide product customization service;
9. Specifications of this product are subject to changes without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.
Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation