

WRE_P-3W & WRF_P-3W Series

3W, WIDE INPUT, ISOLATED & REGULATED SINGLE/DUAL OUTPUT DIP DC-DC CONVERTER

multi-country patent protection **RoHS**

FEATURES

Efficiency Up To 82%
Operating Temperature: -40°C to +85°C
3KVDC Isolation
Short circuit protection(automatic recovery)
No external component required
Internal SMD construction
Industry standard pinout
MTBF>1,000,000 hours
UL94-V0 Package
RoHS Compliance

APPLICATIONS


The WRE_P-3W & WRF_P-3W Series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage ranges $\geq 2:1$);
- 2) Where isolation is necessary between input and output(Isolation Voltage ≤ 3000 VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

APPLICATIONS

WRE1205P-3W

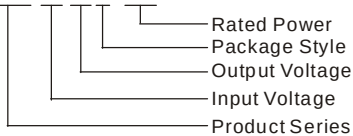

MORNSUN Science & Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

PRODUCT PROGRAM

Part Number	Input			Output			Efficiency (%, Typ)
	Voltage (VDC)			Voltage (VDC)	Current (mA)		
	Nominal	Range	Max*		Max	Min	
WRE1205P-3W	12	9-18	22	±5	±300	±30	74
WRE1209P-3W				±9	±167	±16	76
WRE1212P-3W				±12	±125	±12	78
WRE1215P-3W				±15	±100	±10	79
WRF1205P-3W				5	600	60	74
WRF1209P-3W				9	333	33	76
WRF1212P-3W				12	250	25	78
WRF1215P-3W				15	200	20	79
WRE2405P-3W	24	18-36	40	±5	±300	±30	78
WRE2409P-3W				±9	±167	±16	80
WRE2412P-3W				±12	±125	±12	82
WRE2415P-3W				±15	±100	±10	81
WRF2405P-3W				5	600	60	78
WRF2409P-3W				9	333	33	80
WRF2412P-3W				12	250	25	82
WRF2415P-3W				15	200	20	81

*Input voltage can't exceed this value, or will cause the permanent damage.

Note:The load shouldn't be less than 10%,otherwise ripple will increase dramatically.

Operation under 10% load will not damage the converter; However, they may not meet all specification listed.

ISOLATION SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1mA max	3000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min	Typ	Max	Units
Output power	See below products program	0.3		3	W
Positive voltage accuracy	Refer to recommended circuit		±1	±3	%
Negative voltage accuracy	Refer to recommended circuit		±3	±5	
Load regulation	From 10% To 100% load		±0.5	±1*	
Line regulation(at full load)	Input voltage from low to high		±0.2	±0.5	
Temperature Drift(Vout)	Refer to recommended circuit			±0.03	%/°C
Ripple & Noise **	20MHz bandwidth		50	100	mVp-p
Switching frequency	100% load, nominal Input voltage		300		KHz

* Dual output models unbalanced load: ±5%.

**Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


Note:

1. All specifications measured at $T_A=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.


COMMON SPECIFICATION

Item	Test Conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	
Temp. rise at full load			15		
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling		Free air convection			
Short circuit protection		Continuous, automatic recovery			
Case material		Plastic (UL94-V0)			
MTBF		100			K hours
Weight			17		g

TYPICAL CHARECTERISTICS

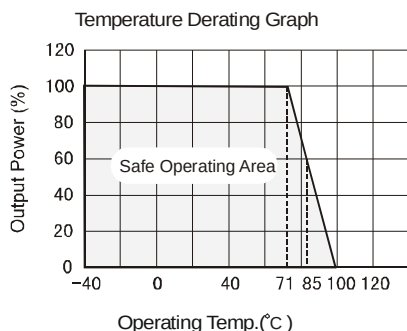


OUTLINE DIMENSIONS & PIN CONNECTIONS

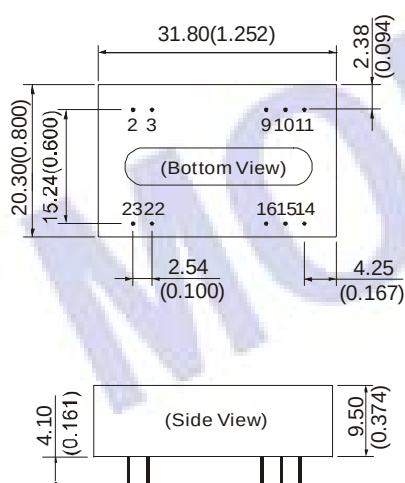

First Angle Projection

RECOMMENDED FOOTPRINT
Top view, grid: 2.54mm(0.1inch),
diameter: 1.00mm(0.039inch)

Single /Dual Output



FOOTPRINT DETAILS

Pin	Single	Dual
2,3	GND	GND
9	NC	0V
11	NC	-Vo
10,15	NC	NC
14	+Vo	+Vo
16	0V	0V
22,23	Vin	Vin

NC: No Connection

Note:
Unit: mm(inch)
Pin diameter: 0.50mm(0.020inch)
Pin diameter tolerances: $\pm 0.05\text{mm}(\pm 0.002\text{inch})$
General tolerances: $\pm 0.25\text{mm}(\pm 0.010\text{inch})$


APPLICATION NOTE

Requirement On Output Load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load no less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

Recommended Circuit

All the WRE_P-3W & WRF_P-3W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (see Figure 1).

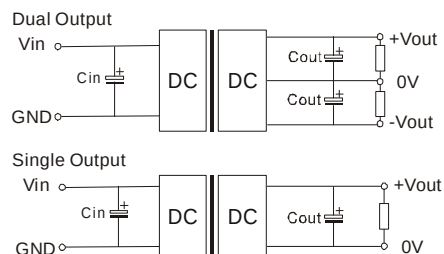

(Figure 1)

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

General: Cin: 12V 100μF
24V 10μF-47μF
Cout: 10μF/100mA


. Output External Capacitor Table (Table 1)

Single Vout (VDC)	Cout (μF)	Dual Vout (VDC)	Cout (μF)
5	1000	±5	680
9	680	±9	470
12	470	±12	330
15	330	±15	220

Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module. (Figure 2)

General: $I_p \leq 1.4 \times I_{in-max}$

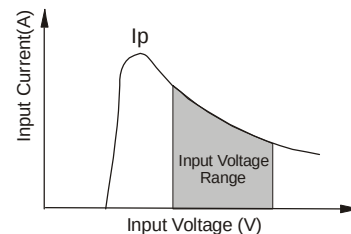

(Figure 2)

No parallel connection or plug and play.