128Kx32 SRAM & 512Kx32 FLASH MIXED MODULE

FEATURES

- Access times of 25ns (SRAM) and 120ns (FLASH)
- Packaging
  - 66 pin, PGA Type, 1.385" square HIP, hermetic ceramic HIP (Package 402)
  - 68 lead, hermetic CQFP (G2T), 22.4mm (0.880") square (Package 509) 4.57mm (0.180") height Designed to fit JEDEC 68 lead 0.990" CQFJ footprint (FIGURE 2). Package to be developed.
- 128Kx32 SRAM
- 512Kx32 5V Flash
- Organized as 128Kx32 of SRAM and 512Kx32 of Flash Memory with common data bus
- Low power CMOS
- Commercial, industrial and military temperature ranges
- TTL compatible inputs and outputs
- Built-in decoupling caps and multiple ground pins for low noise operation
- Weight - 13 grams typical

FLASH MEMORY FEATURES

- 100,000 erase/program cycles minimum
- Sector architecture
  - 8 equal size sectors of 64KBytes each
  - Any combination of sectors can be concurrently erased. Also supports full chip erase
- 5V programming; 5V ± 10% supply
- Embedded erase and program algorithms
- Hardware write protection
- Page program operation and internal program control time.

Note: For programming information refer to flash programming 4M5 application note.

* This product is under development, is not qualified or characterized and is subject to change without notice.

PIN CONFIGURATION FOR WSF41632-22H2X


Top View

1	12	23		34	45	56
I/O8	FWE2#	I/O15		I/O24	VCC	I/O31
I/O9	SWE2#	I/O14		I/O25	SWE4#	I/O30
I/O10	GND	I/O13		I/O26	FWE4#	I/O29
A14	I/O11	I/O12		A7	I/O27	I/O28
A16	A10	OE#		A12	A4	A1
A11	A9	A17		SWE1#	A5	A2
A0	A15	FWE1#		A13	A6	A3
A18	VCC	I/O7		A8	FWE3#	I/O23
I/O0	FCS#	I/O6		I/O16	SWE3#	I/O22
I/O1	SCS#	I/O5		I/O17	GND	I/O21
I/O2	I/O3	I/O4		I/O18	I/O19	I/O20
11	22	33		44	55	66

Pin Description

D0-31	Data Inputs/Outputs
A0-18	Address Inputs
SWE#1-4	SRAM Write Enables
SCS#	SRAM Chip Select
OE#	Output Enable
VCC	Power Supply
GND	Ground
NC	Not Connected
FWE#1-4	Flash Write Enables
FCS	Flash Chip Select


Block Diagram

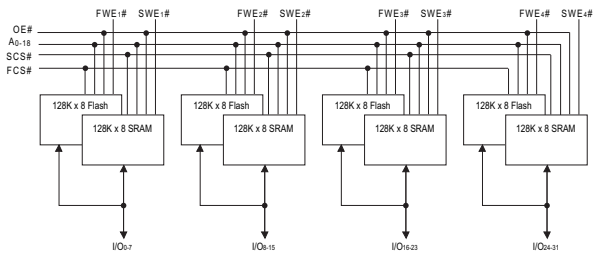


White Electronic Designs Corp. reserves the right to change products or specifications without notice.

FIGURE 2 – PIN CONFIGURATION FOR WSF41632-22G2TX

Top View

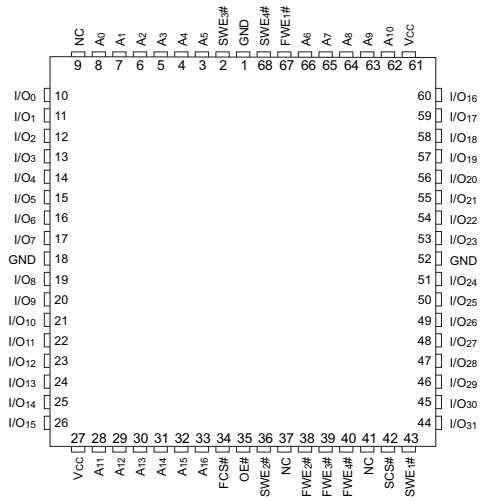


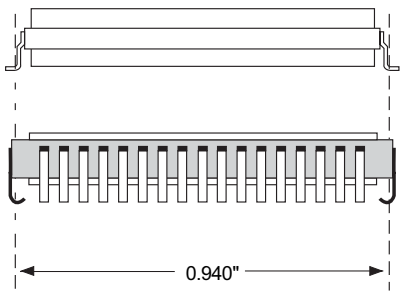

Pin Description

D0-31	Data Inputs/Outputs
A0-18	Address Inputs
SWE#1-4	SRAM Write Enables
SCS#	SRAM Chip Select
OE#	Output Enable
VCC	Power Supply
GND	Ground
NC	Not Connected
FWE#1-4	Flash Write Enables
FCS	Flash Chip Select

Block Diagram

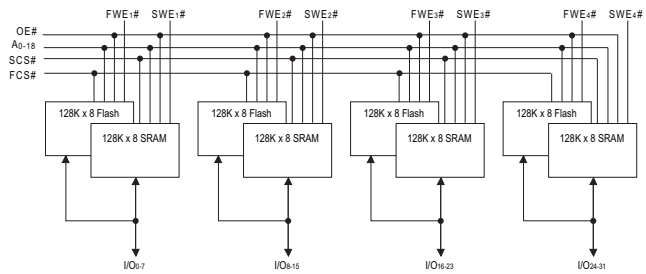

The WEDC 68 lead G2T CQFP fills the same fit and function as the JEDEC 68 lead CQFJ or 68 PLCC. But the G2T has the TCE and lead inspection advantage of the CQFP form.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Operating Temperature	T_A	-55	+125	°C
Storage Temperature	T_{STG}	-65	+150	°C
Signal Voltage Relative to GND	V_G	-0.5	7.0	V
Junction Temperature	T_J		150	°C
Supply Voltage	V_{CC}	-0.5	7.0	V

Parameter	
Flash Data Retention	20 years
Flash Endurance (write/erase cycles)	100,000 min

NOTE:
1. Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min	Max	Unit
Supply Voltage	V_{CC}	4.5	5.5	V
Input High Voltage	V_{IH}	2.2	V_{CC} + 0.3	V
Input Low Voltage	V_{IL}	-0.5	+0.8	V

SRAM TRUTH TABLE

SCS#	OE#	SWE#	Mode	Data I/O	Power
H	X	X	Standby	High Z	Standby
L	L	H	Read	Data Out	Active
L	H	H	Read	High Z	Active
L	X	L	Write	Data In	Active

NOTE:
1. FCS# must remain high when SCS# is low.

CAPACITANCE

Ta = +25°C

Parameter	Symbol	Conditions	Max	Unit
OE# capacitance	C_{OE}	V_{IN} = 0 V, f = 1.0 MHz	80	pF
F/S WE_{1-4}# capacitance	C_{WE}	V_{IN} = 0 V, f = 1.0 MHz	30	pF
F/S CS# capacitance	C_{CS}	V_{IN} = 0 V, f = 1.0 MHz	50	pF
D_{0-31} capacitance	$C_{I/O}$	V_{IN} = 0 V, f = 1.0 MHz	30	pF
A_{0-16} capacitance	C_{AD}	V_{IN} = 0 V, f = 1.0 MHz	80	pF

This parameter is guaranteed by design but not tested.

DC CHARACTERISTICS

V_{CC} = 5.0V, V_{SS} = 0V, -55°C ≤ T_A ≤ +125°C

Parameter	Symbol	Conditions	Min	Max	Unit
Input Leakage Current	I_{LI}	V_{CC} = 5.5, V_{IN} = GND to V_{CC}		10	µA
Output Leakage Current	I_{LO}	SCS# = V_{IH}, OE# = V_{IH}, V_{OUT} = GND to V_{CC}		10	µA
SRAM Operating Supply Current x 32 Mode	I_{CCx32}	SCS# = V_{IL}, OE# = FCS# = V_{IH}, f = 5MHz, V_{CC} = 5.5		620	mA
Standby Current	I_{SB}	FCS# = SCS# = V_{IH}, OE# = V_{IH}, f = 5MHz, V_{CC} = 5.5		80	mA
SRAM Output Low Voltage	V_{OL}	I_{OL} = 8mA, V_{CC} = 4.5		0.4	V
SRAM Output High Voltage	V_{OH}	I_{OH} = -4.0mA, V_{CC} = 4.5	2.4		V
Flash V_{CC} Active Current for Read (1)	I_{CC1}	FCS# = V_{IL}, OE# = SCS# = V_{IH}		260	mA
Flash V_{CC} Active Current for Program or Erase (2)	I_{CC2}	FCS# = V_{IL}, OE# = SCS# = V_{IH}		300	mA
Flash Output Low Voltage	V_{OL}	I_{OL} = 8.0mA, V_{CC} = 4.5		0.45	V
Flash Output High Voltage	V_{OH1}	I_{OH} = -2.5 mA, V_{CC} = 4.5	0.85 x V_{CC}		V
Flash Output High Voltage	V_{OH2}	I_{OH} = -100 µA, V_{CC} = 4.5	V_{CC} -0.4		V
Flash Low V_{CC} Lock Out Voltage	V_{LKO}		3.2	4.2	V

NOTES:
1. The I_{CC} current listed includes both the DC operating current and the frequency dependent component (@ 5 MHz). The frequency component typically is less than 2mA/MHz, with OE# at V_{IH}.
2. I_{CC} active while Embedded Algorithm (program or erase) is in progress.
3. DC test conditions: V_{IL} = 0.3V, V_{IH} = V_{CC} - 0.3V

White Electronic Designs Corp. reserves the right to change products or specifications without notice.

SRAM AC CHARACTERISTICS

V_{CC} = 5.0V, -55°C ≤ T_A ≤ +125°C

Parameter Read Cycle	Symbol	-25 Min	-25 Max	Units
Read Cycle Time	t_{RC}	25		ns
Address Access Time	t_{AA}		25	ns
Output Hold from Address Change	t_{OH}	0		ns
Chip Select Access Time	t_{ACS}		25	ns
Output Enable to Output Valid	t_{OE}		15	ns
Chip Select to Output in Low Z	t_{CLZ}[1]	3		ns
Output Enable to Output in Low Z	t_{OLZ}[1]	0		ns
Chip Disable to Output in High Z	t_{CHZ}[1]		12	ns
Output Disable to Output in High Z	t_{OHZ}[1]		12	ns

1. This parameter is guaranteed by design but not tested.


SRAM AC CHARACTERISTICS

V_{CC} = 5.0V, -55°C ≤ T_A ≤ +125°C

Parameter Write Cycle	Symbol	-25 Min	-25 Max	Units
Write Cycle Time	t_{WC}	25		ns
Chip Select to End of Write	t_{CW}	20		ns
Address Valid to End of Write	t_{AW}	20		ns
Data Valid to End of Write	t_{DW}	15		ns
Write Pulse Width	t_{WP}	20		ns
Address Setup Time	t_{AS}	3		ns
Address Hold Time	t_{AH}	0		ns
Output Active from End of Write	t_{OW}[1]	3		ns
Write Enable to Output in High Z	t_{WHZ}[1]		15	ns
Data Hold from Write Time	t_{DH}	0		ns

1. This parameter is guaranteed by design but not tested.

FIGURE 2 – AC TEST CIRCUIT

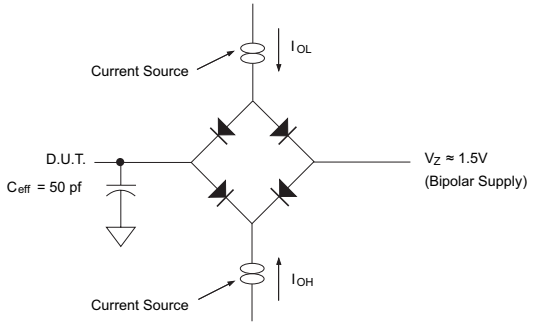


AC Test Conditions

Parameter	Typ	Unit
Input Pulse Levels	V_{IL} = 0, V_{IH} = 3.0	V
Input Rise and Fall	5	ns
Input and Output Reference Level	1.5	V
Output Timing Reference Level	1.5	V

Notes:
V_Z is programmable from -2V to +7V.
I_{OL} & I_{OH} programmable from 0 to 16mA.
Tester Impedance Z0 = 75 Ω.
V_Z is typically the midpoint of V_{OH} and V_{OL}.
I_{OL} & I_{OH} are adjusted to simulate a typical resistive load circuit.
ATE tester includes jig capacitance.

White Electronic Designs Corp. reserves the right to change products or specifications without notice.


FIGURE 3 – SRAM TIMING WAVEFORM - READ CYCLE

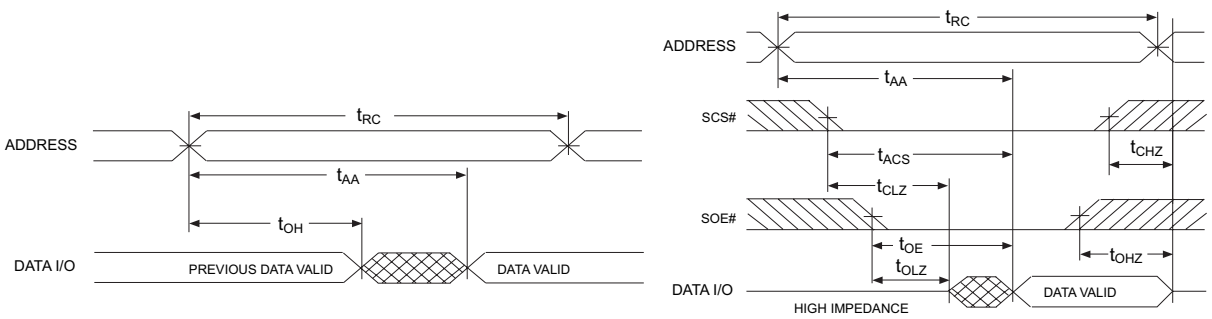

READ CYCLE 1, (SCS# = OE# = V_{IL}, SWE# = FCS# = V_{IH})


READ CYCLE 2, (SWE# = FCS# = V_{IH})

FIGURE 4 – SRAM WRITE CYCLE - SWE# CONTROLLED

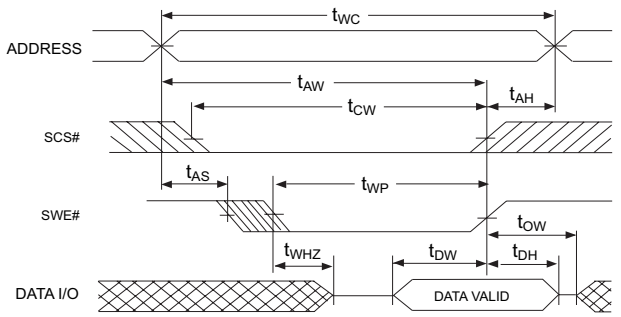

WRITE CYCLE 1, SWE# CONTROLLED (FCS# = V_{IH})

FIGURE 5 – SRAM WRITE CYCLE - SCS# CONTROLLED

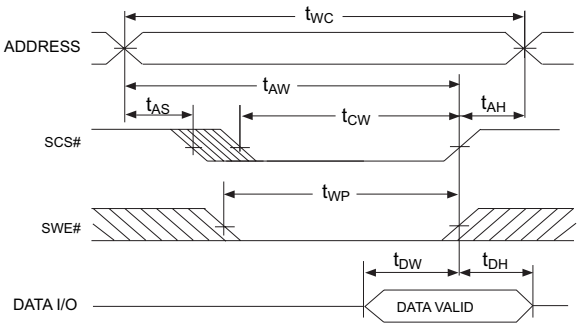

WRITE CYCLE 2, SCS# CONTROLLED (FCS# = V_{IH})

White Electronic Designs Corp. reserves the right to change products or specifications without notice.

FLASH AC CHARACTERISTICS – WRITE/ERASE/PROGRAM OPERATIONS, FWE# CONTROLLED

V_{CC} = 5.0V, -55°C ≤ T_A ≤ +125°C

Parameter	Symbol		-120 Min	-120 Max	Unit
Write Cycle Time	t_{AVAV}	t_{WC}	120		ns
Chip Select Setup Time	t_{ELWL}	t_{CS}	0		ns
Write Enable Pulse Width	t_{WLWH}	t_{WP}	50		ns
Address Setup Time	t_{AVWL}	t_{AS}	0		ns
Data Setup Time	t_{DVWH}	t_{DS}	50		ns
Data Hold Time	t_{WHDX}	t_{DH}	0		ns
Address Hold Time	t_{WLAX}	t_{AH}	50		ns
Write Enable Pulse Width High	t_{WHWL}	t_{WPH}	20		ns
Duration of Byte Programming Operation (1)	t_{WHWH1}			300	µs
Chip and Sector Erase Time (2)	t_{WHWH2}			15	sec
Read Recovery Time Before Write	t_{GHWL}		0		µs
V_{CC} Set-up Time		t_{VCS}	50		µs
Chip Programming Time				11	sec
Output Enable Setup Time		t_{OES}	0		ns
Output Enable Hold Time (4)		t_{OEH}	10		ns
Chip Erase Time (3)				64	sec

NOTES:
1. Typical value for t_{WHWH1} is 7ns.
2. Typical value for t_{WHWH2} is 1sec.
3. Typical value for Chip Erase Time is 8sec.
4. For Toggle and Data# Polling.

FLASH AC CHARACTERISTICS – READ ONLY OPERATIONS

V_{CC} = 5.0V, -55°C ≤ T_A ≤ +125°C

Parameter	Symbol		-120 Min	-120 Max	Unit
Read Cycle Time	t_{AVAV}	t_{RC}	120		ns
Address Access Time	t_{AVQV}	t_{ACC}		120	ns
Chip Select Access Time	t_{ELQV}	t_{CE}		120	ns
OE# to Output Valid	t_{GLQV}	t_{OE}		50	ns
Chip Select to Output High Z (1)	t_{EHQZ}	t_{DF}		30	ns
OE# High to Output High Z (1)	t_{GHQZ}	t_{DF}		30	ns
Output Hold from Address, FCS# or OE# Change, whichever is first	t_{AXQX}	t_{OH}	0		ns

1. Guaranteed by design, not tested.

White Electronic Designs Corp. reserves the right to change products or specifications without notice.

FLASH AC CHARACTERISTICS – WRITE/ERASE/PROGRAM OPERATIONS, FCS# CONTROLLED


V_{CC} = 5.0V, -55°C ≤ T_A ≤ +125°C

Parameter	Symbol		-120 Min	-120 Max	Unit
Write Cycle Time	t_{AVAV}	t_{WC}	120		ns
FWE# Setup Time	t_{WLEL}	t_{WS}	0		ns
FCS# Pulse Width	t_{ELEH}	t_{CP}	50		ns
Address Setup Time	t_{AVEL}	t_{AS}	0		ns
Data Setup Time	t_{DVEH}	t_{DS}	50		ns
Data Hold Time	t_{EHDX}	t_{DH}	0		ns
Address Hold Time	t_{ELAX}	t_{AH}	50		ns
FCS# Pulse Width High	t_{EHEL}	t_{CPH}	20		ns
Duration of Programming Operation (1)	t_{WHWH1}			300	µs
Sector Erase Time (2)	t_{WHWH2}			15	sec
Read Recovery Time	t_{GHEL}		0		ns
Chip Programming Time				11	sec
Chip Erase Time (3)				64	sec

NOTES:
1. Typical value for t_{WHWH1} is 7ns.
2. Typical value for t_{WHWH2} is 1sec.
3. Typical value for Chip Erase Time is 8sec.


White Electronic Designs Corp. reserves the right to change products or specifications without notice.

FIGURE 6 – AC WAVEFORMS FOR FLASH MEMORY READ OPERATIONS

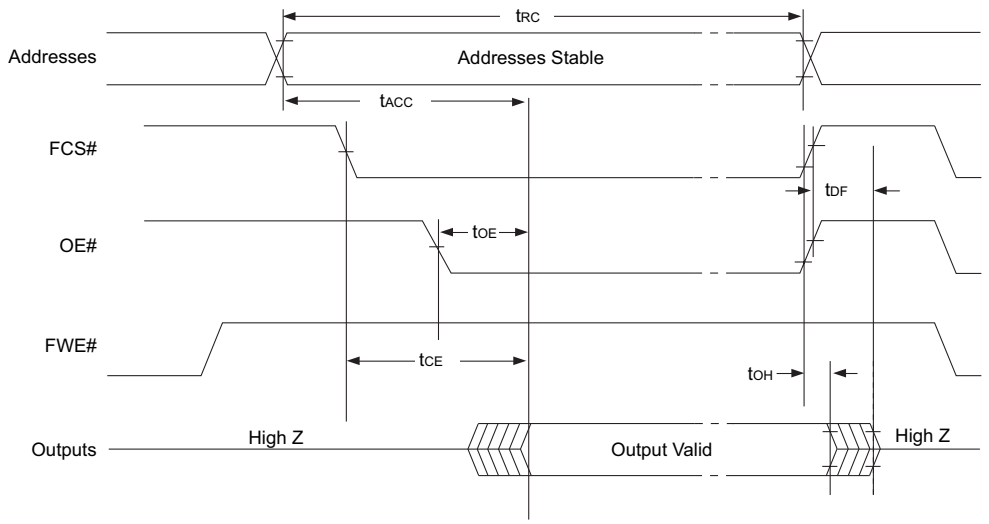


NOTE: SCS# = V_{IH}

FIGURE 7 – WRITE/ERASE/PROGRAM OPERATION, FLASH MEMORY FWE# CONTROLLED

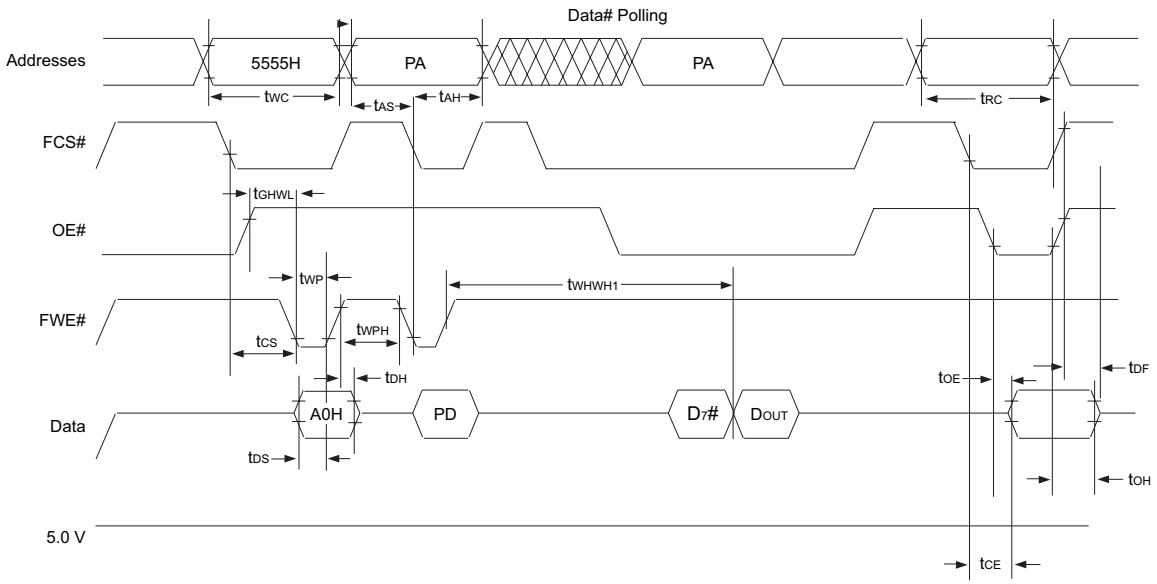


NOTES:
1. PA is the address of the memory location to be programmed.
2. PD is the data to be programmed at byte address.
3. D_7# is the output of the complement of the data written to the device.
4. D_{OUT} is the output of the data written to the device.
5. Figure indicates last two bus cycles of four bus cycle sequence.
6. SCS# = V_{IH}

FIGURE 8 – AC WAVEFORMS CHIP/SECTOR ERASE OPERATIONS FOR FLASH MEMORY

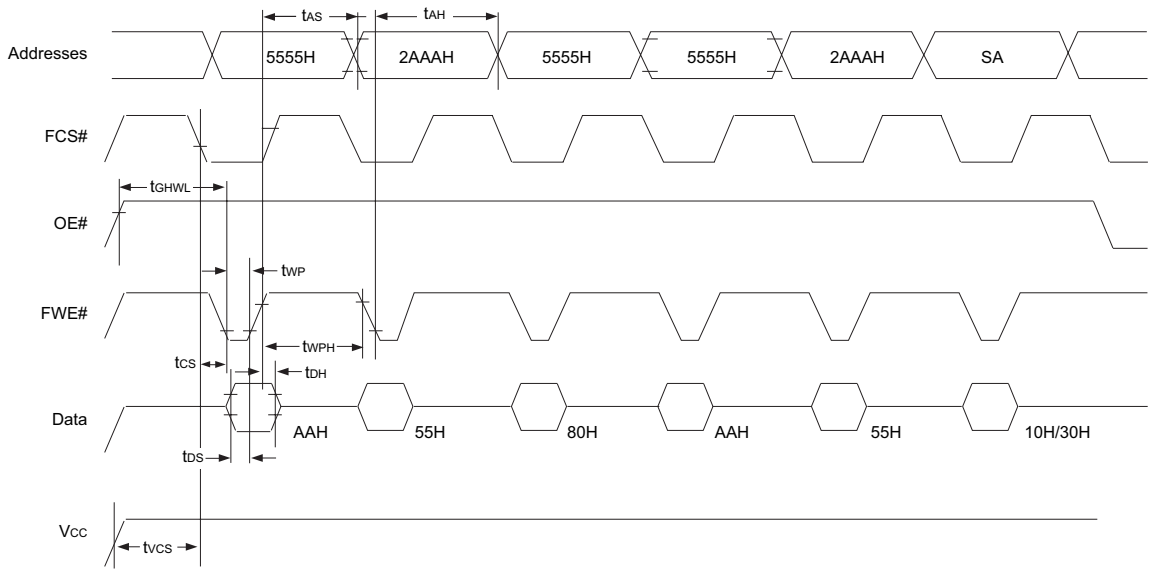


Notes:
1. SA is the sector address for Sector Erase.
2. SCS# = V_{IH}

FIGURE 9 – AC WAVEFORMS FOR DATA# POLLING DURING EMBEDDED ALGORITHM OPERATIONS FOR FLASH MEMORY

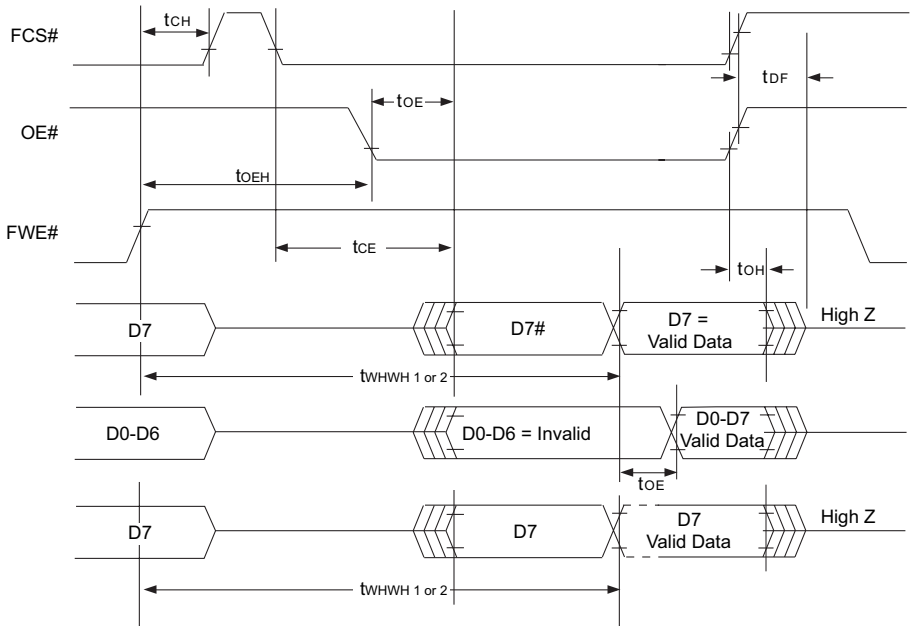


Note: SCS# = V_{IH}

FIGURE 10 – WRITE/ERASE/PROGRAM OPERATION FOR FLASH MEMORY, CS# CONTROLLED

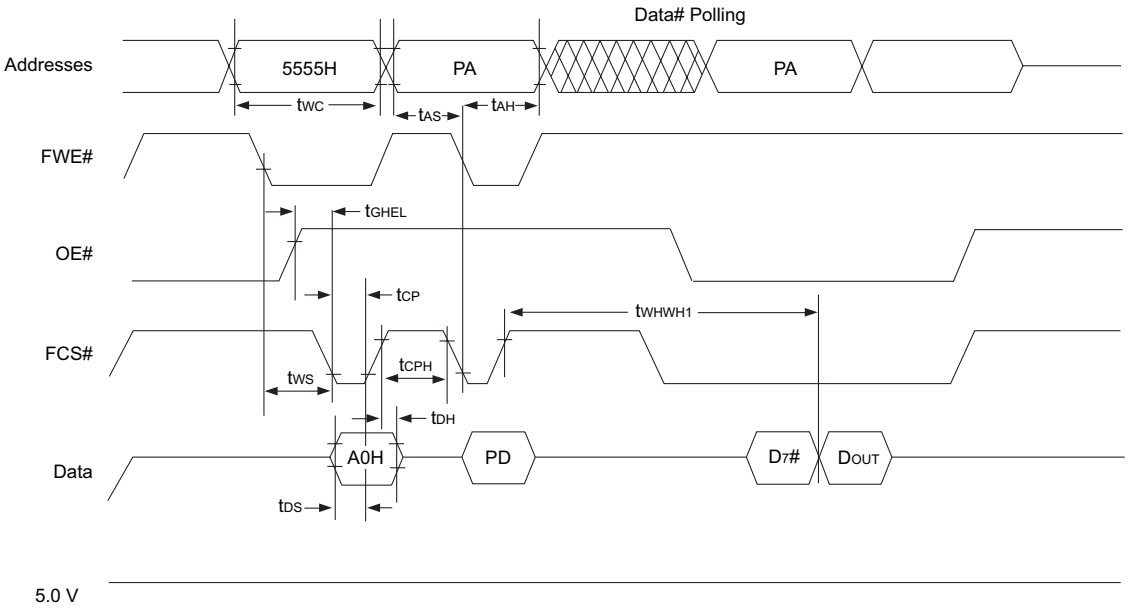

NOTES:
1. PA represents the address of the memory location to be programmed.
2. PD represents the data to be programmed at byte address.
3. D_7# is the output of the complement of the data written to the device.
4. D_{OUT} is the output of the data written to the device.
5. Figure indicates the last two bus cycles of a four bus cycle sequence.
6. SCS# = V_{IH}


PACKAGE 509: 68 LEAD, CERAMIC QUAD FLAT PACK, CQFP (G2T)

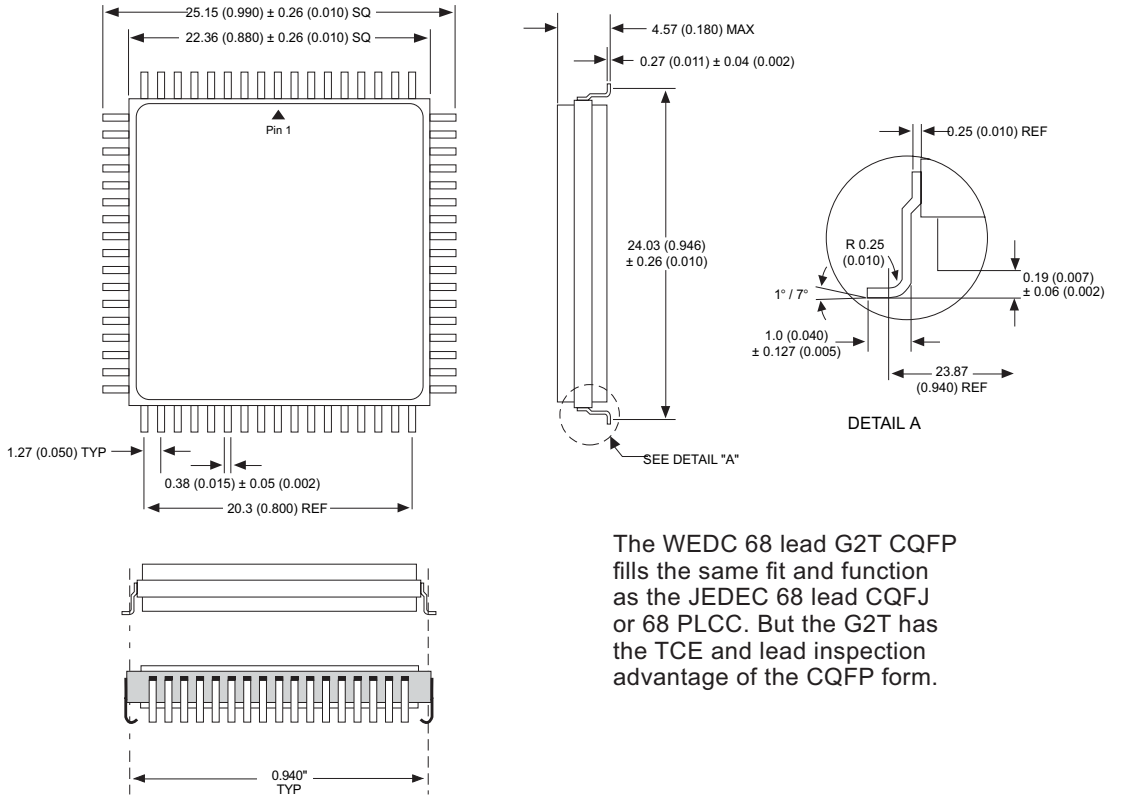

The WEDC 68 lead G2T CQFP fills the same fit and function as the JEDEC 68 lead CQFJ or 68 PLCC. But the G2T has the TCE and lead inspection advantage of the CQFP form.

ALL LINEAR DIMENSIONS ARE MILLIMETERS AND PARENTHETICALLY IN INCHES

PACKAGE 402: 66 PIN, PGA TYPE, CERAMIC HEX-IN-LINE PACKAGE, HIP (H2)

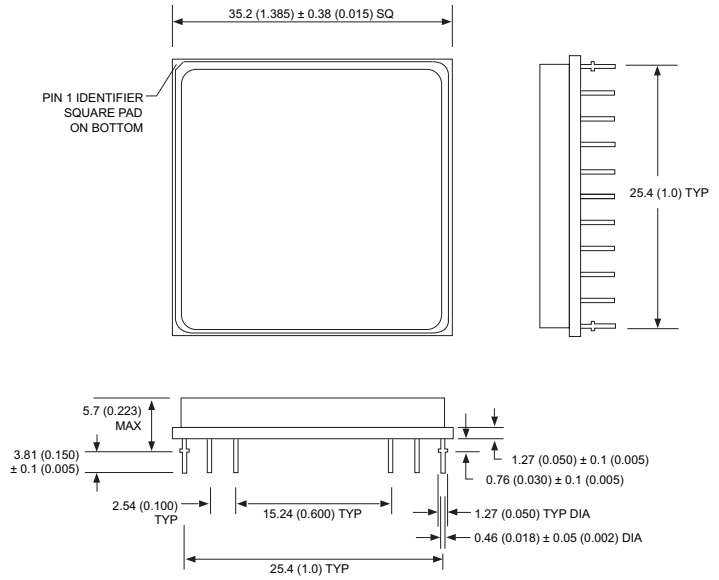

ALL LINEAR DIMENSIONS ARE MILLIMETERS AND PARENTHETICALLY IN INCHES

ORDERING INFORMATION

W S F 41632 - 22 X X X

LEAD FINISH:
Blank = Gold plated leads
A = Solder dip leads

DEVICE GRADE:

M = Military Screened	-55°C to +125°C
I = Industrial	-40°C to +85°C
C = Commercial	0°C to +70°C

PACKAGE TYPE:
H2 = Ceramic Hex In-line Package, HIP (Package 402)
G2T = 22.4mm Ceramic Quad Flat Pack, CQFP (Package 509)

ACCESS TIME (ns)
22 = 25ns SRAM and 120ns FLASH

ORGANIZATION, 128K x 32

Flash PROM

SRAM

WHITE ELECTRONIC DESIGNS CORP.

White Electronic Designs Corp. reserves the right to change products or specifications without notice.