




soberton inc.

WSP WATER
RESISTANT
SPEAKER

Acoustic Product Specification

Product Number: WSP-5008-57

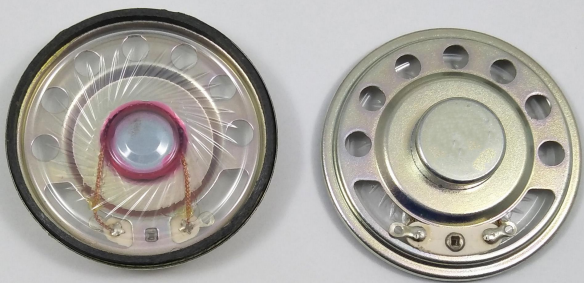

Release | Revision: A/2018

CONTENTS


This document contains the technical specifications for the water resistant speaker

- Page 1
- Specifications
- Dimensions
- Frequency Response

Specifications

Specification	Unit	WSP-5008-57
AC Impedance	Ω	8±15% at 1000Hz
Rated Input Power	Watt	2.0
Max Input Power	Watt	3.0
Resonant Frequency	Hz	530 ±20%
Frequency Range	Hz	F0~19.0KHz, average SPL±10dB
Output Sound Pressure Level	dB	95 ±3dB 0.1 Watt/10 cm, AVG. at 0.8, 1.0, 1.2, 1.5KHz
Operating Temperature	°C	-20°C ~ +50°C
Storage Temperature	°C	-40°C ~ +60°C
Dimension	mm	Ø 50.0 x H10.1
Distortion		3% maximum at 1000Hz, 2.0W
Polarity		Diaphragm shall move forward when a positive DC current is applied to the “+” or “Marked” terminal
Load Test		Audio Signal Generator at 4.0 Volt Total 48hrs and 20Hz ~ 20KHz resonant frequency
Abnormal Sound Test		Must be normal tested at 4.0 Volt sine wave
Ingress Rating		IP65

Dimensions

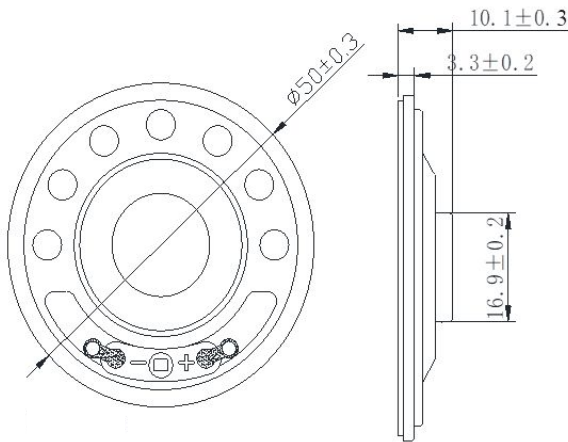

Unit: mm

Frequency Response

