



MODEL: WSP-7704
PRODUCT: Waterproof Speaker
EDITION: A/2017

soberton inc.

	Specification	Unit	WSP-7704
	AC Impedance	Ω	4 ±15% at 1000Hz
	Rated Input Power	Watt	3.0
	Max Input Power	Watt	4.0
	Resonant Frequency	Hz	330 ±20%
	Frequency Range	Hz	F0 ~ 10.0KHz, Average SPL ±10dB
	Output Sound Pressure Level	dB	102 ±3dB 1.0 Watt/ 1.0 Meter, AVG. at 0.8, 1.0, 1.2 , 1.5KHz
	Operating Temperature	˚C	-20˚C ~ +50˚C
	Storage Temperature	˚C	-40˚C ~ +60˚C
	Dimension	mm	77.2 x 77.2 x H21.0
	Distortion		3% maximum at 1000Hz, 3.0W
	Polarity	Diaphragm shall move forward when a positive DC current is applied to the "+" or "Marked" Terminal	
	Load Test	Audio Signal Generator at 3.46 Volt Total 48 hours and 20Hz ~ 20KHz resonant frequency	
	Abnormal Sound Test	Must be normal tested at 3.46 Volt sine wave	


DIMENSIONS

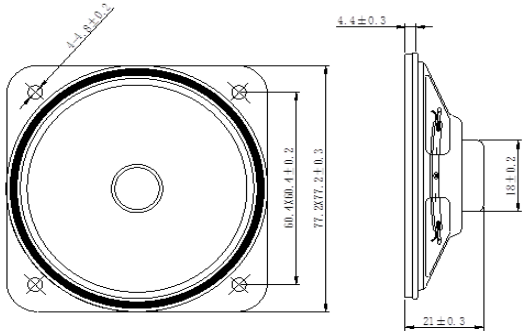

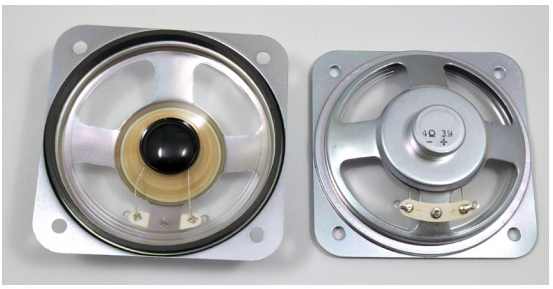

Unit: mm

FREQUENCY RESPONSE

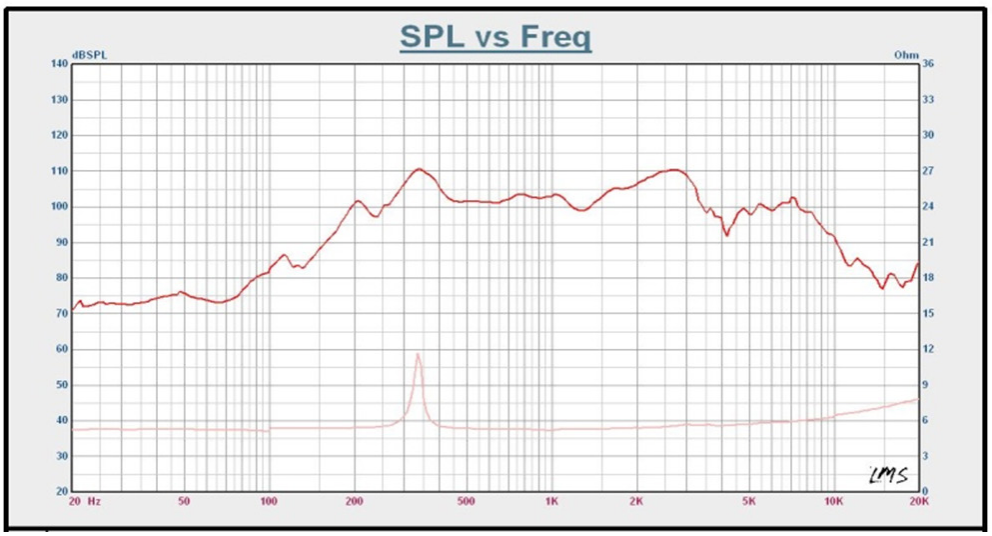

© 2017 SOBERTON INC. 211 NORTH 1ST STREET MINNEAPOLIS, MN 55401. PHONE: 612.849.6205 EMAIL: SOBERTON.US@GMAIL.COM